




**Part Number :** [2196791033](#)

**Product Description :** Micro-Latch-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, 2.00mm Pitch, Tin (Sn) Plating, 300.00mm Length, 3 Circuits, Natural

**Series Number :** 219679

**Status :** Active

**Product Category :** Power and Signal Cable Assemblies

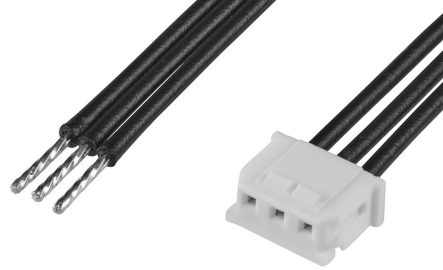

---

## Documents & Resources


### Drawings

[Drawing 2196791033\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

|                    |   |
|--------------------|---|
| GADSL/IMDS         | Not Relevant  |
| China RoHS         |  |
| EU ELV             | Not Relevant  |
| Low-Halogen Status | Not Low-Halogen per IEC 61249-2-21  |
| REACH SVHC         | Not Contained per D(2024)4144-DC (27 June 2024)                                       |
| EU RoHS            | Compliant per EU 2015/863   |

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### EU RoHS Certificate of Compliance

---

## Part Details

### General

|                        |   |
|------------------------|---|
| Status                 | Active  |
| Category               | Power and Signal Cable Assemblies   |
| Series                 | 219679  |
| Description            | Micro-Latch-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, 2.00mm Pitch, Tin (Sn) Plating, 300.00mm Length, 3 Circuits, Natural |
| Application            | Signal, Wire-to-Board   |
| Assembly Configuration | Single Ended Connector  |
| Connector to Connector | Micro-Latch-to-Pigtail  |
| Product Family         | Micro-Latch Wire-to-Board Connector System  |
| Product Name           | Micro-Latch   |
| Type                   | Discrete Wire Assembly  |
| UPC                    | 195842860025  |

### Electrical

|                               |                  |
|-------------------------------|------------------|
| Current - Maximum per Contact | 2.5A             |
| Voltage - Maximum             | 250V AC (RMS)/DC |

### Physical

|                                |                 |
|--------------------------------|-----------------|
| Cable Length                   | 300.00mm        |
| Circuits (Loaded)              | 3               |
| Circuits (maximum)             | 3               |
| Color - Resin                  | Natural         |
| Gender                         | Female-Pigtail  |
| Lock to Mating Part            | Yes             |
| Material - Metal               | Phosphor Bronze |
| Material - Plating Mating      | Tin             |
| Material - Plating Termination | Tin             |
| Material - Resin               | Polyester       |
| Net Weight                     | 4.007/g         |
| Number of Rows                 | 1               |
| Packaging Type                 | Bag             |

|                             |                      |
|-----------------------------|----------------------|
| Pitch - Mating Interface    | 2.00mm               |
| Plating min - Mating        | 0.900µm              |
| Plating min - Termination   | 0.900µm              |
| Single Ended                | Yes                  |
| Termination Interface Style | Crimp or Compression |
| Wire/Cable Type             | UL 10002             |
| Wire Insulation Diameter    | 1.40mm               |
| Wire Size (AWG)             | 22                   |

---

## Mates With / Use With

### Mates with Part(s)

| Description                                | Part Number  |
|--|--------------|
| Micro-Latch Vertical Single Row Headers    | <u>53253</u> |
| Micro-Latch Right-Angle Single Row Headers | <u>53254</u> |