




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.18	阿树

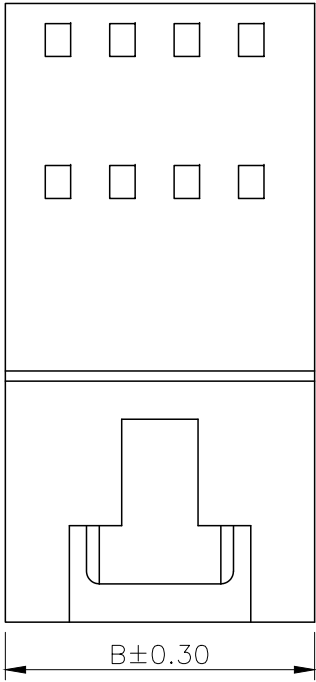


POLARIZATION SLOT LOCATION



02 Pin



03 Pin

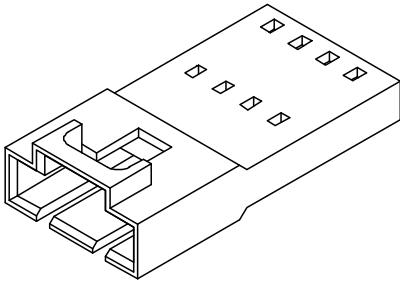



- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ

PART NO.:

X9556 H F-XX-PT
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Category:F-Female Housing
④Row No.Pin No:XX-02~20P
⑤Material:PT-PBT UL94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	7.12	12	27.94	32.52
03	5.08	9.66	13	30.48	35.06
04	7.62	12.20	14	33.02	37.60
05	10.16	14.74	15	35.56	40.14
06	12.70	17.28	16	38.10	42.68
07	15.24	19.82	17	40.64	45.22
08	17.78	22.36	18	43.18	47.76
09	20.32	24.90	19	45.72	50.30
10	22.86	27.44	20	48.26	52.84
11	25.40	29.98	/		

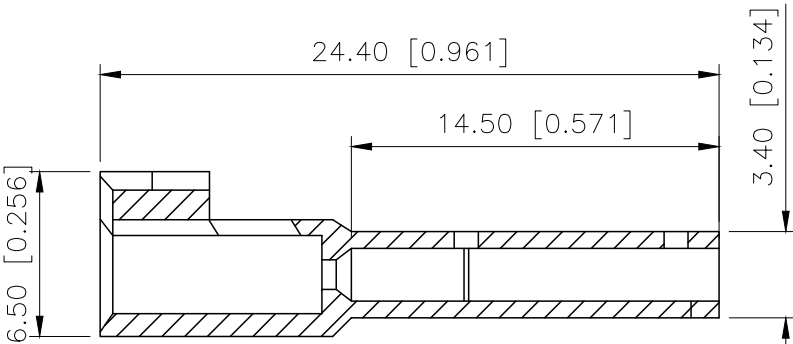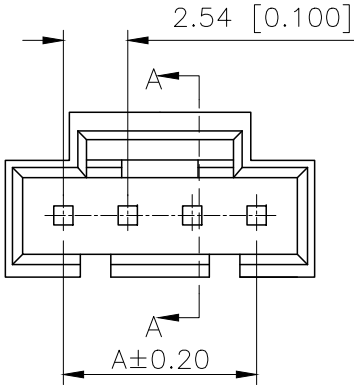

SECTION:A-A

X9556HF-XX-PT	PBT	X9556H	X9556TM
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X9556HF-XX-PT
APPROVED		SIZE:	A4	DWG NO.:	