


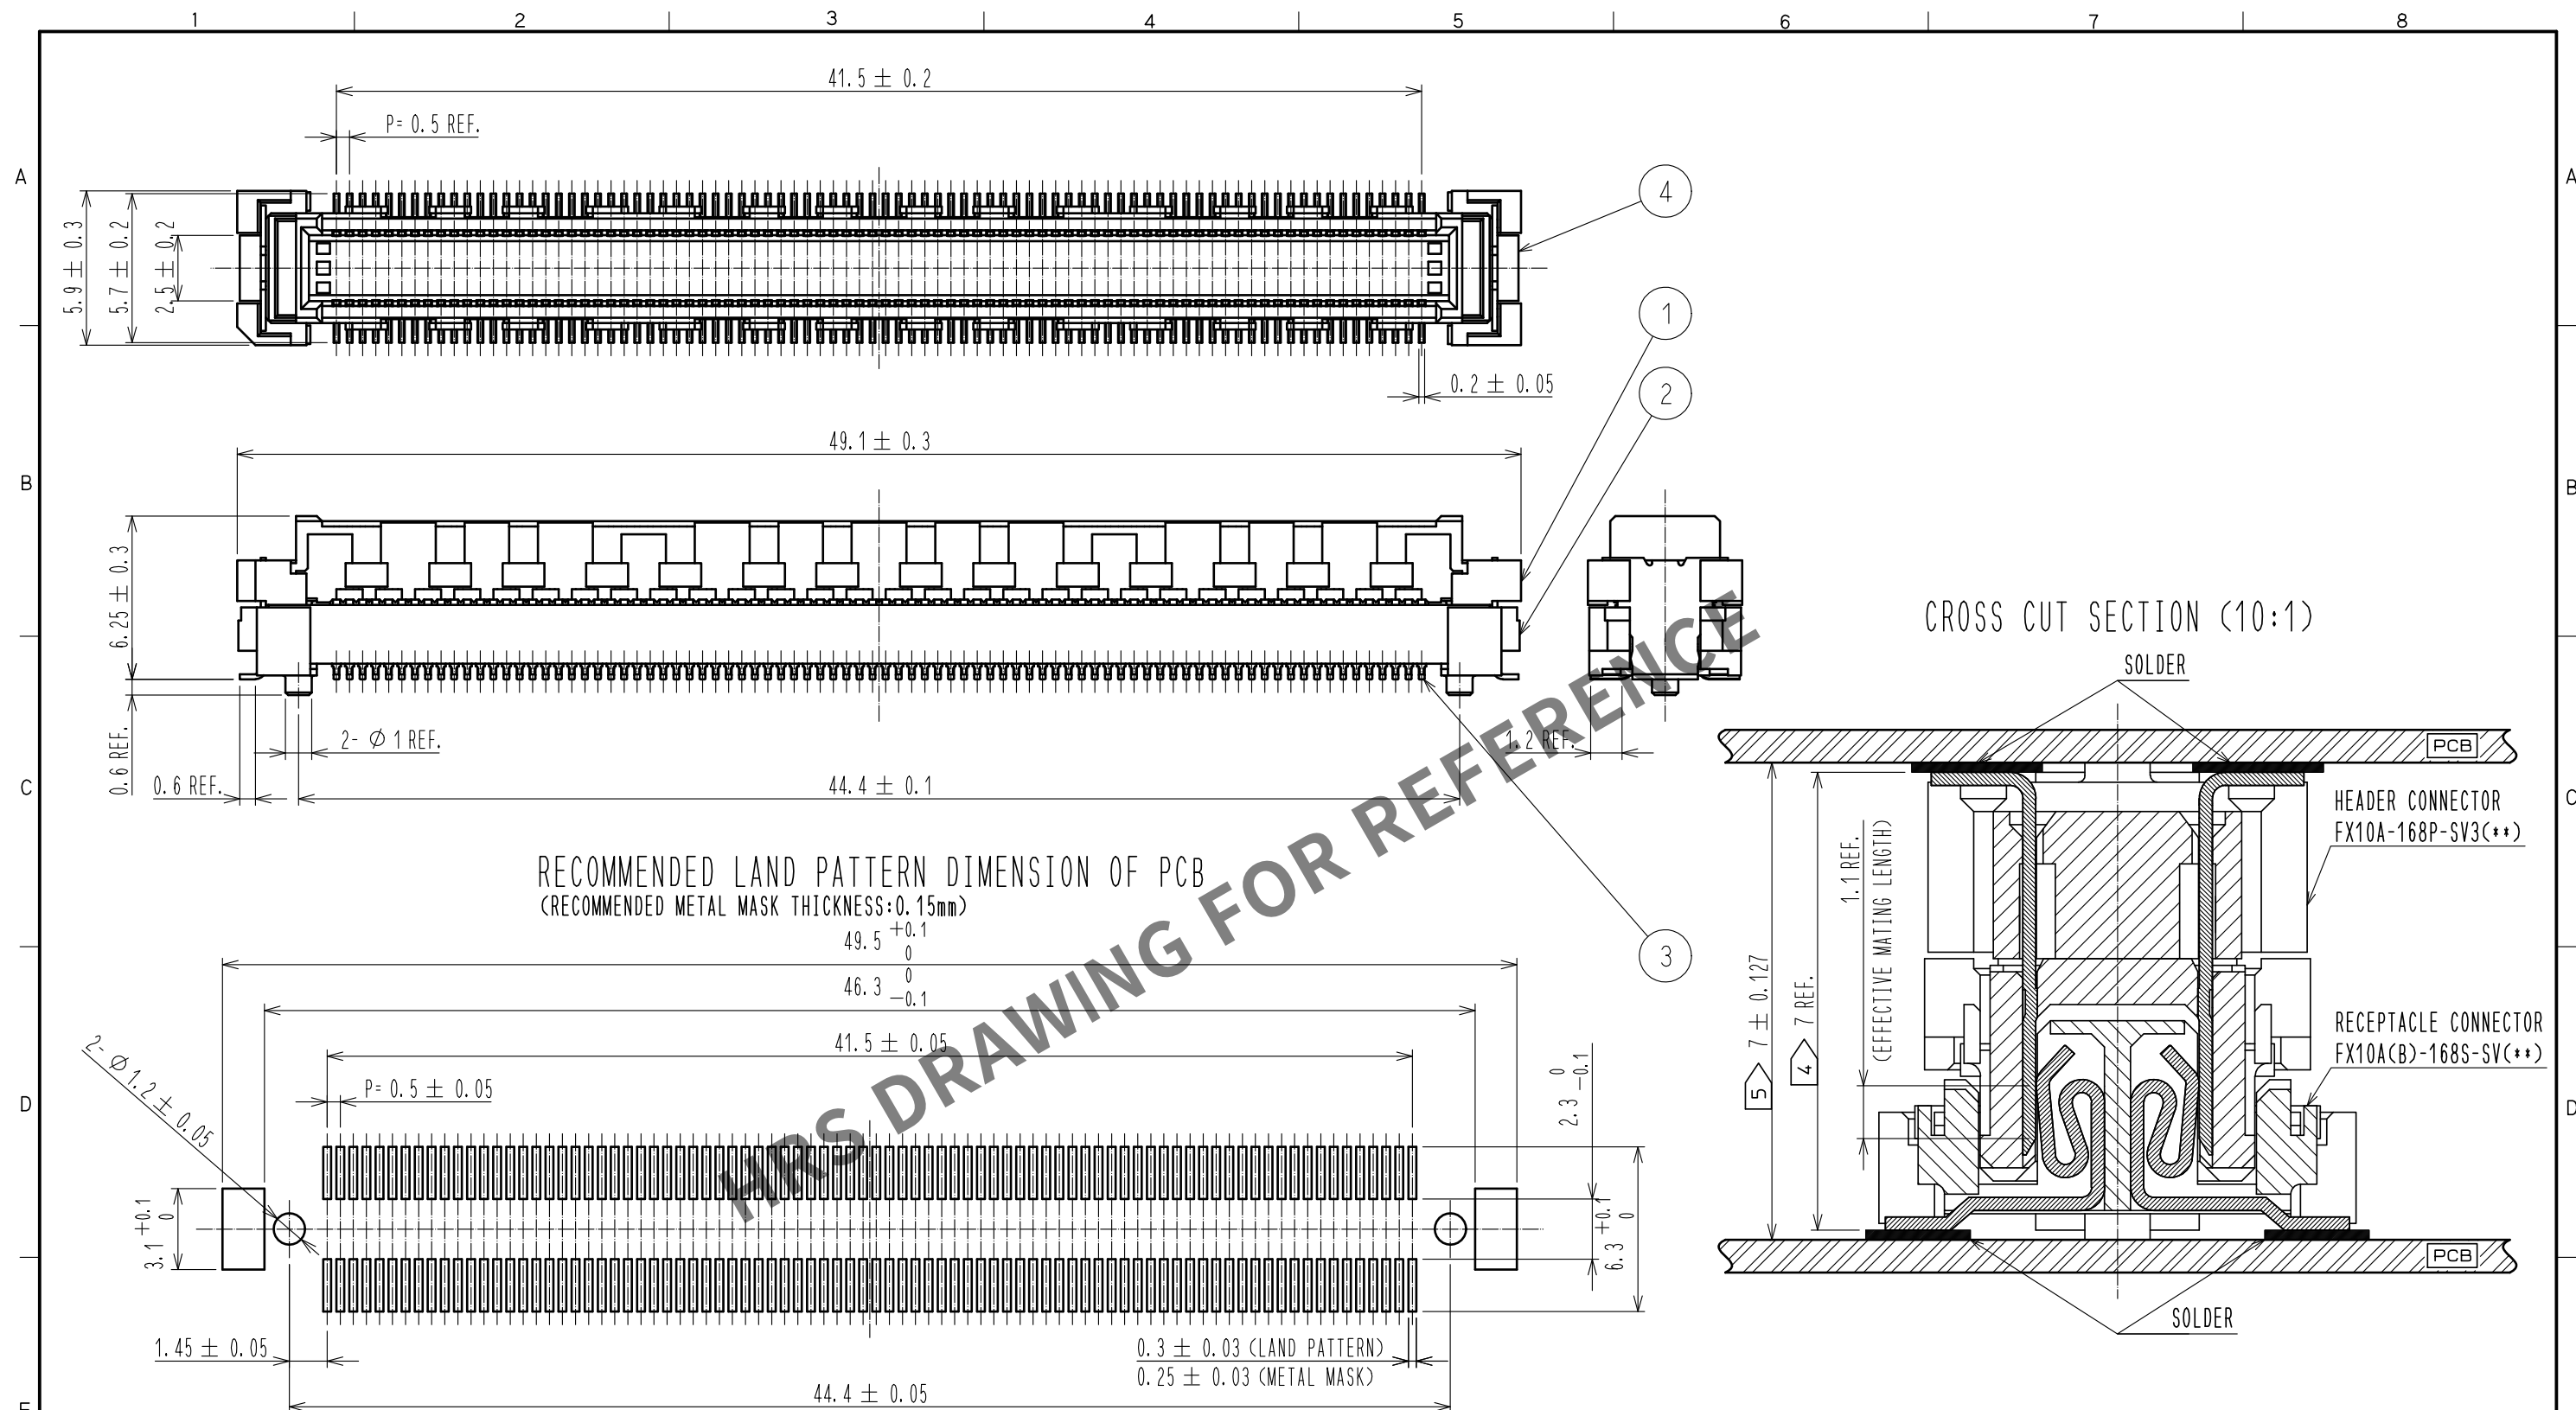

NOTE

1. SMT LEAD-COPLANARITY:0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. STACKING HEIGHT FROM LEAD TO LEAD.
4. BOARD DISTANCE

3	COPPER ARROY	CONTACT: GOLD PLATING 0.76μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER :NICKEL PLATING 1.3μm MIN	5	PS	TOP COVER TAPE
2	LCP	BEIGE, UL94V-0	5	PS	EMBOSSED CARRIER TAPE
1	LCP	BEIGE, UL94V-0	4	COPPER ARROY	LEAD : GOLD PLATING 0.03μm MIN UNDER :NICKEL PLATING 1.3μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 4:1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE



 HIROSE ELECTRIC CO., LTD.	APPROVED :NH. NAKATA	16. 11. 10	DRAWING NO.	EDC-330881-85-00
	CHECKED :HT. YAMAGUCHI	16. 11. 10	PART NO.	FX10A-168P-SV3(85)
	DESIGNED :MT. ITANO	16. 11. 10	CODE NO.	CL570-0304-7-85
	DRAWN :MT. ITANO	16. 11. 10		





Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT

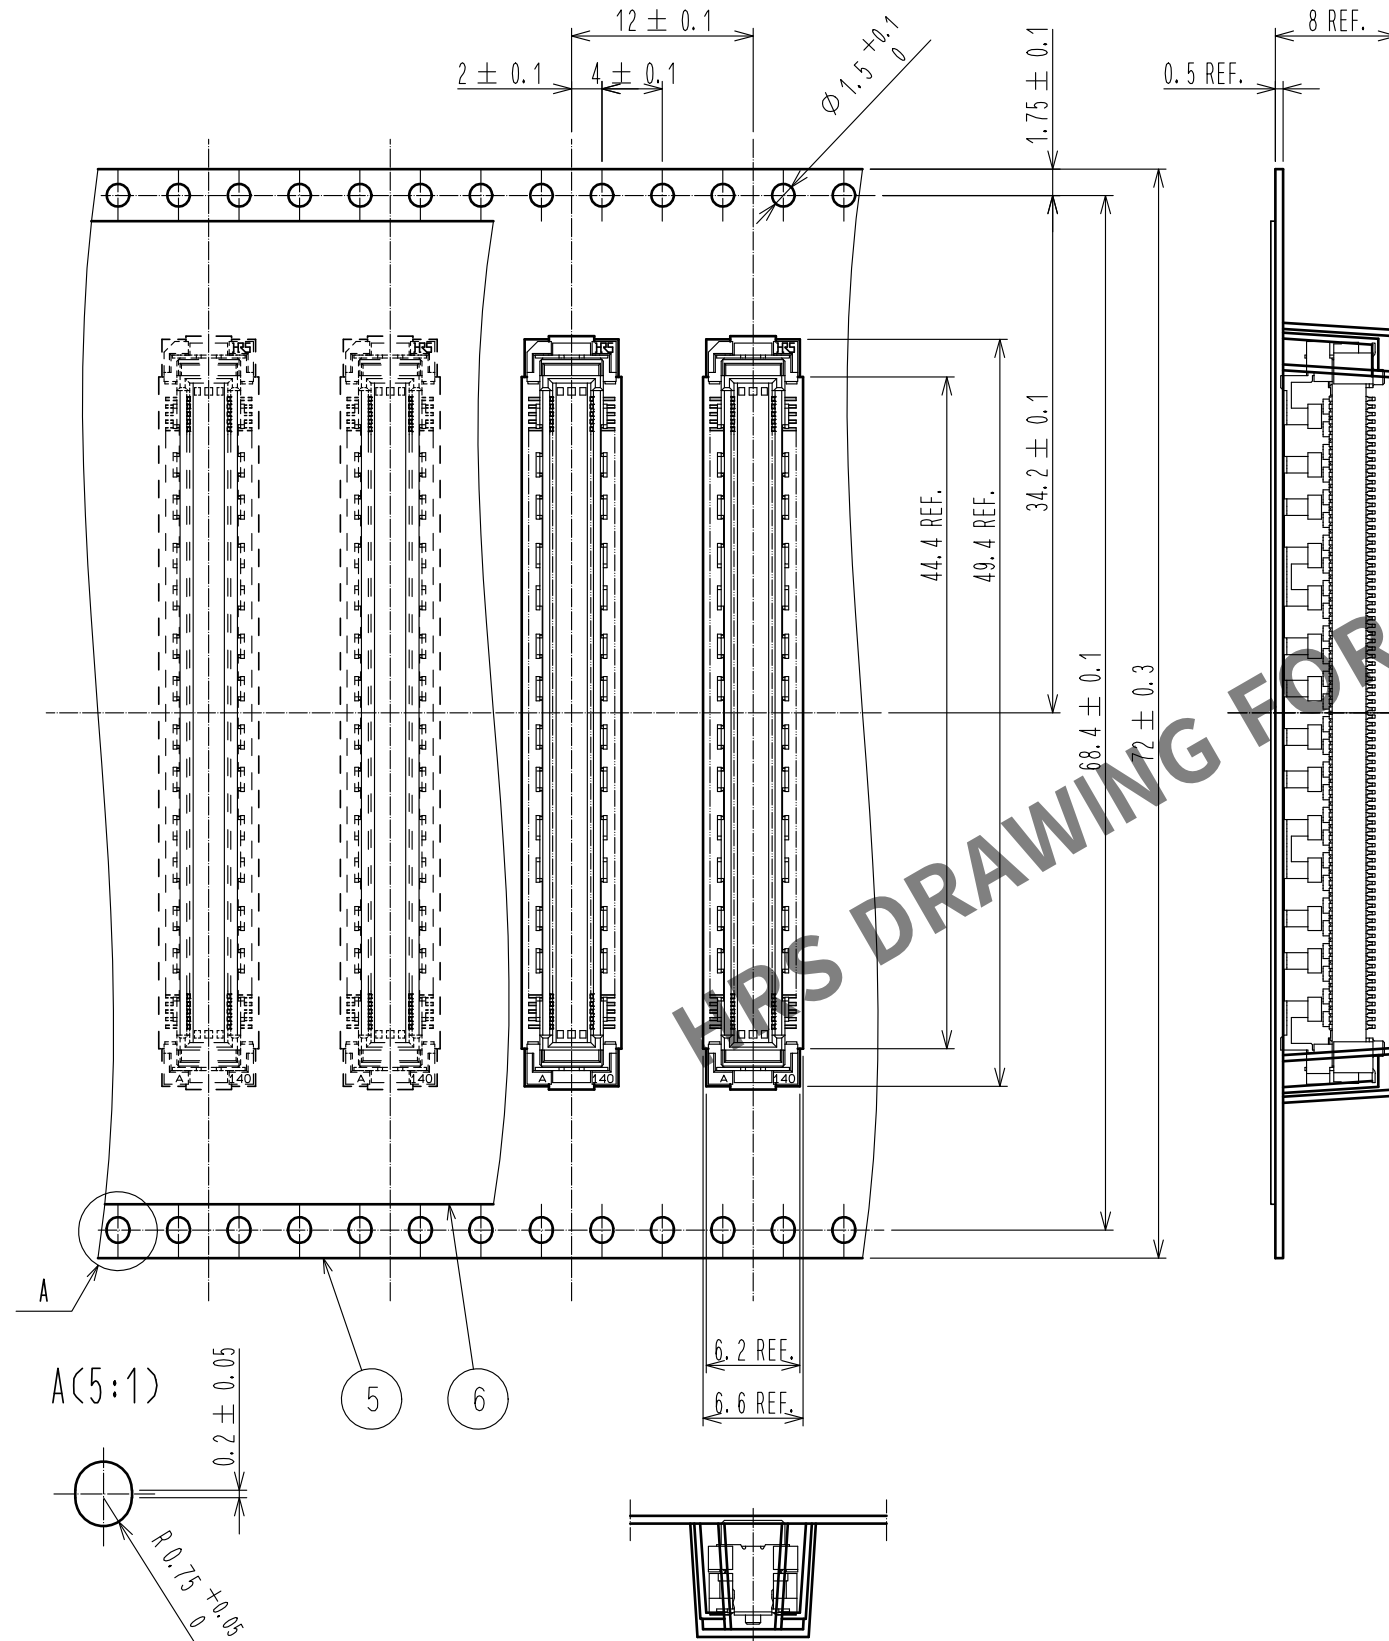

REELED DIMENSION (FREE)

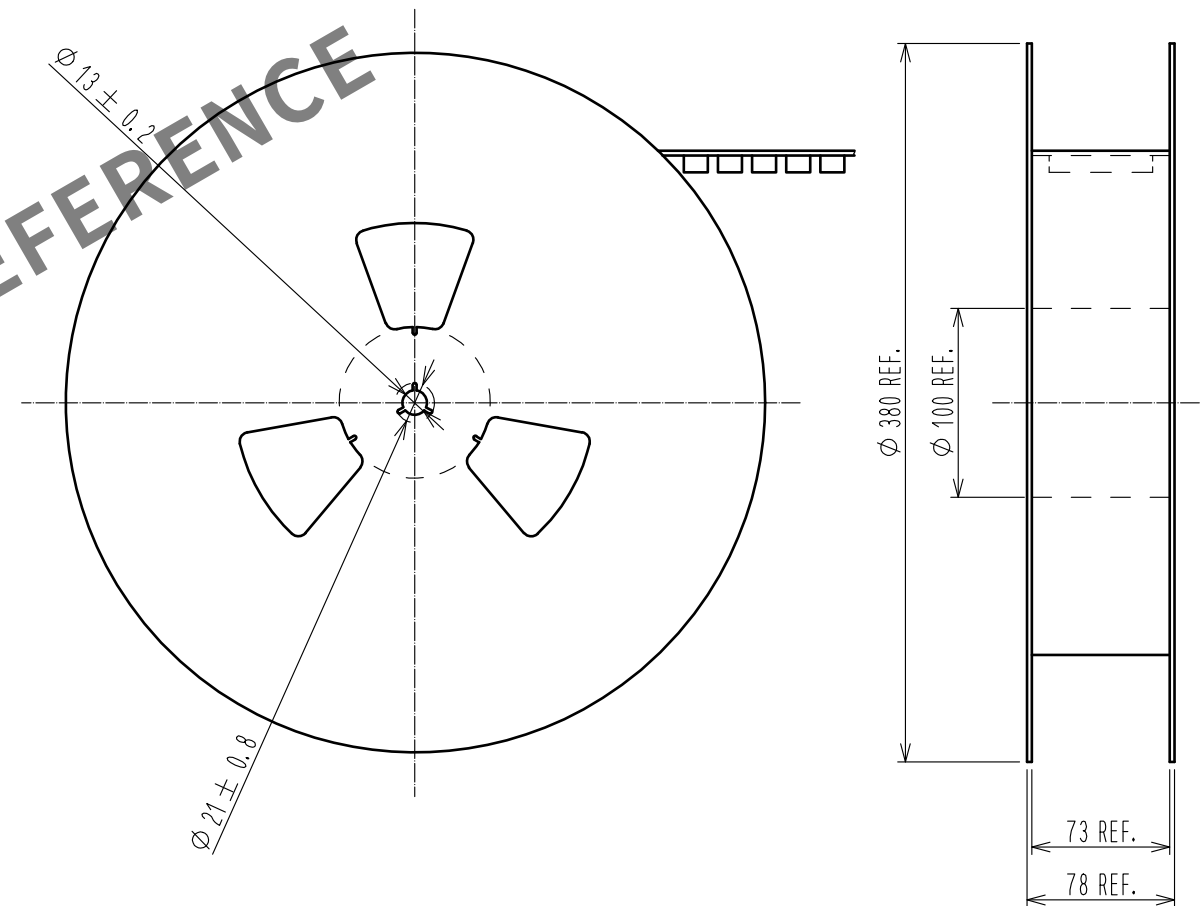

- NOTE
- 5. 1REEL:250 CONNECTORS.
 - 6. MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 7. THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.