



## Heyco® Snap-In Universal Strain Relief Bushings

Fit 1/2" Electrical Knock-out Hole

- USR 400 fits the widest range of cable sizes.
- USR 401 fits the widest range of Romex® and other flat cable sizes.
- Captive screw forces the locking flap against the cable.
- Captive screw meets typical European requirements wherein the Strain Relief device must remain attached to the panel during cable removal or replacement.
- Nylon USR 400 & 401 comply with:
  - IEC Publication #335
  - CEE #10 and # 11
- Easy installation: fingertip pressure locks bushing into .875" (22,2 mm) diameter holes with panel thickness up to .125" (3,2 mm).
- Reinforcing ribs for extra strength.
- Bell mouth contour, radiused at 1.5x the exit hole diameter, eliminates the need for a separate cord guard.
- Protect cables against forces of pull, push, twist, and flex.
- For Heyco-Tite Liquid Tight Romex® Connectors, see page 3-16.
- For Double D Mounting Hole Punches, see page 4-30.

WILL FIT THESE CABLES			PANEL DIMENSIONS						PART NO.	DESCRIPTION	SCREW TYPE
Cross Section	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Panel Thickness		Black		
	in.	mm.	in.	mm.	in.	mm.	in.	mm.			
Round or Flat	up to .360	up to 9,1	.875	22,2	.770	19,6	.062	1,6	1724	USR-400	nylon
							.125	3,2	1730	USR-40	steel

Standard color black. Consult Heyco for white and other colors.


## Heyco® Snap-In Romex® Strain Relief Bushing\*

Fits 1/2" Electrical Knock-out Hole

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	SCREW TYPE
Romex Type	AWG/ Conds	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Panel Thickness		Black		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			
NM-B	14/2, 14/3, 12/2, 12/3, 10/2	up to .250 x .400	up to 6,4 x 10,2	.875	22,2	.770	19,6	.062 .125	1,6 3,2	1726	USR-401	nylon

Standard color black. Consult Heyco for white and other colors.

\*For Romex® and other flat cables.

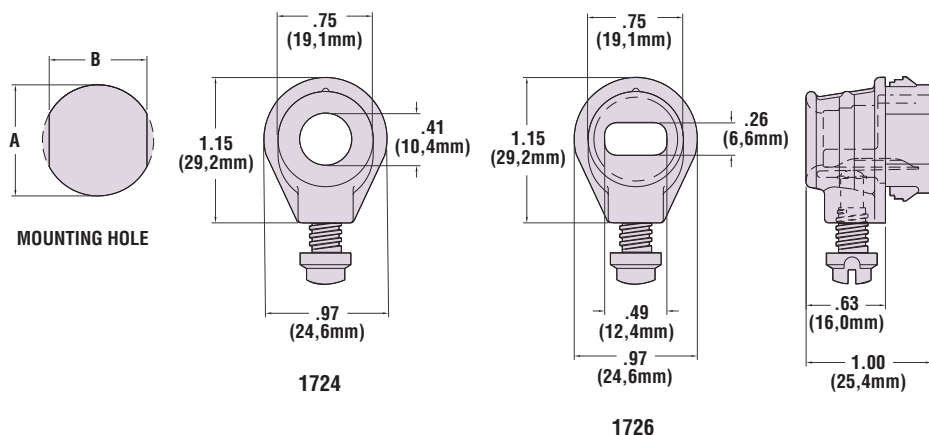

Quick  
Specs

Material  
Certifications

Nylon 6/6



Recognized File E15331 for round and flat SPT type cables



Listed under Underwriters' Laboratories File E103540



Certified by the Canadian Standards Association File 81067

Flammability Rating  
Temperature Range

94V-2

-.04°F (-18°C) to 221°F (105°C)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[1726](#) [1724](#) [1730](#)