

Precision SMD TCXO/VCTCXO

AST3TQ-28



ESD Sensitive



RoHS/RoHS II Compliant



7.0 x 5.0 x 1.9mm

Moisture Sensitivity Level (MSL) – 3

FEATURES:

- Standard available frequencies: 10.00, 12.80, 15.36, 16.32, 16.384, 19.20, 19.44, 20.00, 25.00, 26.00, 30.72 & 40.00 MHz
- Standard LVC MOS Output
- Frequency stability of ± 280 ppb (± 0.28 ppm) over -40°C to $+85^{\circ}\text{C}$
- Excellent Phase Noise, Harmonics & Spurious content
- Typical rms jitter of 400fs @ 40MHz carrier & 1.0ps @ 10MHz carrier over 12kHz to 20MHz BW

APPLICATIONS:

- COTS Military Radios & other Communication Hardware
- WiMax,
- LTE, BTS
- CATV, LAN, LMDS
- GPS Tracking with Hold-Over accuracy
- Test & Measurement Equipment
- Point-to-Point communication networks

STANDARD SPECIFICATIONS:

Parameters	Rating
Storage Temperature Range	-55 to $+125^{\circ}\text{C}$
Supply Voltage	-0.5 to 6V
ESD, HBM/CDM/MM	$4\text{kV}/2\text{kV}/200\text{V}$

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10		40	MHz	
Standard Frequencies:	10.00, 12.80, 15.36, 16.32, 16.384, 19.20, 19.44, 20.00, 25.00, 26.00, 30.72 and 40.00			MHz	
Initial Frequency Tolerance (@+25°C) at shipping			±0.3	ppm	Relative to carrier
Frequency Stability Options					
-40°C to +85°C			±280	ppb	
Frequency Stability vs. Supply Voltage Change (Vdd±5%):			±100	ppb	
Frequency Stability vs. Load Change (Load±5%):			±200	ppb	
Supply Voltage (Vdd):	+3.135	+3.3	+3.465	V	
Aging (first year @+25°C):			±1.0	ppm	
Aging (20 years @+25°C):		±3.0	±4.6	ppm	
Supply Current (Icc) (into 15pF load):		3.0	4.0	mA	@10MHz carrier
		5.5	7.0		@40MHz carrier
LVCMOS Output (Square wave)					
V _{OH} :	2.4			V	Load=15pF
V _{OL} :			0.4	V	Load=15pF
Load:			15	pF	
Duty Cycle:	45		55	%	@(V _{OH} - V _{OL})/2
Rise/Fall Time:			6	ns	Load=15pF
RMS Jitter (12kHz to 20MHz BW)	0.4		1.3	ps	Carrier dependent
Control Port					Applicable for VCTCXO only
Voltage Range (Vc)	0.50		+2.50	V	
Frequency Pull	±7.00	±10.00	±12.00	ppm	(Vc = 1.5V±1.0V)
Center Control Voltage (Vc)		+1.50			To be with-in ±500 ppb of Fc @ 25°C
Port Impedance	100			kΩ	
Phase Noise (10MHz carrier frequency @25°C):			-95	dBc/Hz	Offset @10Hz
			-120		Offset @100Hz
			-140		Offset @1kHz
			-145		Offset @10kHz
			-150		Offset @100kHz

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale


30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com




Revised: 09.18.14



OPTIONS & PART IDENTIFICATION: (left blank if standard)

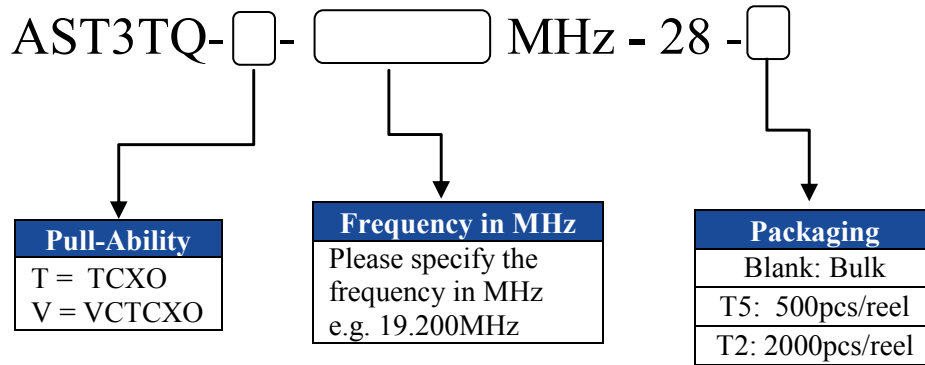


FREQUENCY STABILITY VS. TEMPERATURE

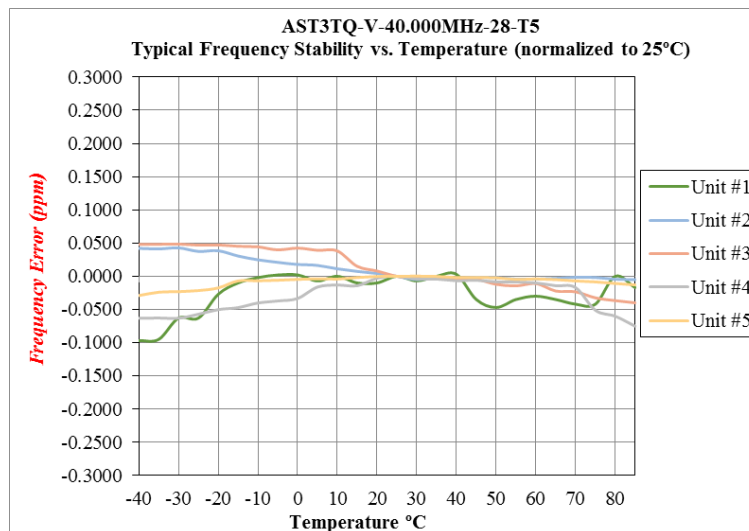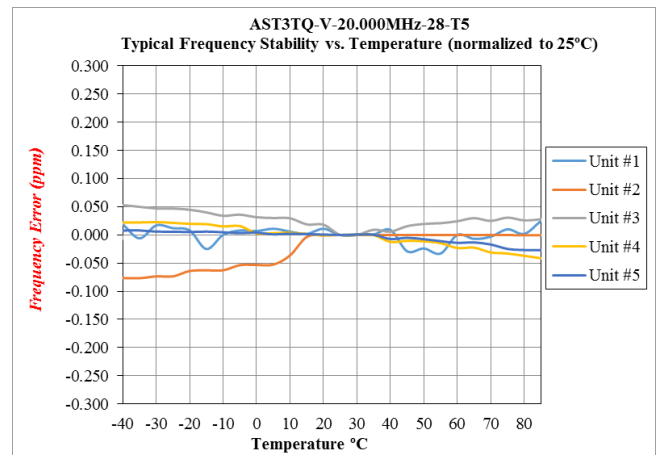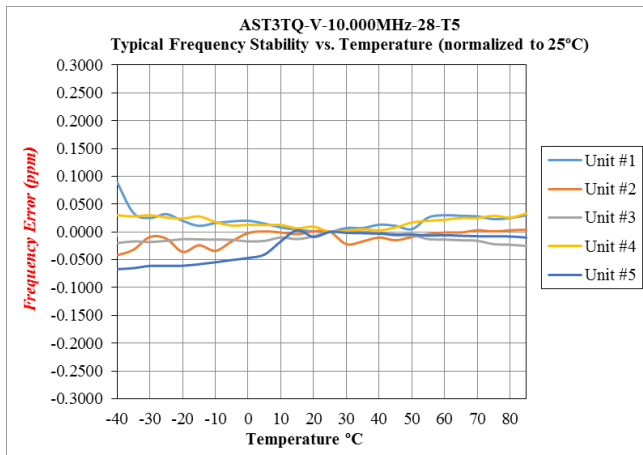




TYPICAL PHASE NOISE


10.00 MHz Carrier

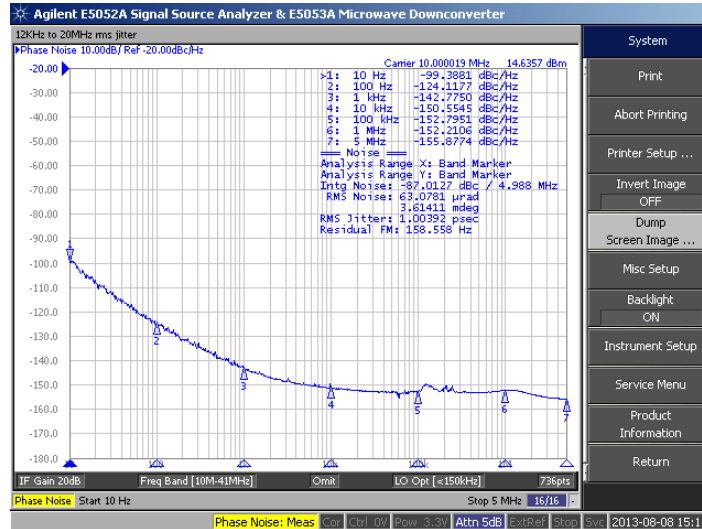

20.00 MHz Carrier

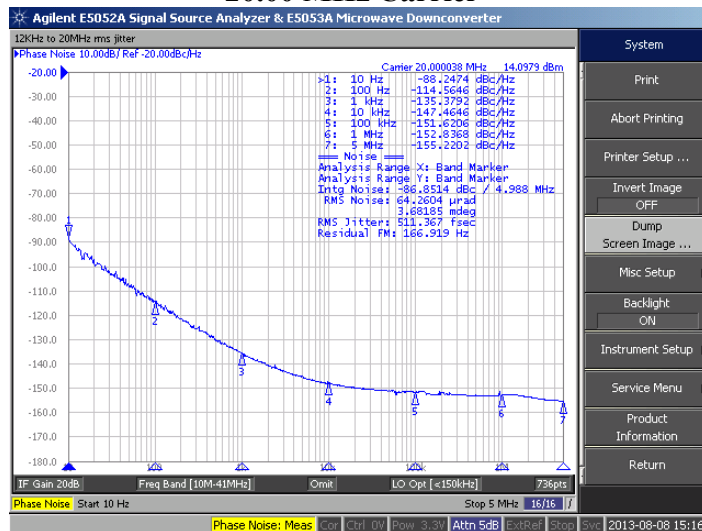


40.00 MHz Carrier

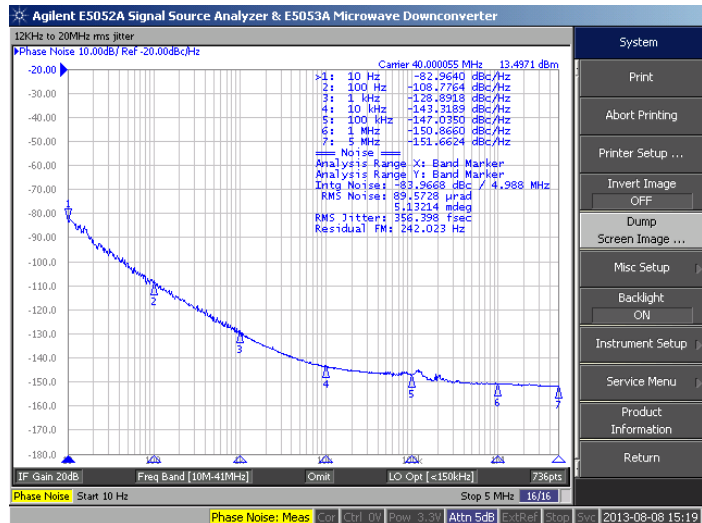




7.0 x 5.0 x 1.9mm

OUTLINE DIMENSION:

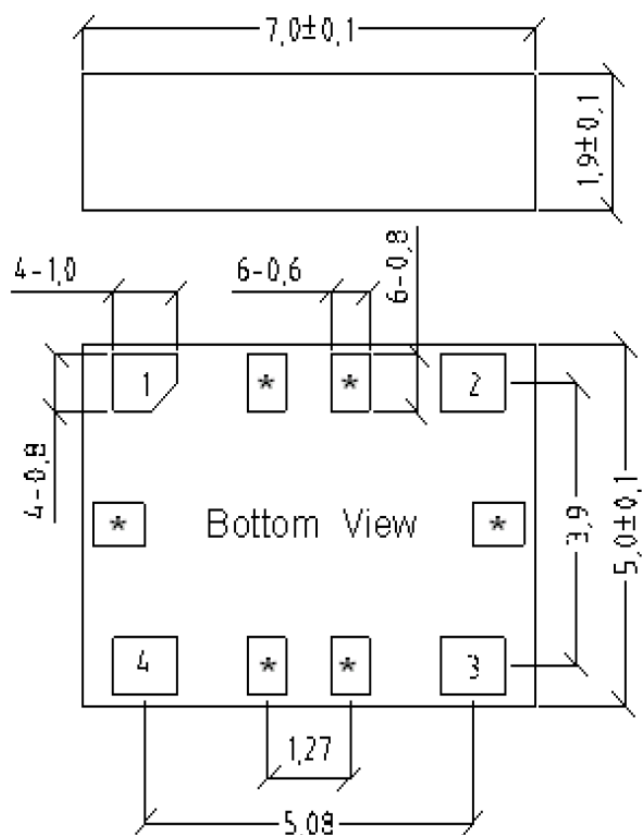


Recommended Land Pattern

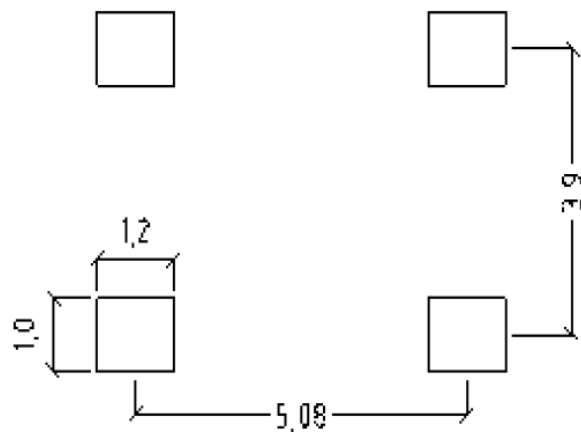

Pin	Function
1	NC (for TCXO) Vc (for VCTCXO)
2	GND
3	Output
4	Vdd
*	For factory test only

Dimensions: mm

REFLOW PROFILE:

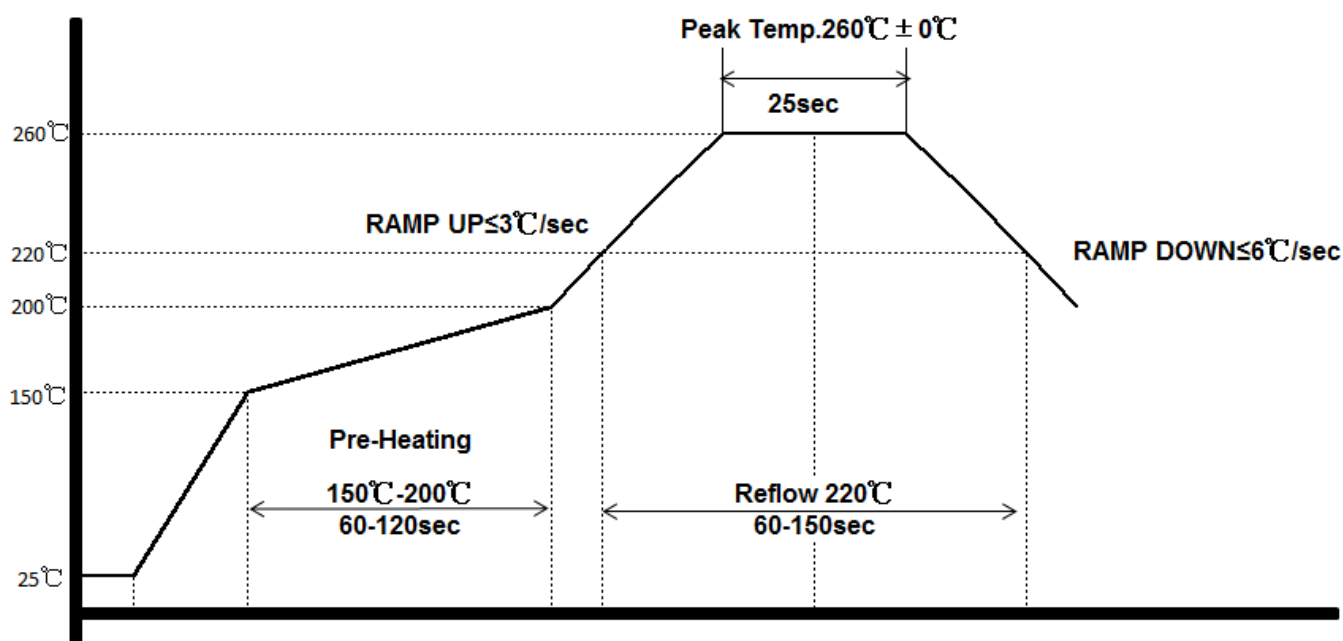



7.0 x 5.0 x 1.9mm


TAPE & REEL:

Packaging:


T5: 500pcs/reel

T2: 2,000pcs/reel

MSL-3 packaging applies to MOQ=50 units (cut tape) & T5 and T2.

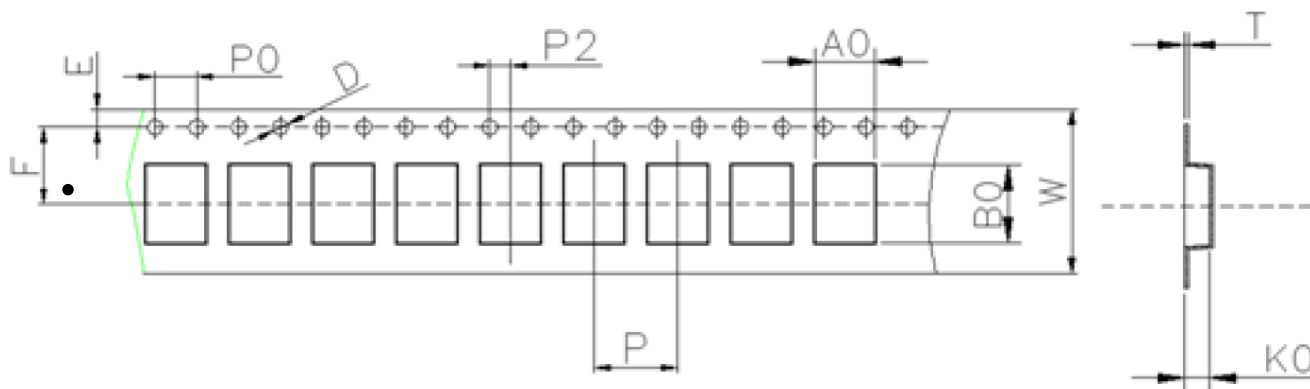

W	A0	B0	K0	P	F
16.0±0.3	5.7±0.15	7.6±0.15	2.4±0.15	8.0±0.1	7.5±0.1
E	D	P0	P2	T	
1.75±0.1	1.5+0.1/-0.0	4.0±0.1	2.0±0.1	0.3±0.05	

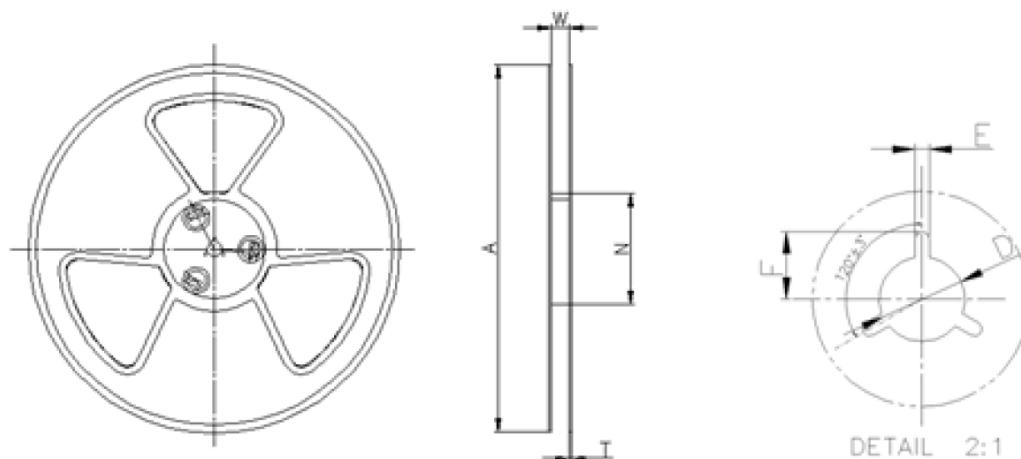

W	A	N	T	E	F	D
16.5±0.4	330±0.5	100±0.3	1.8±0.2	2.1±0.3	10.75±0.3	13.5+0.5/-0.2

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[AST3TQ-V-25.000MHz-28](#) [AST3TQ-V-40.000MHz-28](#) [AST3TQ-T-25.000MHz-28-T2](#) [AST3TQ-V-10.000MHz-28](#)
[AST3TQ-T-26.000MHz-28-T5](#) [AST3TQ-T-20.000MHz-28-T5](#) [AST3TQ-V-19.200MHz-28-T5](#) [AST3TQ-V-12.800MHz-28-](#)
[T2](#) [AST3TQ-T-40.000MHz-28-T5](#) [AST3TQ-T-12.800MHz-28](#) [AST3TQ-T-16.320MHz-28-T2](#) [AST3TQ-T-40.000MHz-](#)
[28-T2](#) [AST3TQ-T-16.384MHz-28-T5](#) [AST3TQ-T-20.000MHz-28](#) [AST3TQ-T-16.320MHz-28-T5](#) [AST3TQ-T-](#)
[16.384MHz-28-T2](#) [AST3TQ-T-26.000MHz-28-T2](#) [AST3TQ-T-12.800MHz-28-T5](#) [AST3TQ-V-16.384MHz-28](#) [AST3TQ-](#)
[T-25.000MHz-28-T5](#) [AST3TQ-V-19.440MHz-28](#) [AST3TQ-T-19.200MHz-28-T5](#) [AST3TQ-T-26.000MHz-28](#) [AST3TQ-V-](#)
[16.384MHz-28-T5](#) [AST3TQ-V-10.000MHz-28-T5](#) [AST3TQ-T-20.000MHz-28-T2](#) [AST3TQ-V-20.000MHz-28-T2](#)
[AST3TQ-V-16.320MHz-28-T5](#) [AST3TQ-V-15.360MHz-28](#) [AST3TQ-T-19.200MHz-28-T2](#) [AST3TQ-V-15.360MHz-28-T5](#)
[AST3TQ-T-30.720MHz-28-T2](#) [AST3TQ-T-16.320MHz-28](#) [AST3TQ-T-30.720MHz-28](#) [AST3TQ-T-19.200MHz-28](#)
[AST3TQ-T-40.000MHz-28](#) [AST3TQ-V-16.384MHz-28-T2](#) [AST3TQ-V-30.720MHz-28](#) [AST3TQ-V-19.200MHz-28](#)
[AST3TQ-V-19.200MHz-28-T2](#) [AST3TQ-V-30.720MHz-28-T2](#) [AST3TQ-T-19.440MHz-28-T2](#) [AST3TQ-T-16.384MHz-28](#)
[AST3TQ-V-20.000MHz-28-T5](#) [AST3TQ-T-15.360MHz-28-T2](#) [AST3TQ-V-40.000MHz-28-T2](#) [AST3TQ-T-10.000MHz-](#)
[28-T2](#) [AST3TQ-T-15.360MHz-28-T5](#) [AST3TQ-V-19.440MHz-28-T2](#) [AST3TQ-V-10.000MHz-28-T2](#) [AST3TQ-V-](#)
[40.000MHz-28-T5](#) [AST3TQ-V-20.000MHz-28](#) [AST3TQ-V-16.320MHz-28-T2](#) [AST3TQ-T-10.000MHz-28](#) [AST3TQ-T-](#)
[15.360MHz-28](#) [AST3TQ-T-30.720MHz-28-T5](#) [AST3TQ-V-30.720MHz-28-T5](#) [AST3TQ-T-19.440MHz-28](#) [AST3TQ-V-](#)
[16.320MHz-28](#) [AST3TQ-V-26.000MHz-28](#) [AST3TQ-V-25.000MHz-28-T2](#) [AST3TQ-V-26.000MHz-28-T2](#) [AST3TQ-V-](#)
[12.800MHz-28](#) [AST3TQ-T-12.800MHz-28-T2](#) [AST3TQ-V-26.000MHz-28-T5](#) [AST3TQ-V-12.800MHz-28-T5](#) [AST3TQ-](#)
[V-15.360MHz-28-T2](#) [AST3TQ-V-19.440MHz-28-T5](#) [AST3TQ-T-25.000MHz-28](#) [AST3TQ-T-10.000MHz-28-T5](#)
[AST3TQ-T-19.440MHz-28-T5](#) [AST3TQ-V-25.000MHz-28-T5](#)