
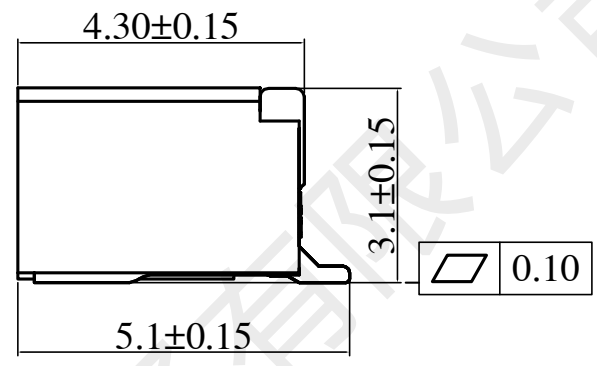


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		

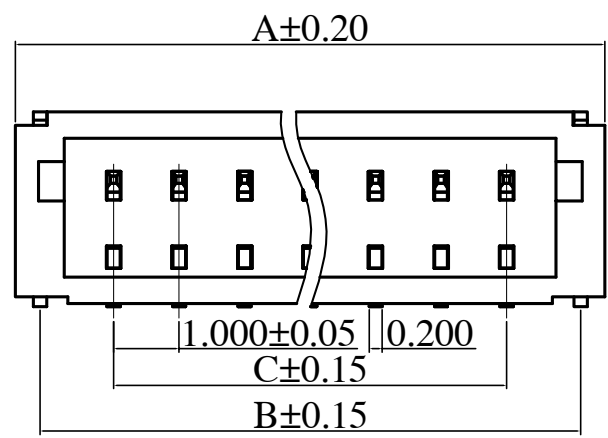

Specifications / 技术规格:

Current rating: 1A
额定电流: 1A

Voltage rating: 50V AC,DC
额定电压: 50V AC,DC

Insulation Resistance: 500MΩ Min.
绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC 1Min
耐电压: 500V AC 1分钟


Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: bronze(Sn plating)
接触端子材料: 磷铜(镀锡)

Insulation Material: LCP UL94 V-0
绝缘体塑胶材质: LCP UL94V-0

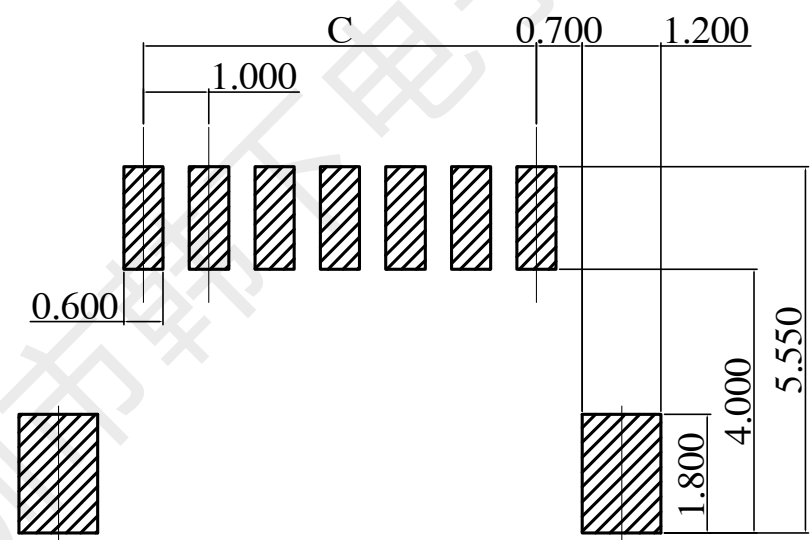

P 数	DIM=A	DIM=B	DIM=C
2	4.00	3.24	1.00
3	5.00	4.24	2.00
4	6.00	5.24	3.00
5	7.00	6.24	4.00
6	8.00	7.24	5.00
7	9.00	8.24	6.00
8	10.00	9.24	7.00
9	11.00	10.24	8.00
10	12.00	11.24	9.00
11	13.00	12.24	10.00
12	14.00	13.24	11.00
13	15.00	14.24	12.00
14	16.00	15.24	13.00
15	17.00	16.24	14.00
16	18.00	17.24	15.00

Recommended P.C.Board Layout

韩下 深圳市韩下电子有限公司

REV. A UNIT. MM SCALE. 1:1

GENERAL TOLERANCE		DESIGN:	黄彬	DATE:	2020. 8. 25	DWG. NO.	TITLE.
X° ± 3'	.XXX: ±0.10	CHECKED:	张伟	DATE:	2020. 8. 25	PART NO. HX SH1.0-6PWT	针座
X' ± 2'	.XX: ±0.15	AUDITED:		DATE:			
XX' ± 1'	.X: ±0.25	APPROVED:	罗小春	DATE:	2020. 8. 25		
XXX' ± 0.5'	X.: ±0.35						