

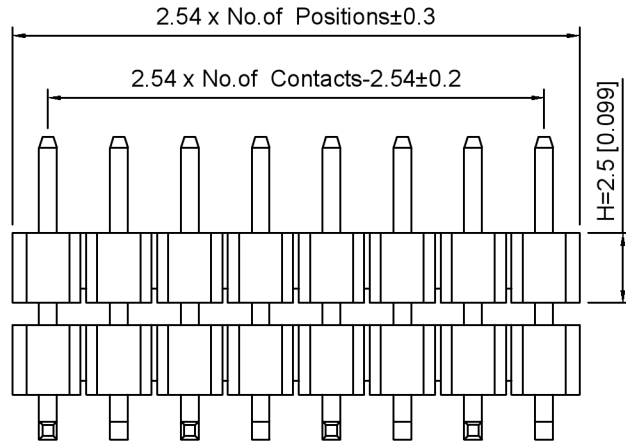
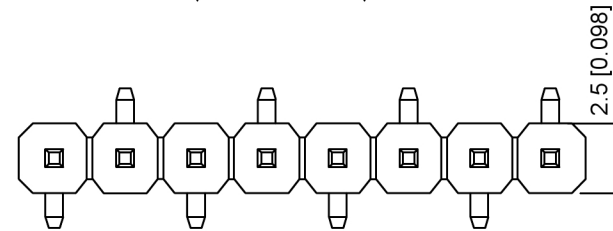
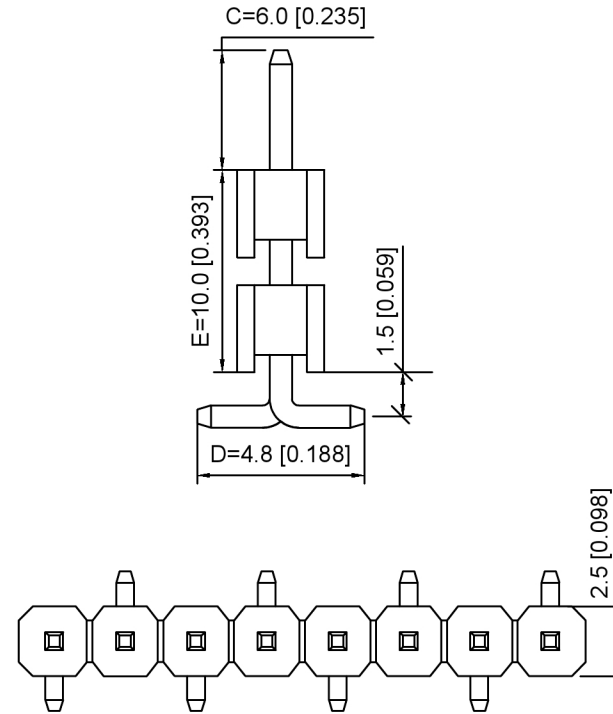


Type R1

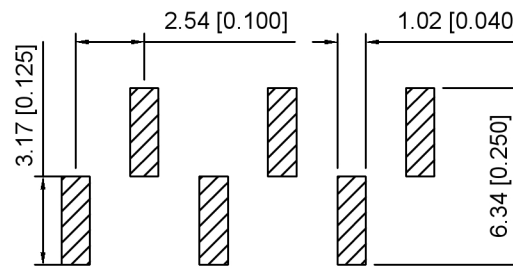

Type R2

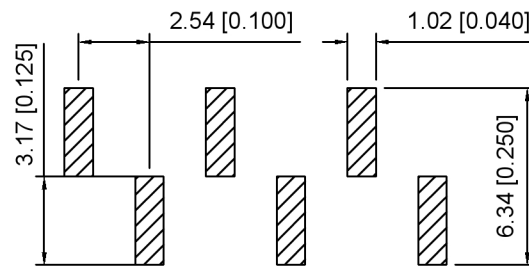

PCB LAYOUT

Specifications:

规格:

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range: -40°C~+105°C

温度范围: -40°C~+105°C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ

Material: PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category: 1U"Gold

镀层: 1U"Gold

Reflow soldering temperature: 260±5°C, 10S

回流焊温度: 260±5°C, 10S

X6512	W	V	S	-XX	H	-C60	D48	-E100	X
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

- 1.Series No.
- 2.Category:W-Water
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way: S-SMT
- 5.Row No -Pin No:XX-02P-40P
- 6.Plastic height: H=2.5mm
- 7.Pin length: C=6.0mm
- 8.Pin length:D=4.8mm
- 9.Pin length:E=10.0mm
- 10.Type:X-R1 ; R2

X6512WVS-XXH-C60D48-E100X	PA6T	Brass	1U"Gold	X6511F
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Female

广东星坤科技股份有限公司	
DATE	日期
ΔX	
ΔX	
ΔX	
MARK	文件工程章
DESCRIPTION	REVISIONS
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	2.54 BTB Connector
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	X6512WVS-XXH-C60D48-E100X
		DWG NO.:
		X-X6512WVS-XXH-C60D48-E100X
WEIGHT	SHEET	REVISION
	1/1	A0