


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	FAR0405	10.10.14	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT (TECHNICAL)	

EXPANDABLE FORKED WEBBING LANYARD (FAR0405)

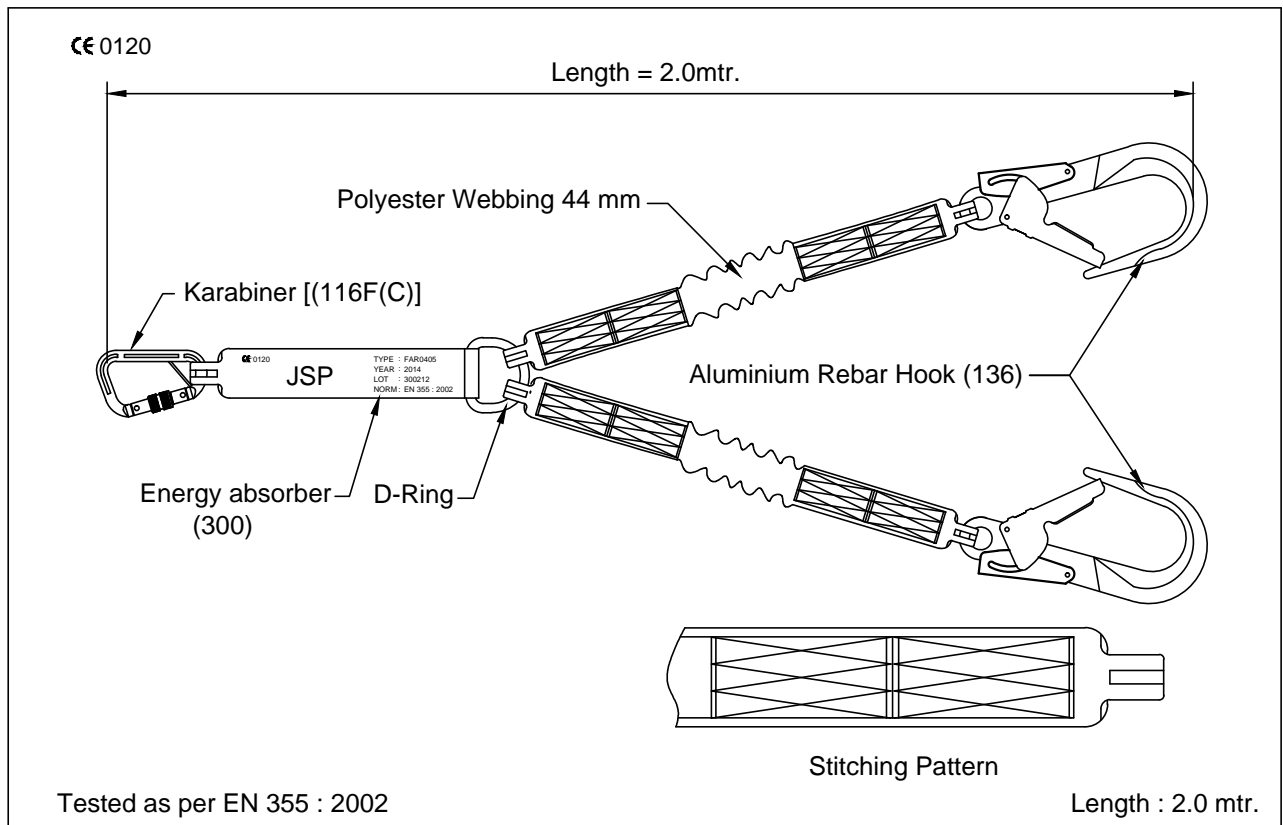

- | | |
|-----------------------|---|
| DESIGN | <ul style="list-style-type: none"> • 44 mm wide polyester tubular webbing with one side Energy Absorber and other side Aluminium Rebar Hook (136). • Energy absorber (300) incorporated. |
| WEBBING | <ul style="list-style-type: none"> • Material : Polyester. • Width : 44±1mm. • Breaking strength : 25 kN. |
| STITCHING THREAD | <ul style="list-style-type: none"> • Material : High-Tenacity Polyester. |
| VITAL TEST COMPLIANCE | <ul style="list-style-type: none"> • Static Strength : 15 kN for 3 Minutes. • Dynamic Strength : Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs. |
| WEIGHT | <ul style="list-style-type: none"> • 2.0 Meter (Expanded) : 350 gm ±10 gm. |
| LENGTH | <ul style="list-style-type: none"> • Expanded : 2.0 mtr. • Contracted : 1.4 mtr. |