




■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤40mΩ

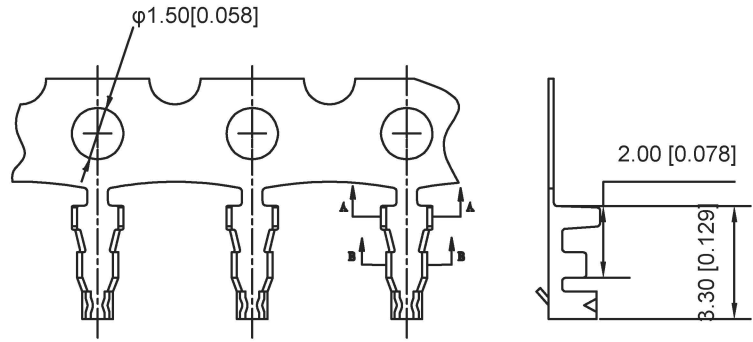

X9821TF-P-XX

- ① Series Number
- ② Category : T-terminal
- ③ Welding Board Angle : F-Fmale
- ④ Material:P-Phosphor bronze
- ⑤ Plating style:V01-Gold Flash;SN-Bright tin plating
SN2-Bright Tin Plating 120u"Min

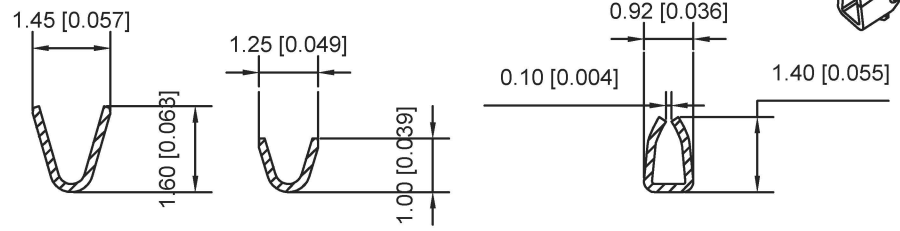

SECTION:A-A
SCALE:1:1

SECTION:B-B
SCALE:1:1

SECTION:C-C
SCALE:1:1

X9821TF-XX-SN2				Stamping Before Plating:50u" Min Ni;120u"Sn Min	
X9821TF-PV01	Phosphor Bronze	AWG#28-32	1.0mm(Max)	Stamping Before Plating:30u" Min Ni;Whole Gold Gold Flash	X9821HM-PSN
X9821TF-PSN				Stamping Before Plating:30u" Min Ni;70u"Sn Min	
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable X K B

广东星坤科技股份有限公司

生效	ΔX	日期
	ΔX	
	ΔX	
MARK	DESCRIPTION	DATE

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X9821TF-PXX
DWN	DATE	VIEW:	PART NO.: 1.25mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn