

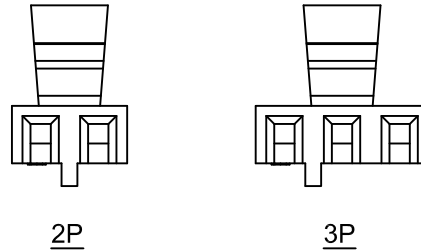
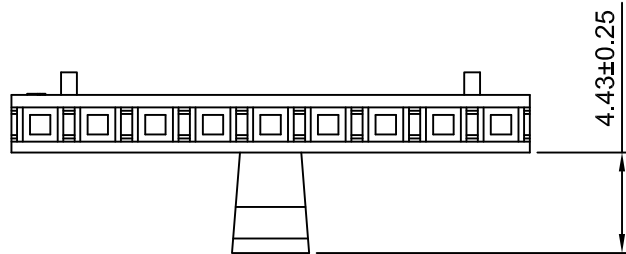
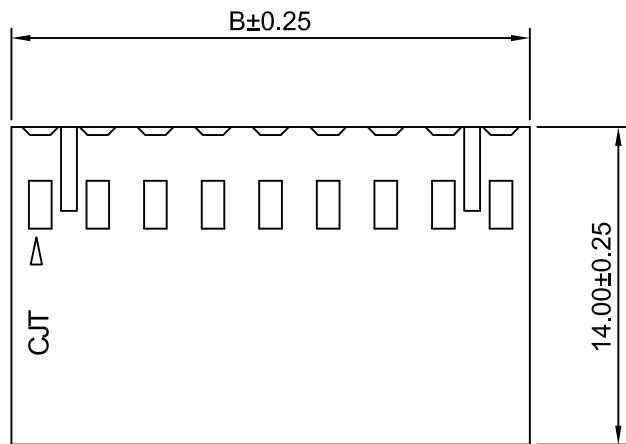
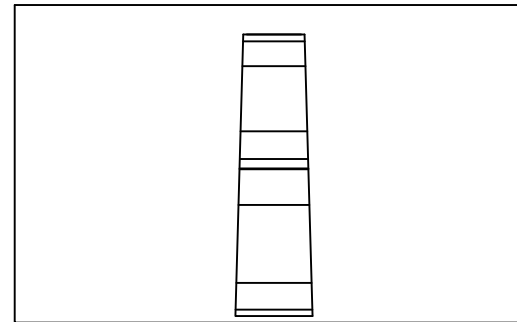


4P~25P

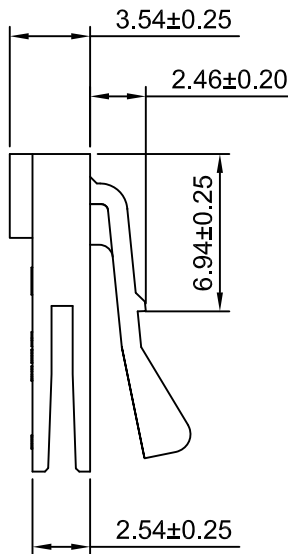

2P

3P



**SPECIFICATIONS:**

Current Rating: 3A AC,DC  
 Voltage Rating: 300V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 5mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1100V AC/minute  
 Material: PBT+30%GF,UL94V-0(Black)

**Ordering Information & Dimensions**

Part NO.	Dimensions(mm)	
	A	B
A2550H-2P-A1	2.54	5.08
A2550H-3P-A1	5.08	7.62
A2550H-4P-A1	7.62	10.16
A2550H-5P-A1	10.16	12.70
A2550H-6P-A1	12.70	15.24
A2550H-7P-A1	15.24	17.78
A2550H-8P-A1	17.78	20.32
A2550H-9P-A1	20.32	22.86
A2550H-10P-A1	22.86	25.40
A2550H-11P-A1	25.40	27.94
A2550H-12P-A1	27.94	30.48
A2550H-13P-A1	30.48	33.02
A2550H-14P-A1	33.02	35.56
A2550H-15P-A1	35.56	38.10
A2550H-16P-A1	38.10	40.64
A2550H-17P-A1	40.64	43.18
A2550H-18P-A1	43.18	45.72
A2550H-19P-A1	45.72	48.26
A2550H-20P-A1	48.26	50.80
A2550H-21P-A1	50.80	53.34
A2550H-22P-A1	53.34	55.88
A2550H-23P-A1	55.88	58.42
A2550H-24P-A1	58.42	60.96
A2550H-25P-A1	60.96	63.50

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.54mm PITCH CRIMP FLEX HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
A2	CHANGE THE SIZE	2021.01.20		A2550H-XP-A1
A1	CHANGE THE DRAWING OF 3P	2019.09.03		
A0	NEW RELEASE	2005.07.01		
REV	DESCRIPTION	DATE		

REV A2