



**Part Number :** [394260004](#)


**Product Description :** 12.00mm Pitch Beau EuroMax Right-Angle PCB Header, Closed Ends, 4 Circuits, with Threaded Retention Inserts

**Series Number :** 39426

**Status :** New Business Not Supported

**Product Category :** Terminal Blocks and Barrier Strip

**Engineering Number :** 425904

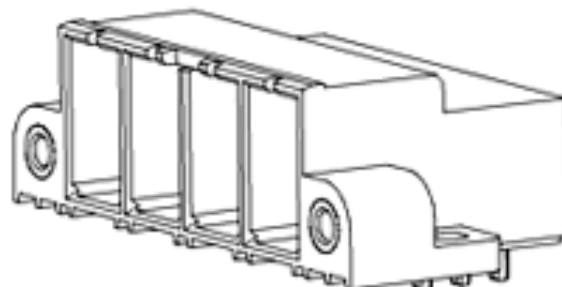


---

## Documents & Resources

---

### Product Environment Compliance

#### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2020)9139-DC (19 Jan 2021)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

#### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	New Business Not Supported
Category	Terminal Blocks and Barrier Strip
Series	39426
Description	12.00mm Pitch Beau EuroMax Right-Angle PCB Header, Closed Ends, 4 Circuits, with Threaded Retention Inserts
Application	Wire-to-Board
Component Type	PCB Header
Product Family	Terminal Blocks & Barrier Strips
Product Name	EuroMax Pluggable
Type	PCB Terminal Blocks and Connectors
UPC	822348755660

### Electrical

Current - Maximum per Contact	85.0A
Voltage - Maximum	600V

### Physical

Circuits (Loaded)	4
Entry Angle	N/A
Lock to Mating Part	Yes
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	1.000/g
Number of Rows	1
Orientation	Right Angle
Panel Mount	No
PC Tail Length	4.30mm
PCB Retention	Yes
PCB Thickness - Recommended	3.20mm
Pitch - Mating Interface	12.00mm
Pitch - Termination Interface	12.00mm

Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	Yes
Shrouded	Closed Ends
Stackable	No
Temperature Range - Operating	130°C
Termination Interface Style	Through Hole
Wire Size (AWG)	N/A