






HI1206T500R-10


**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	3.20 [.126]	+0.20 [.008]
B	1.60 [.063]	+0.20 [.008]
C	1.10 [.043]	+0.20 [.008]
D	0.51 [.020]	+0.25 [.010]

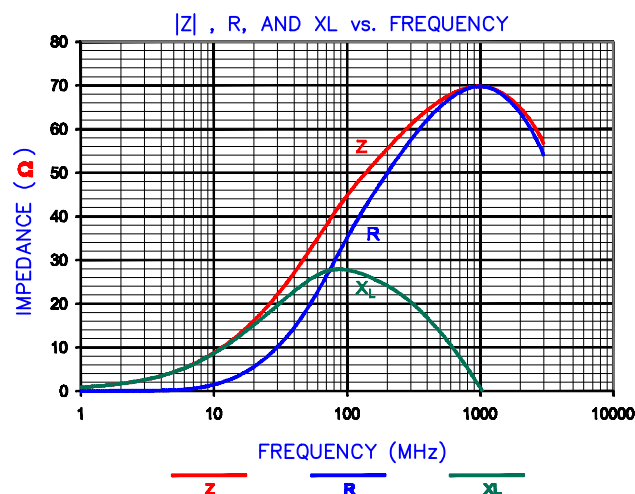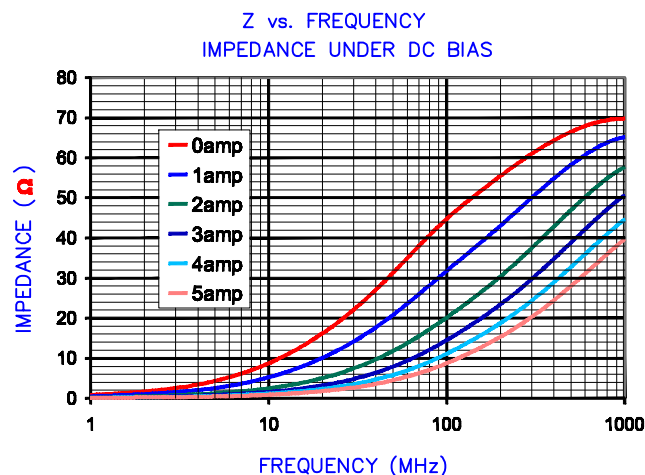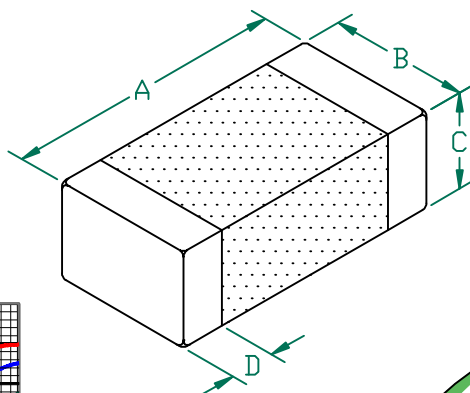

LAND PATTERNS FOR REFLOW SOLDERING

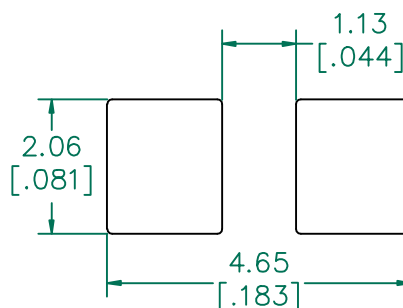

(For wave soldering, add 0.762
[.030] to this dimension)


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	50	
Minimum	38	
Maximum	63	0.010 6000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.

RECOMMENDED SOLDERING CONDITIONS

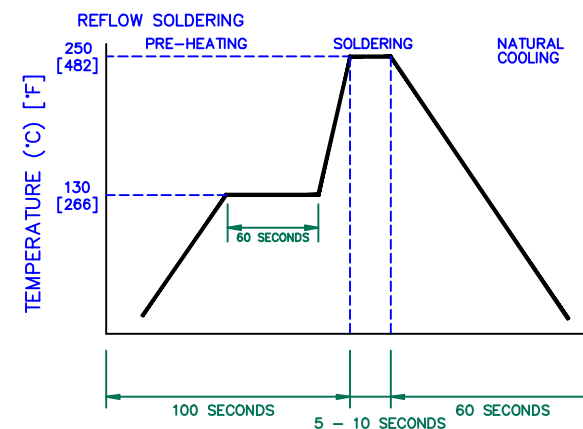

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				Laird TECHNOLOGIES			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				HI1206T500R-10	C	CO-FIRE	JRK
C	UPDATE COMPANY LOGO & ROHS SYM.	01/17/08	JRK	DATE:	03/02/04	SCALE:	NTS
B	ADD ROHS SYMBOL AND NOTE 3	10/01/04	JRK	CAD #	HI1206T500R-10-C	TOOL #	-
A	ORIGINAL DRAFT	03/02/04	JRK				
REV	DESCRIPTION	DATE	INT				