

## Data sheet

### E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

Page 1/9

P/N

130922-03-E

EAN 4250184106197


2023/05/09

Version: AG

## Illustrations



Dimensional drawing

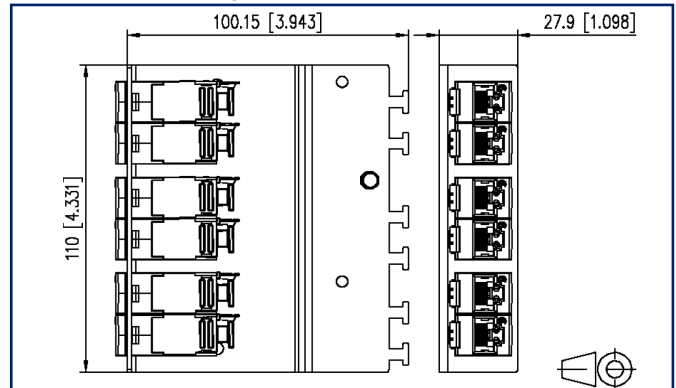

See enlarged drawings at the end of document

## Product specification

- module frame with 6 E-DAT modul modules
- Cat.6<sub>A</sub> component test according to ISO/IEC 11801, DIN EN 50173-1, ANSI/TIA-568.2-D and IEC 60603-7-51
- compliance with class E<sub>A</sub> according to ISO/IEC 11801, DIN EN 50173-1
- tested: Link up to 500 MHz
- suitable for 10 GBit Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus, UPoE and 4PPoE) and HDBaseT
- easy to install connection of 2 to 4 pair data lines AWG 26/1 - 22/1 and stranded wires with 7 copper conductors AWG 26/7 - 22/7 to BTR 8-fold insulation displacement connectors (IDC)
- marking of conductor assignment to T568A and T568B
- 1RU module frame for mounting in surface-mounted housing, top hat rail adapter or 1RU module frame
- optional strain relief using cable ties
- grounding bolt M6 x 10 with nut and lock washer

# P | Cabling

Data sheet

Page 2/9

## E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

### Technical Data

#### General Data

Fields of application	structured building cabling Consolidation points office areas Distributed building services data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	patch panel
Mounting style	1RU
Shielding	shielded
Transmission technology	Copper
Wiring	T568A and T568B
Color	stainless steel
Dimensions	
Dimension (L x W x H)	110.15 mm x 110 mm x 27.9 mm
Dimension (L x W x H)	4.337 in. x 4.331 in. x 1.098 in.
Height unit	for 1RU
Modularity	yes

#### Transmission characteristics

Category (ISO)	6 <sub>A</sub>
Class (ISO/IEC)	E <sub>A</sub>
Category (TIA)	6A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
HDBaseT	yes
Transmission rate up to 100 MBit (Fast Ethernet)	IEEE 802.3bw
Transmission rate up to 1 GBit (Fast Ethernet)	IEEE 902.3ab
Transmission rate up to 10 GBit	IEEE 802.3an

### Technical Data

Connections/interfaces	
Connector technology interface 1	IDC-connection
Connector technology interface 2	RJ45-jack
Number of ports interface 2	6
Number of ports interface 2 equipped	6
Number of positions/contacts interface 1	6 x 8
Number of positions/contacts interface 2	6 x 8P/8C
Termination data, solid wire (min. - max.)	
Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm <sup>2</sup> - 0.324 mm <sup>2</sup>
Conductor diameter, solid wire (bare copper)	0.409 mm - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 in. - 0.025 in.
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7 - AWG 22/7
Conductor cross section, stranded wire	0.141 mm <sup>2</sup> - 0.355 mm <sup>2</sup>
Conductor diameter, stranded wire (bare copper)	0.483 mm - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 in. - 0.03 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	5.5 mm - 10
Cable sheath diameter	0.197 in. - 0.394
Cable access/outlet	180°
Ground connection	grounding bolt M6x10 with nut and lock washer
Shield connection	flexible contact spring

Electrical characteristics	
Current carrying capacity	max. 1 A at 60 °C
Rated voltage	max. 60 V DC
Contact resistance	max. 20 mOhm
Through resistance	max. 200 mOhm
Insulation resistance	min. 500 MOhm
Dielectric strength conductor-conductor (secondary)	max. 1000 V DC
Dielectric strength conductor-conductor, peak value (secondary)	max. 1.000 V AC
Dielectric strength conductor-shield	max. 1500 V DC

# P | Cabling

Data sheet

Page 4/9

## E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

### Technical Data

#### Electrical characteristics

Dielectric strength conductor-shield, peak value      max. 1500 V AC

#### Mechanical data

Cut-out      module

Insertion and withdrawal force      max. 30 N

Life - Number of mating cycles      min. 750

Position/mounting of latch  
standard installation position      top

strain relief      cable tie

#### Materials and material properties

Material - Jack housing      GD-Zn (zinc die-cast)

Material - Jack contact      Spring steel

Material - Jack contact finish      Ni + Au (nickel-gold)

Material - Terminal block contact      CuSn (tin bronze)

Material - Terminal block contact finish      Sn (tin)

Material - Jack shield      GD-Zn (zinc die-cast)

Material - Stuffer cap      GD-Zn (zinc die-cast)

Material - Strain relief      stainless steel

Material - Front cover      stainless steel

Material - Module support      stainless steel

Halogen free      yes

RoHS      compliant

#### Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C      -40 °C - 70 °C

Temperature - Storage °F      -40 °F - 158 °F

Temperature - Operating °C      -40 °C - 70 °C

Temperature - Operating °F      -40 °F - 158 °F

# P | Cabling

Data sheet

Page 5/9

## E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

### Technical Data

#### Certifications

GHMT Type Approval



Component

#### Approvals

UL listed (file no.)



DUXR.E178484

#### Standards/Regulations

Generic cabling systems

General requirements

ISO/IEC 11801-1:2017-11 | DIN EN 50173-1:2018-10  
ANSI/TIA-568.2-D

Office buildings

ISO/IEC 11801-2:2017-11 | DIN EN 50173-2:2018-10  
ANSI/TIA-568.2-D

Living units

ISO/IEC 11801-4:2017-11 | DIN EN 50173-4:2018-10  
ANSI/TIA-570-D

Data centers

ISO/IEC 11801-5:2017-11 | DIN EN 50173-5:2018-10  
ANSI/TIA-942-B

Connectors for electronic equipment

Free and fixed connectors

DIN EN 60603-7-51:2011-01, DIN EN 60603-7:2019-11, DIN EN  
60603-7-1:2012-01

Connectors for electronic equipment - Tests and measurements

Test standard for connectors (engaging and  
separating connectors under electrical load)

DIN-EN 60512-99-001, DIN-EN 60512-99-002

Endurance tests

DIN EN 60603-7:2019-11, DIN EN 60603-7-1:2012-01

Degrees of Protection Provided by Enclosures

IEC 60529

Climate tests

DIN EN 60603-7:2019-11, DIN EN 60603-7-1:2012-01

#### Classifications

ETIM 5.0

EC001128

ETIM 6.0

EC001128

ETIM 7.0

EC001128

ETIM 8.0

EC001128

ETIM 9.0

EC001128

# P | Cabling

Data sheet

Page 6/9

## E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

### Technical Data

#### Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	459 g
Packaging unit - Weight (pound)	1.01 lb
Packaging dimension	145 mm x 182 mm x 40 mm
Packaging dimension	5.709 in. x 7.165 in. x 1.575 in.

### Accessories

P/N	Designation
130898-00-I	BLIND module light gray
130898-00-RW-I	BLIND module pure white
130898-01-I	COAX modul F jack / F jack
130898-02-I	COAX modul IEC jack / F jack
130898-03-I	COAX modul IEC plug / F jack
130908-I-B1	UAE modul Cat.5e white
130909-I	UAE modul Cat.6 jack white
130910-I	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack
130910-I-B1	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack, T568B
130910-Z	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack, (12 pcs)
1309A0-I	E-DAT modul coupler 8(8) 180° class E <sub>A</sub>
130A11-29-I	UAE modul 8(8) Cat.6 <sub>A</sub> black
130A11-I	UAE modul 8(8) Cat.6 <sub>A</sub> white
130B11-25-E	25Gmodul
130B11-25-Z	25Gmodul (12 pcs)
130B11-E	C6 <sub>A</sub> modul 180° jack
130B11-Z	C6 <sub>A</sub> modul 180° jack (12 pcs)
15091001-I	OpDAT modul ST OS2
15091071-I	OpDAT modul LC-Duplex OS2
15091072-I	OpDAT modul LC-Duplex OM3
15091075-I	OpDAT modul LC-Duplex OM4
15091076-I	OpDAT modul LC-Duplex APC OS2
1509107B-I	OpDAT modul LC-Duplex OM2

# P | Cabling

Data sheet

Page 8/9

## E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

### Accessories from

P/N	Designation
1308990110-E	DIN rail adapter
130B10E2-E	Module frame 3RU, 7HP 6 port, aluminum, unequipped
854544-E	Module frame 1RU 19 inch, unequipped
854568-E	Module frame 10 inch 1RU

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!





# P | Cabling

Data sheet

Page 9/9

**E-DAT modul 6x8(8) for 1RU patch panel Cat.6<sub>A</sub>**

P/N

130922-03-E

EAN 4250184106197

2023/05/09

Version: AG

## Illustrations

Dimensional drawing

