




Terminals & Splices > Ring Terminals

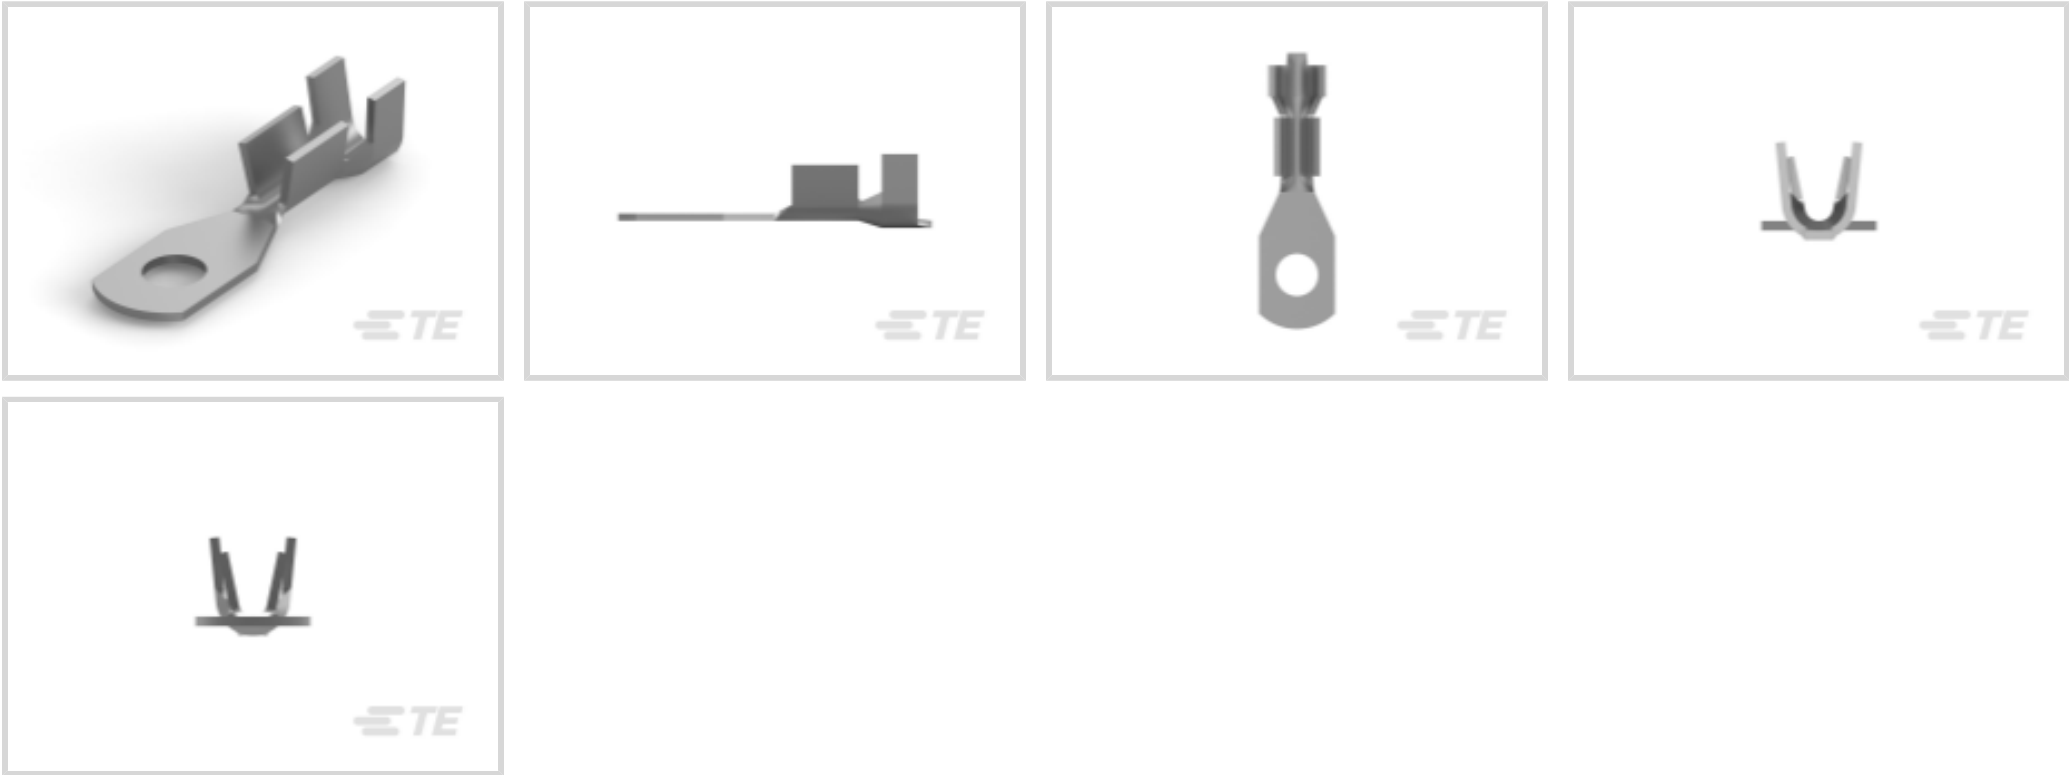

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 1624 – 4106 CMA

Stud Size: #5, M3

Features

Product Type Features

|  |                             |
|--|-----------------------------|
| Shape Description                      | Flat Sided                  |
| Ring Terminal Product Type             | Closed Ring Tongue Terminal |
| Stud Size                              | #5, M3                      |
| Sealable                               | No                          |
| Compatible With Discrete Wire Type     | Stranded                    |
| Wire Insulation Support Retention Type | Insulation Support          |

Configuration Features

|                 |   |
|-----------------|---|
| Number of Holes | 1 |
|-----------------|---|

Contact Features

|                               |          |
|-------------------------------|----------|
| Contact Base Material         | Brass    |
| Barrel Type                   | Open     |
| Terminal Orientation          | Straight |
| Terminal Plating Material     | Tin      |
| Contact Underplating Material | None     |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|



Dimensions

|                                      |                                   |
|--------------------------------------|-----------------------------------|
|                                      | .1 in                             |
| Wire Size                            | 1624 – 4106 CMA                   |
| Stud Diameter                        | 3.4 mm[.134 in]                   |
| Tongue Thickness                     | .51 mm[.02 in]                    |
| Product Length                       | 21.08 mm[.83 in]                  |
| Barrel Inside Diameter               | 1.52 mm, 2.92 mm[.06 in][.115 in] |
| Compatible Insulation Diameter (Max) | 3.56 mm[.14 in]                   |
| Compatible Insulation Diameter Range | 2.54 – 3.56 mm[.1 – .14 in]       |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

Operation/Application

|                                    |        |
|------------------------------------|--------|
| Compatible With Wire Base Material | Copper |
|------------------------------------|--------|

Industry Standards

|                               |    |
|-------------------------------|----|
| Government Qualified Terminal | No |
|-------------------------------|----|

Packaging Features

|                    |            |
|--------------------|------------|
| Packaging Quantity | 10000      |
| Packaging Method   | Strip/Reel |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free   |
| Solder Process Capability                     | Not applicable for solder process capability  |




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Customers Also Bought




TE Part #172158-1  
3 CIR UNIV M-N-L CAP




TE Part #216075-000  
General Purpose Hookup Wire: Tin Coated Copper Wire, 24 AWG



TE Part #170360-1  
UNIV M-N-L PIN 22-18 AWG



TE Part #40702  
RING 20-14 AWG BR



TE Part #1977873001  
SZF-1.00-MM

Documents

Product Drawings  
RING 18-14 AWG PTPBR  
English

CAD Files  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_63518-1\_B.2d\_dxf.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_63518-1\_B.3d\_igs.zip  
English  
Customer View Model

63518-1

Closed Ring Tongue Terminal, 18 – 14 AWG, #5 / M3 Stud Size, 3.4 mm [.134 in] Stud Diameter, Open Barrel, Straight, Tin, Uninsulated



ENG\_CVM\_CVM\_63518-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English