

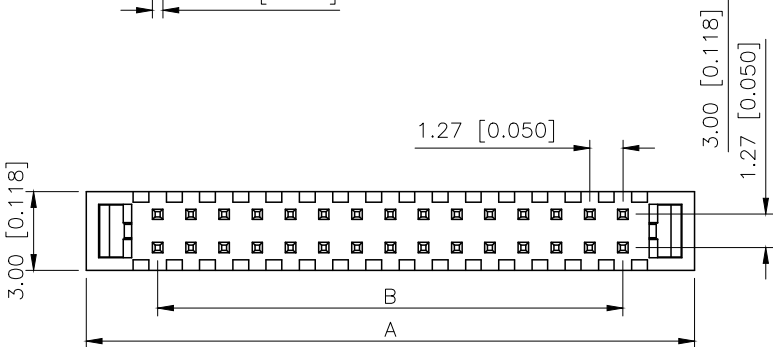
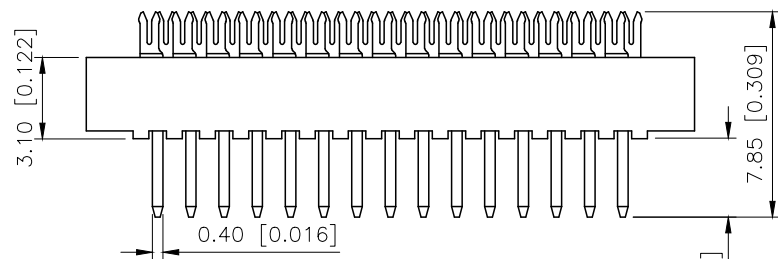




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.16	阿树

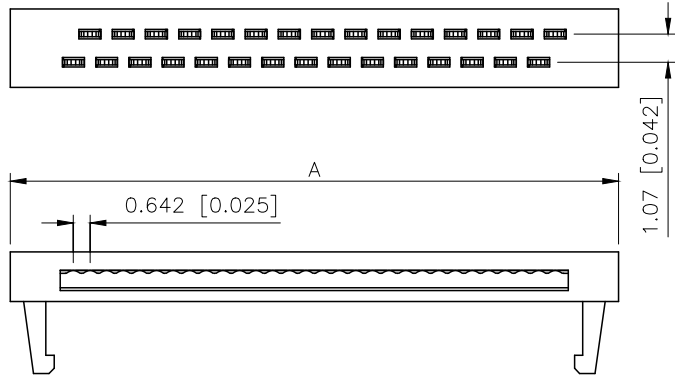



PART NO.:

X1270 H 1-2xXX-PT V01
 ① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:H-HSG
- ③Welding Board Angle:l-HSG+hardware
- ④Row No-Pin No:2xXX-2x03P~2x32P
- ⑤Material:PT-PBT UL94V-0
- ⑥Plating Category: V01-All Gold Flash

Specifications:
 规格:
 Voltage rating:250V AC/DC
 额定电压: 250V AC/DC
 Current rating:1A AC/DC
 额定电流: 1A AC/DC
 Withstanding voltage:1000V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range:-40°C~+25°C
 温度范围: -40°C~+125°C
 Insulation resistance:≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance:≤20mΩ MAX
 接触电阻: ≤20mΩ MAX

Poles	DIMENSION		Poles	DIMENSION	
	A	B		A	B
2x03	8.00	2.54	2x13	20.70	15.24
2x04	9.27	3.81	2x15	23.24	17.78
2x05	10.54	5.08	2x17	25.78	20.32
2x06	11.81	6.35	2x20	29.59	24.13
2x07	13.08	7.62	2x22	32.13	26.67
2x08	14.35	8.89	2x25	35.94	30.48
2x10	16.89	11.43	2x30	44.29	36.83
2x12	19.43	13.97	2x32	44.83	39.37

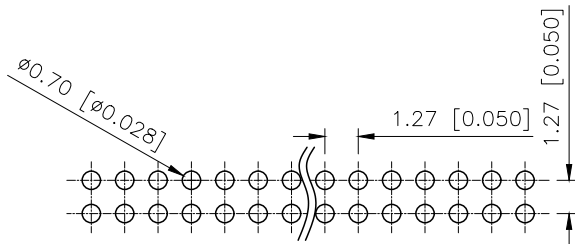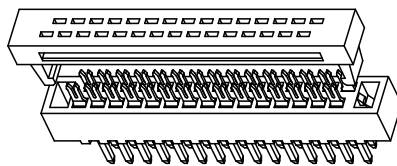

P.C.B Layout

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	1.27mm BTB Style Connectors
PART NO.:	X1270HI-2xXX-PTV01
DWG NO.:	