



RoHS COMPATIBLE, SEE NOTE 12

TOTAL NUMBER OF POSITIONS SEE SHEET 2


0= WITHOUT LATCH
1= STANDARD LATCH
2= LOW PROFILE LATCH

- 1 - HOUSING MAT'L : GLASS FILLED THERMOPLASTIC. UL94V-0 COLOR: BLUE
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - 0.76 μ m GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
2 μ m MIN MATTE TIN ON TAIL.
UNDERPLATE : 1.27 μ m Ni MIN
- 4 - PRODUCT PACKAGED IN TUBES
- 5 - 40N MIN LATCH RETENTION FORCE
AT FIRST EXTRACTION
- 6 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 7 - NO CENTRAL SLOT ON POSITIONS 6 & 8
- 8 - NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- 9 - NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- 10 - RETENTION LEGS LOCATED IN THE CENTER OF THE CONNECTOR
- 11 - MARKING : XX = YEAR CODE
YY = WEEK NUMBER
- 12 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2 μ m MINIMUM MATTE TIN OVER 1.27 μ m
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C $\pm$ 5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004

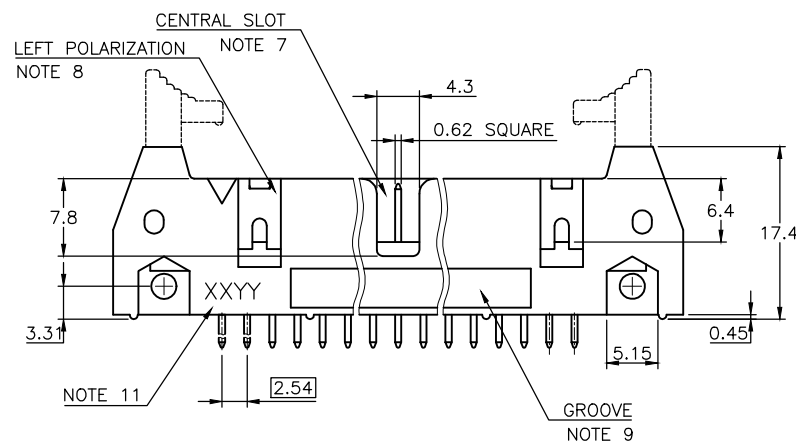




mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE						
ltr	ecn no	dr	date	tolerances unless otherwise specified				 mm scale 2:1		title SHR.EL.HEADER STR, RETENTION LEGS						
J	B-20413	BVE	15.03.10	angles linear		.X ±0.3										
D	F06-0229	LMU	06.07.18			.XX ±0.13										
						.XXX ±0.05										
E	F07-0195	LMU	07.05.25	dr	B.VERNIER		15.03.10				dwg no			sheet 1 of -		size
F	F08-0146	YOY	08.04.11	engr	L.MULIN		15.03.10				71980					A3
G	B-16860	LMU	14.01.27	chr	JCO		15.03.10									
H	B-19094	LMU	14.10.16	appd	JCO		15.03.10				type			CUSTOMER Drawing		
sheet index		revision sheet		J	A											
		sheet		1	2											

TOTAL NUMBER OF POSITIONS	
06	26
08	34
10	40
14	44
16	50
18	60
20	64

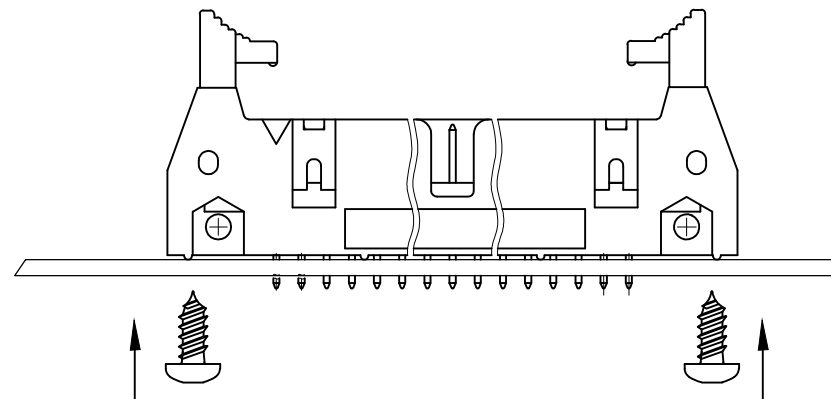

WHEN THE CONNECTORS NEED TO BE FIXED ON THE PCB'S
THE STAINLESS SCREWS REF TC POZI DIN7981 Ø2.9 X 6.5MM
TO BE USED

LATCHING FEATURES :

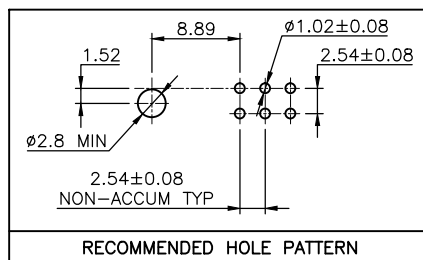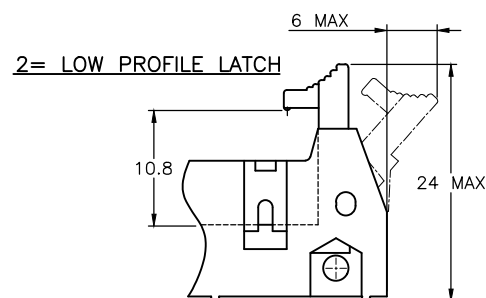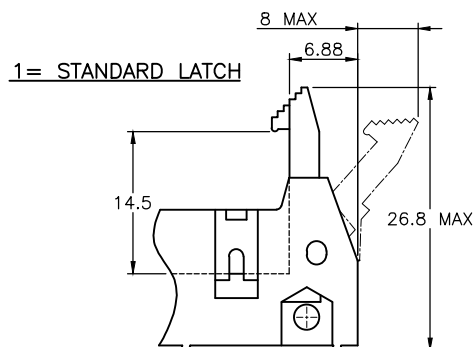

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family QUICKIE
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
A	B-20413	BVE	15.03.10	angles	linear	.X ±0.3 .XX ±0.13 .XXX ±0.05	SHR.EL.HEADER STR, RETENTION LEGS
				dr	B.VERNIER	15.03.10	dwg no
				enr	L.MULIN	15.03.10	sheet 2 of
				chr	JCO	15.03.10	71980
				appd	JCO	15.03.10	size
sheet	revision						type
index	sheet						CUSTOMER Drawing

