


NOTES:

- | | |
|---|--|
| <p>1) MATERIAL: SEE TABLE</p> <p>2) FINISHES: SEE TABLE</p> <p>3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE</p> <p>4) MATES WITH: QUICK CHANGE RECEPTACLE</p> <p>5) ELECTRICAL DATA:
 10AWG UL TYPE: TC-ER/STOOW STRANDED CABLE
 MAX VOLTAGE: 600V
 MAX CURRENT: 32A
 PROTECTION IP67 (WHEN MATED)
 TEMPERATURE RANGE: -20°C TO 105°C</p> | <p>6) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.</p> <p>7) ASSEMBLY IS RoHS COMPLIANT</p> <p>8. XX REFERS TO CIRCUIT COUNT</p> |
|---|--|

PART NUMBER LEGEND

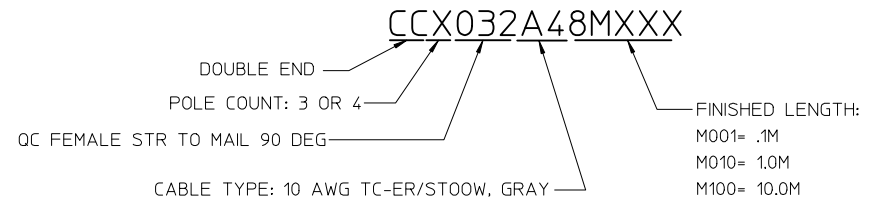

11	2	WARNING LABEL	VINYL	ORANGE/BLACK
10	1	WRAP LABEL	VINYL	BLACK/YELLOW
9	1	OVERMOLD, 90 DEG	PVC	GRAY
8	1	COUPLING, MALE	ALUMINUM	CLEAR ANODIZE
7	XX	CONTACT PIN	Cu ALLOY	GOLD PLATED
6	1	INSERT, MALE	PVC	BLACK
5	1	OVERMOLD, STRAIGHT	PVC	GRAY
4	1	COUPLING, FEMALE	ALUMINUM	CLEAR ANODIZE
3	XX	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, FEMALE	PVC	BLACK
1	1	CABLE, 10AWG TC-ER/STOOW (SEE NOTE 5)	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: IPG2016-1095 DRAWN BY: RSTONE 2016/02/09 CHKD: BRUPERT 2016/02/11 APPR: BWOODMAN 2016/03/04	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± --- 0 PLACE ± --- ± ---	mm INCH ± --- ± --- ± .01 ± --- ± ---	DRAWN BY: RSTONE DATE: 2016/02/09	CHECKED BY: BRUPERT DATE: 2016/02/11	APPROVED BY: BWOODMAN DATE: 2016/03/04	TITLE QUICK CHANGE CORD ASSY FEM STR TO MALE 90 DEG 10 AWG PVC CABLE GRAY
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. -	DOCUMENT NO. SD-130064-016		SHEET NO. 1 OF 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	