



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/27/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

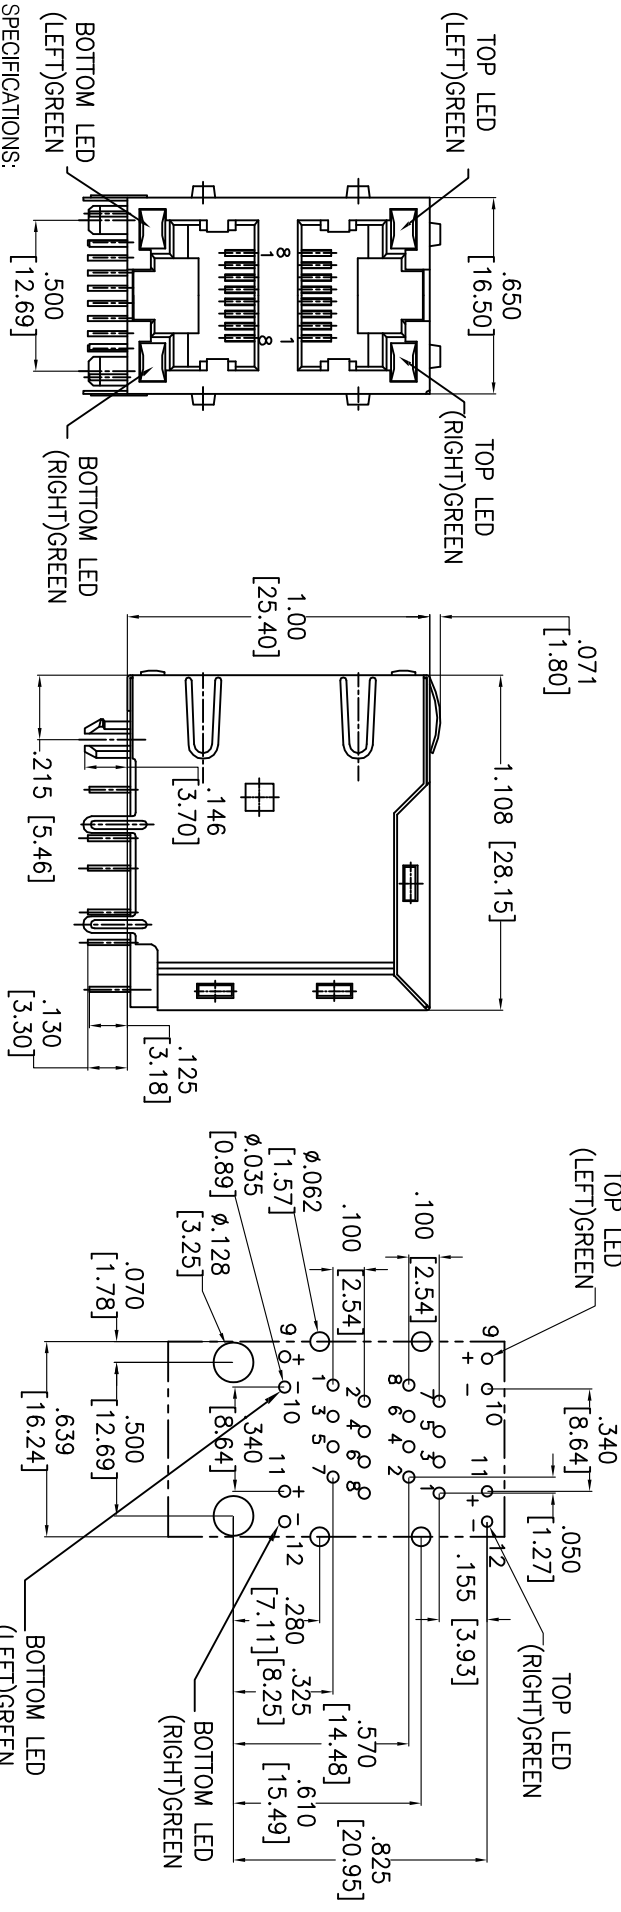

X	PLATING
0	15 μin Gold
1	30 μin Gold
2	50 μin Gold

RECOMMENDED PCB LAYOUT  
 (COMPONENT SIDE)

# ADAM TECH

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 2 PORT, 8P8C  
 LEFT LEDS GREEN & RIGHT LEDS GREEN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
HOLES	
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
SIZE	PART NO.
X	MTJG-2-88JX1-FSG-PG-LD
REF: S0005C	SCALE: NTS
	SHEET 1 OF 1

- A**
- Material: PA66, rated UL 94V-0
  - Insulator color: Black
  - Contacts: Phosphor Bronze
  - Shield: Brass, Nickel plated
  - Contact Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails (See chart for thickness).
  - Electrical: Voltage plating: 125 VAC RMS. Current resistance: 1.5 Amp. Contact resistance: 50 Milliohms max. Insulation Resistance: 1000M ohm Min@ 500 VDC Dielectric Withstanding Voltage: 1000 VAC for 1 minute. Temperature Rating: Operating temperature: -40°C to +85°C Environmental: Lead free, RoHS compliant. Recommended soldering temp: 235°C for 5 sec.
- B**
- C**
- D**

