




Chip LAN Choke


- 1.High common mode impedance at high frequency Effects excellent noise suppression performance
- 2.100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 3.Operating temperature-40~+125℃
- 4.Storage temperature range: -40℃ to +125℃.

Part Number	Inductance (μH) (100KHz/0.1V)	DC Resistance (Ω) max.	Capacitance (pf) max.	Rated Current (mA)max.	Rated Volt. (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
UTD3216C01 Q	60	1.70	35	200	50	125	10M


MECHANICAL

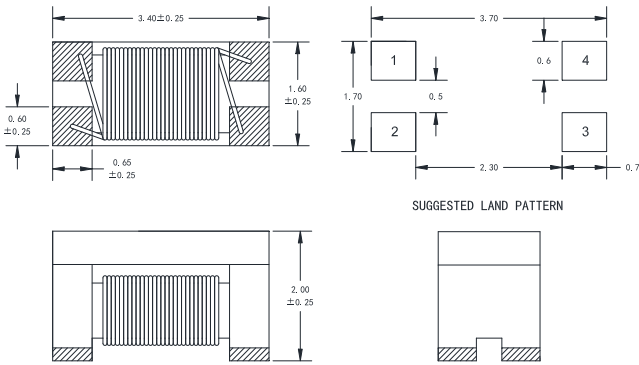

SCHEMATICS

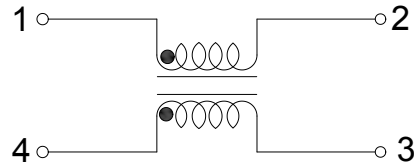


IMPEDEANCE FREQUENCY

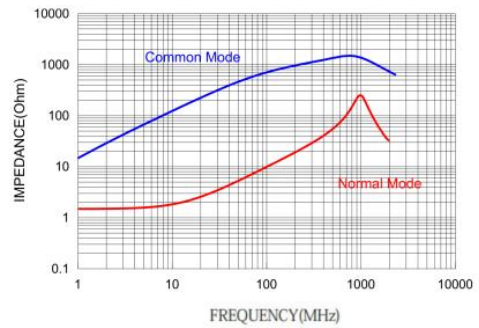


1. Unit: mm[inch]
2. Unless otherwise specified, all tolerances are ±0.20[008]

TAPING AND PACKING

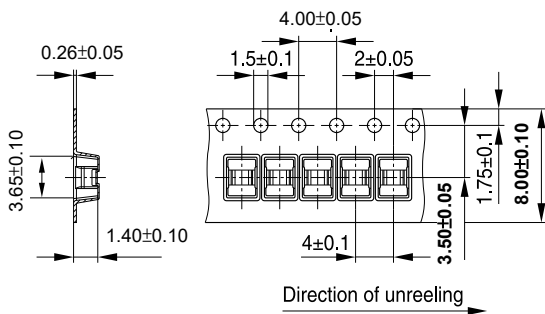

Reel

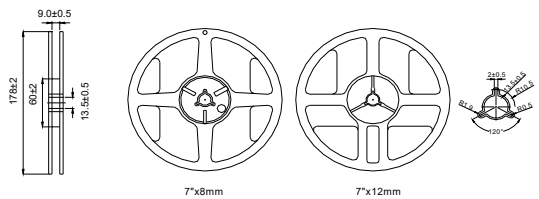

Dimensions in mm

Quantity (pcs):
2000 PCS PER REEL
5 REELS PER CARTON
10000PCS PER CARTON