

# Notice for TAIYO YUDEN Products

Please read this notice before using the TAIYO YUDEN products.

## ⚠ REMINDERS

### Product Information in this Catalog

Product information in this catalog is as of March 2023. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

### Approval of Product Specifications

Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with TAIYO YUDEN in advance.

### Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

### Limited Application

#### 1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment for consumer (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets, or the equipment approved separately by TAIYO YUDEN.

TAIYO YUDEN has the product series intended for use in the following equipment. Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

| Application | Product Series   |   | Quality Grade <sup>*3</sup> |
|-------------|--|---|-----------------------------|
|             | Equipment <sup>*1</sup>  | Category<br>(Part Number Code <sup>*2</sup> ) |                             |
| Automotive  | Automotive Electronic Equipment<br>(POWERTRAIN, SAFETY)                      | A   | 1                           |
|             | Automotive Electronic Equipment<br>(BODY & CHASSIS, INFOTAINMENT)            | C   | 2                           |
| Industrial  | Telecommunications Infrastructure and<br>Industrial Equipment                | B   | 2                           |
| Medical     | Medical Devices classified as GHTF Class C<br>(Japan Class III)              | M   | 2                           |
|             | Medical Devices classified as GHTF Classes A or B<br>(Japan Classes I or II) | L   | 3                           |
| Consumer    | General Electronic Equipment   | S   | 3                           |
|             | Only for Mobile Devices <sup>*4</sup>  | E   | 4                           |

\*Notes: 1. Based on the general specifications required for electronic components for such equipment, which are recognized by TAIYO YUDEN, the use of each product series for the equipment is recommended. Please be sure to contact TAIYO YUDEN before using our products for equipment other than those covered by the product series.

2. On each of our part number, the 2nd code from the left is a code indicating the "Category" as shown in the above table. For details, please check the explanatory materials regarding the part numbering system of each of our products.

3. Each product series is assigned a "Quality Grade" from 1 to 4 in order of higher quality. Please do not incorporate a product into any equipment with a higher Quality Grade than the Quality Grade of such product without the prior written consent of TAIYO YUDEN.

4. The applications covered by this product series are limited to mobile devices (smartphone, tablet PC, smartwatch, handheld game console, etc.) among general electronic equipment for consumer. The design, specifications and operating environment, etc. differ from those of the product series for "General Electronic Equipment" (Category: S), so please check the individual product specification sheets for details. The product series for "General Electronic Equipment" (Category: S) can also be used for mobile devices.

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

## 2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

## 3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment \*1
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices \*2
- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

\*Notes: 1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.

2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

## 4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

### ■ Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

### ■ Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.

### ■ Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves conforming to the product specifications specified in the individual product specification sheets, and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement, provided, however, that our products shall be used for general-purpose and standard use in the equipment specified in this catalog or the individual product specification sheets.

### ■ TAIYO YUDEN's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "TAIYO YUDEN's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN's official sales channel.

### ■ Caution for Export

Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

# Wire-wound Ferrite Power Inductors LSXN/LSXP series for General Electronic Equipment for Consumer

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

REFLOW

PART NUMBER

\* Operating Temp.: -25~+120°C (LSXN 4040/5050/6060/8080: -25~+125°C) (Including self-generated heat)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| L | S | X | N | D | 4 | 0 | 4 | 0 | K | K | L | 1 | 0 | 0 | M | D | G |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |   |   |   |   |   |   |   |   |   |   |

## ① Series

| Code<br>(1)(2)(3)(4) |   |
|----------------------|---|
| LSXN                 | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |
| LSXP                 | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

## (1) Product Group

| Code |           |
|------|-----------|
| L    | Inductors |

## (2) Category

| Code | Recommended equipment                     | Quality Grade |
|------|---|---------------|
| S    | General Electronic Equipment for Consumer | 3             |

## ② Features

| Code | Feature                        |
|------|--------------------------------|
| D    | Bottom electrode (Ag × solder) |
| E    | Bottom electrode (Cu × solder) |
| H    | Bottom electrode (Frame type)  |

## ③ Dimensions (L × W)

| Code | Dimensions (L × W) [mm] |
|------|-------------------------|
| 2020 | 2.0 × 2.0               |
| 2424 | 2.4 × 2.4               |
| 3030 | 3.0 × 3.0               |
| 4040 | 4.0 × 4.0               |
| 5050 | 5.0 × 5.0               |
| 6060 | 6.0 × 6.0               |
| 8080 | 8.0 × 8.0               |
| YE   | 4.5                     |

## ④ Dimensions (H)

| Code | Dimensions (H) [mm] |
|------|---------------------|
| KK   | 1.0                 |
| MK   | 1.2                 |
| PK   | 1.4                 |
| QK   | 1.5                 |
| TK   | 1.8                 |
| WK   | 2.0                 |
| WD   | 2.4                 |
| WE   | 2.5                 |
| WH   | 2.8                 |
| XK   | 3.0                 |
| XA   | 3.1                 |
| YK   | 4.0                 |
| YA   | 4.1                 |
| YB   | 4.2                 |

## (3) Type

| Code |                                |
|------|--------------------------------|
| X    | Ferrite Wire-wound (Drum type) |

## (4) Features, Characteristics

| Code |                          |
|------|--------------------------|
| N    | Standard Power choke     |
| P    | High current power choke |

## ⑤ Packaging

| Code | Packaging |
|------|-----------|
| T    | Taping    |
| L    | Taping    |

## ⑥ Nominal inductance

| Code<br>(example) | Nominal inductance [μH] |
|-------------------|-------------------------|
| 2R2               | 2.2                     |
| 100               | 10                      |
| 101               | 100                     |


※R=Decimal point

## ⑦ Inductance tolerance

| Code | Inductance tolerance |
|------|----------------------|
| M    | ±20%                 |
| N    | ±30%                 |


## ⑧ Internal code

## ■ STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY

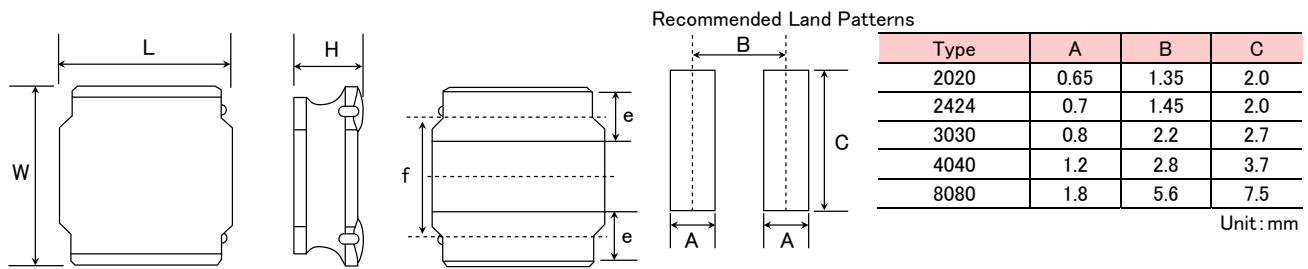

| Type   | L                        | W                        | H                      | e                         | f                         | Standard quantity<br>[pcs] Taping |
|--------|--------------------------|--------------------------|------------------------|---------------------------|---------------------------|-----------------------------------|
| 2020KK | 2.0±0.1<br>(0.079±0.004) | 2.0±0.1<br>(0.079±0.004) | 1.0 max<br>(0.039 max) | 0.5±0.2<br>(0.020±0.008)  | 1.25±0.2<br>(0.050±0.008) | 2500                              |
| 2020MK | 2.0±0.1<br>(0.079±0.004) | 2.0±0.1<br>(0.079±0.004) | 1.2 max<br>(0.047 max) | 0.5±0.2<br>(0.020±0.008)  | 1.25±0.2<br>(0.050±0.008) | 2500                              |
| 2424KK | 2.4±0.1<br>(0.095±0.004) | 2.4±0.1<br>(0.095±0.004) | 1.0 max<br>(0.039 max) | 0.6±0.2<br>(0.024±0.008)  | 1.45±0.2<br>(0.057±0.008) | 2500                              |
| 2424MK | 2.4±0.1<br>(0.095±0.004) | 2.4±0.1<br>(0.095±0.004) | 1.2 max<br>(0.047 max) | 0.6±0.2<br>(0.024±0.008)  | 1.45±0.2<br>(0.057±0.008) | 2500                              |
| 3030KK | 3.0±0.1<br>(0.118±0.004) | 3.0±0.1<br>(0.118±0.004) | 1.0 max<br>(0.039 max) | 0.9±0.2<br>(0.035±0.008)  | 1.9±0.2<br>(0.075±0.008)  | 2000                              |
| 3030MK | 3.0±0.1<br>(0.118±0.004) | 3.0±0.1<br>(0.118±0.004) | 1.2 max<br>(0.047 max) | 0.9±0.2<br>(0.035±0.008)  | 1.9±0.2<br>(0.075±0.008)  | 2000                              |
| 3030QK | 3.0±0.1<br>(0.118±0.004) | 3.0±0.1<br>(0.118±0.004) | 1.5 max<br>(0.059 max) | 0.9±0.2<br>(0.035±0.008)  | 1.9±0.2<br>(0.075±0.008)  | 2000                              |
| 4040KK | 4.0±0.2<br>(0.158±0.008) | 4.0±0.2<br>(0.158±0.008) | 1.0 max<br>(0.039 max) | 1.1±0.2<br>(0.043±0.008)  | 2.5±0.2<br>(0.098±0.008)  | 5000                              |
| 4040MK | 4.0±0.2<br>(0.158±0.008) | 4.0±0.2<br>(0.158±0.008) | 1.2 max<br>(0.047 max) | 1.1±0.2<br>(0.043±0.008)  | 2.5±0.2<br>(0.098±0.008)  | 4500                              |
| 4040TK | 4.0±0.2<br>(0.158±0.008) | 4.0±0.2<br>(0.158±0.008) | 1.8 max<br>(0.071 max) | 1.1±0.2<br>(0.043±0.008)  | 2.5±0.2<br>(0.098±0.008)  | 3500                              |
| 8080XK | 8.0±0.2<br>(0.315±0.008) | 8.0±0.2<br>(0.315±0.008) | 3.0 max<br>(0.118 max) | 1.60±0.3<br>(0.063±0.012) | 5.6±0.3<br>(0.22±0.012)   | 1000                              |
| 8080YK | 8.0±0.2<br>(0.315±0.008) | 8.0±0.2<br>(0.315±0.008) | 4.0 max<br>(0.158 max) | 1.60±0.3<br>(0.063±0.012) | 5.6±0.3<br>(0.22±0.012)   | 1000                              |
| 8080YB | 8.0±0.2<br>(0.315±0.008) | 8.0±0.2<br>(0.315±0.008) | 4.2 max<br>(0.165 max) | 1.60±0.3<br>(0.063±0.012) | 5.6±0.3<br>(0.22±0.012)   | 1000                              |

Unit: mm (inch)

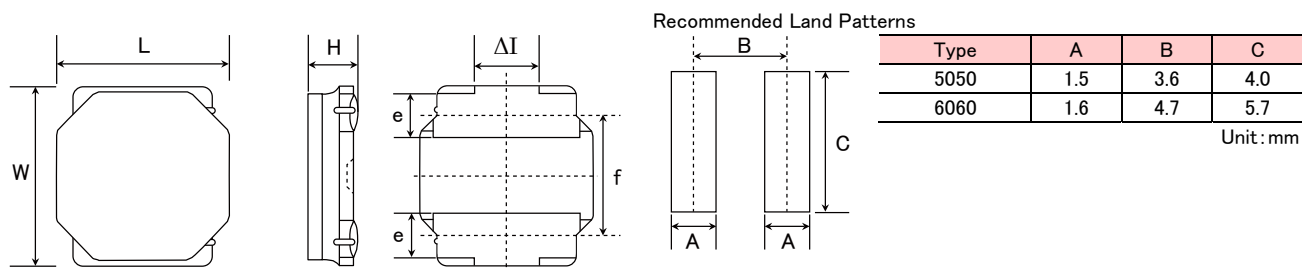

| Type   | L                                      | W                                      | H                      | e                                       | f                                      | $\Delta I$           | Standard quantity<br>[pcs] Taping |
|--------|--|--|------------------------|---|--|----------------------|-----------------------------------|
| 5050KK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 1.0 max<br>(0.039 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 1000                              |
| 5050MK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 1.2 max<br>(0.047 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 1000                              |
| 5050PK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 1.4 max<br>(0.055 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 1000                              |
| 5050WK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 2.0 max<br>(0.079 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 800                               |
| 5050WD | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 2.4 max<br>(0.095 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 2500                              |
| 5050WE | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 2.5 max<br>(0.098 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 2500                              |
| 5050XK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 3.0 max<br>(0.118 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 500                               |
| 5050XA | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 3.1 max<br>(0.122 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 500                               |
| 5050YK | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 4.0 max<br>(0.158 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 1500                              |
| 5050YA | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | $4.9 \pm 0.2$<br>( $0.193 \pm 0.008$ ) | 4.1 max<br>(0.161 max) | $1.2 \pm 0.2$<br>( $0.047 \pm 0.008$ )  | $3.3 \pm 0.2$<br>( $0.130 \pm 0.008$ ) | 1.3typ<br>(0.051typ) | 1500                              |
| 6060KK | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 1.0 max<br>(0.039 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 1000                              |
| 6060MK | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 1.2 max<br>(0.047 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 1000                              |
| 6060PK | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 1.4 max<br>(0.055 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 1000                              |
| 6060WK | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 2.0 max<br>(0.079 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 2500                              |
| 6060WH | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 2.8 max<br>(0.110 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 2000                              |
| 6060YE | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | $6.0 \pm 0.2$<br>( $0.236 \pm 0.008$ ) | 4.5 max<br>(0.177 max) | $1.35 \pm 0.2$<br>( $0.053 \pm 0.008$ ) | $4.0 \pm 0.2$<br>( $0.158 \pm 0.008$ ) | 2.3typ<br>(0.091typ) | 1500                              |

Unit: mm (inch)

■ PART NUMBER

● 2020MK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND2020MKT1R0N0G | NRS2012T 1R0N GJ                   | RoHS | 1.0                        | ±30%                 | —  | 0.070                       | 1,900                    | 2,050 | 1,700                          | 1,850 | 100                             |
| LSXND2020MKT1R5N0G | NRS2012T 1R5N GJ                   | RoHS | 1.5                        | ±30%                 | —  | 0.090                       | 1,650                    | 1,800 | 1,500                          | 1,650 | 100                             |
| LSXND2020MKT2R2M0G | NRS2012T 2R2M GJ                   | RoHS | 2.2                        | ±20%                 | —  | 0.107                       | 1,350                    | 1,500 | 1,370                          | 1,500 | 100                             |
| LSXND2020MKT3R3M0G | NRS2012T 3R3M GJ                   | RoHS | 3.3                        | ±20%                 | —  | 0.190                       | 1,000                    | 1,150 | 1,020                          | 1,100 | 100                             |
| LSXND2020MKT4R7M0G | NRS2012T 4R7M GJ                   | RoHS | 4.7                        | ±20%                 | —  | 0.241                       | 900                      | 1,050 | 910                            | 1,000 | 100                             |

● 2020KK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXPD2020KKT4R7N0G | NRV2010T 4R7N GF                   | RoHS | 0.47                       | ±30%                 | —  | 0.052                       | 2,100                    | 2,250 | 2,000                          | 2,300 | 100                             |
| LSXPD2020KKT6R8N0G | NRV2010T 6R8N GF                   | RoHS | 0.68                       | ±30%                 | —  | 0.060                       | 1,850                    | 2,000 | 1,850                          | 2,100 | 100                             |
| LSXPD2020KKT1R0N0G | NRV2010T 1R0N GF                   | RoHS | 1.0                        | ±30%                 | —  | 0.080                       | 1,550                    | 1,700 | 1,600                          | 1,850 | 100                             |
| LSXPD2020KKT1R5M0G | NRV2010T 1R5M GF                   | RoHS | 1.5                        | ±20%                 | —  | 0.100                       | 1,350                    | 1,450 | 1,450                          | 1,650 | 100                             |
| LSXPD2020KKT2R2M0G | NRV2010T 2R2M GF                   | RoHS | 2.2                        | ±20%                 | —  | 0.175                       | 1,100                    | 1,200 | 1,100                          | 1,200 | 100                             |
| LSXPD2020KKT3R3M0G | NRV2010T 3R3M GF                   | RoHS | 3.3                        | ±20%                 | —  | 0.250                       | 880                      | 950   | 1,000                          | 1,100 | 100                             |
| LSXPD2020KKT4R7M0G | NRV2010T 4R7M GF                   | RoHS | 4.7                        | ±20%                 | —  | 0.320                       | 760                      | 810   | 820                            | 930   | 100                             |

● 2020MK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXPD2020MKT1R0N0G | NRV2012T 1R0N GF                   | RoHS | 1.0                        | ±30%                 | —  | 0.073                       | 2,200                    | 2,350 | 1,650                          | 1,830 | 100                             |
| LSXPD2020MKT1R5N0G | NRV2012T 1R5N GF                   | RoHS | 1.5                        | ±30%                 | —  | 0.100                       | 1,800                    | 1,950 | 1,400                          | 1,550 | 100                             |
| LSXPD2020MKT2R2M0G | NRV2012T 2R2M GF                   | RoHS | 2.2                        | ±20%                 | —  | 0.129                       | 1,600                    | 1,700 | 1,200                          | 1,350 | 100                             |
| LSXPD2020MKT3R3M0G | NRV2012T 3R3M GF                   | RoHS | 3.3                        | ±20%                 | —  | 0.227                       | 1,250                    | 1,350 | 900                            | 1,040 | 100                             |
| LSXPD2020MKT4R7M0G | NRV2012T 4R7M GF                   | RoHS | 4.7                        | ±20%                 | —  | 0.325                       | 1,100                    | 1,150 | 750                            | 850   | 100                             |

● 2424KK type

| New part number   | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|-------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                   |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                   |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXNE2424KKT6R8NN | NRH2410T 6R8NN 4                   | RoHS | 0.68                       | ±30%                 | 120  | 0.060                       | 2,200                    | 2,300 | 1,570                          | 1,810 | 100                             |
| LSXNE2424KKT1R0NN | NRH2410T 1R0NN 4                   | RoHS | 1.0                        | ±30%                 | 106  | 0.070                       | 1,800                    | 1,950 | 1,410                          | 1,640 | 100                             |
| LSXNE2424KKT1R5MN | NRH2410T 1R5MN                     | RoHS | 1.5                        | ±20%                 | 94   | 0.110                       | 1,550                    | 1,640 | 1,160                          | 1,320 | 100                             |
| LSXNE2424KKT2R2MN | NRH2410T 2R2MN                     | RoHS | 2.2                        | ±20%                 | 77   | 0.150                       | 1,290                    | 1,340 | 970                            | 1,110 | 100                             |
| LSXNE2424KKT3R3MN | NRH2410T 3R3MN                     | RoHS | 3.3                        | ±20%                 | 56   | 0.220                       | 1,000                    | 1,140 | 770                            | 890   | 100                             |
| LSXNE2424KKT4R7MN | NRH2410T 4R7MN                     | RoHS | 4.7                        | ±20%                 | 50   | 0.290                       | 880                      | 930   | 670                            | 780   | 100                             |
| LSXNE2424KKT6R8MN | NRH2410T 6R8MN                     | RoHS | 6.8                        | ±20%                 | 43   | 0.410                       | 750                      | 765   | 570                            | 650   | 100                             |
| LSXNE2424KKT100MN | NRH2410T 100MN                     | RoHS | 10                         | ±20%                 | 32   | 0.690                       | 550                      | 605   | 450                            | 520   | 100                             |
| LSXNE2424KKT150MN | NRH2410T 150MN                     | RoHS | 15                         | ±20%                 | 27   | 1.02                        | 470                      | 520   | 370                            | 430   | 100                             |
| LSXNE2424KKT220MN | NRH2410T 220MN                     | RoHS | 22                         | ±20%                 | 22   | 1.47                        | 390                      | 405   | 300                            | 340   | 100                             |

● 2424MK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXNE2424MKT4R7NNG | NRH2412T 4R7NNGJ                   | RoHS | 0.47                       | ±30%                 | 180  | 0.050                       | 2,900                    | 3,690 | 2,100                          | 2,300 | 100                             |
| LSXNE2424MKT1R0NNG | NRH2412T 1R0NNGH                   | RoHS | 1.0                        | ±30%                 | 101  | 0.077                       | 2,350                    | 2,610 | 1,300                          | 1,540 | 100                             |
| LSXNE2424MKT1R5MNG | NRH2412T 1R5MNGH                   | RoHS | 1.5                        | ±30%                 | 89   | 0.100                       | 2,100                    | 2,290 | 1,150                          | 1,390 | 100                             |
| LSXNE2424MKT2R2MNG | NRH2412T 2R2MNGH                   | RoHS | 2.2                        | ±20%                 | 72   | 0.140                       | 1,700                    | 1,940 | 1,000                          | 1,190 | 100                             |
| LSXNE2424MKT3R3MNG | NRH2412T 3R3MNGH                   | RoHS | 3.3                        | ±20%                 | 56   | 0.225                       | 1,400                    | 1,600 | 750                            | 890   | 100                             |
| LSXNE2424MKT4R7MNG | NRH2412T 4R7MNGH                   | RoHS | 4.7                        | ±20%                 | 45   | 0.300                       | 1,150                    | 1,280 | 650                            | 770   | 100                             |
| LSXNE2424MKT6R8MNG | NRH2412T 6R8MNGH                   | RoHS | 6.8                        | ±20%                 | 34   | 0.420                       | 950                      | 1,100 | 550                            | 635   | 100                             |
| LSXNE2424MKT100MNG | NRH2412T 100MNGH                   | RoHS | 10                         | ±20%                 | 29   | 0.600                       | 810                      | 900   | 450                            | 510   | 100                             |

● 3030KK type

| New part number   | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|-------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                   |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                   |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXNE3030KKT1R2NN | NRH3010T 1R2NN                     | RoHS | 1.2                        | ±30%                 | 120  | 0.065                       | 1,700                    | 1,740 | 1,480                          | 1,850 | 100                             |
| LSXNE3030KKT1R5NN | NRH3010T 1R5NN                     | RoHS | 1.5                        | ±30%                 | 99   | 0.075                       | 1,440                    | 1,500 | 1,370                          | 1,680 | 100                             |
| LSXNE3030KKT2R2MN | NRH3010T 2R2MN                     | RoHS | 2.2                        | ±20%                 | 86   | 0.083                       | 1,300                    | 1,400 | 1,300                          | 1,550 | 100                             |
| LSXNE3030KKT3R3MN | NRH3010T 3R3MN                     | RoHS | 3.3                        | ±20%                 | 64   | 0.130                       | 1,000                    | 1,020 | 1,030                          | 1,220 | 100                             |
| LSXNE3030KKT4R7MN | NRH3010T 4R7MN                     | RoHS | 4.7                        | ±20%                 | 50   | 0.170                       | 850                      | 930   | 900                            | 1,090 | 100                             |
| LSXNE3030KKT6R8MN | NRH3010T 6R8MN                     | RoHS | 6.8                        | ±20%                 | 44   | 0.250                       | 700                      | 750   | 745                            | 920   | 100                             |
| LSXNE3030KKT100MN | NRH3010T 100MN                     | RoHS | 10                         | ±20%                 | 34   | 0.350                       | 600                      | 650   | 620                            | 780   | 100                             |
| LSXNE3030KKT150MN | NRH3010T 150MN                     | RoHS | 15                         | ±20%                 | 25   | 0.550                       | 450                      | 520   | 480                            | 600   | 100                             |
| LSXNE3030KKT220MN | NRH3010T 220MN                     | RoHS | 22                         | ±20%                 | 22   | 0.770                       | 380                      | 440   | 410                            | 510   | 100                             |
| LSXNE3030KKT330MN | NRH3010T 330MN                     | RoHS | 33                         | ±20%                 | 20   | 1.250                       | 290                      | 360   | 350                            | 440   | 100                             |
| LSXNE3030KKT470MN | NRH3010T 470MN                     | RoHS | 47                         | ±20%                 | 17   | 2.050                       | 250                      | 300   | 285                            | 320   | 100                             |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 3030MK type

| New part number   | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|-------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                   |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                   |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXNE3030MKT47NN  | NRH3012T R47NN                     | RoHS | 0.47                       | ±30%                 | 160  | 0.033                       | 2,600                    | 3,200 | 1,900                          | 2,280 | 100                             |
| LSXNE3030MKT1R0NN | NRH3012T 1R0NN                     | RoHS | 1.0                        | ±30%                 | 111  | 0.048                       | 2,200                    | 2,500 | 1,710                          | 1,970 | 100                             |
| LSXNE3030MKT1R5NN | NRH3012T 1R5NN                     | RoHS | 1.5                        | ±30%                 | 95   | 0.055                       | 1,700                    | 1,900 | 1,600                          | 1,750 | 100                             |
| LSXNE3030MKT2R2MN | NRH3012T 2R2MN                     | RoHS | 2.2                        | ±20%                 | 78   | 0.075                       | 1,500                    | 1,750 | 1,370                          | 1,600 | 100                             |
| LSXNE3030MKT3R3MN | NRH3012T 3R3MN                     | RoHS | 3.3                        | ±20%                 | 61   | 0.100                       | 1,200                    | 1,500 | 1,210                          | 1,480 | 100                             |
| LSXNE3030MKT4R7MN | NRH3012T 4R7MN                     | RoHS | 4.7                        | ±20%                 | 50   | 0.130                       | 1,000                    | 1,200 | 1,060                          | 1,280 | 100                             |
| LSXNE3030MKT6R8MN | NRH3012T 6R8MN                     | RoHS | 6.8                        | ±20%                 | 43   | 0.190                       | 850                      | 910   | 890                            | 1,000 | 100                             |
| LSXNE3030MKT100MN | NRH3012T 100MN                     | RoHS | 10                         | ±20%                 | 32   | 0.270                       | 730                      | 780   | 720                            | 850   | 100                             |
| LSXNE3030MKT150MN | NRH3012T 150MN                     | RoHS | 15                         | ±20%                 | 26   | 0.450                       | 530                      | 650   | 570                            | 680   | 100                             |
| LSXNE3030MKT220MN | NRH3012T 220MN                     | RoHS | 22                         | ±20%                 | 22   | 0.630                       | 500                      | 550   | 500                            | 590   | 100                             |
| LSXNE3030MKT330MN | NRH3012T 330MN                     | RoHS | 33                         | ±20%                 | 18   | 0.960                       | 360                      | 430   | 450                            | 510   | 100                             |
| LSXNE3030MKT470MN | NRH3012T 470MN                     | RoHS | 47                         | ±20%                 | 16   | 1.340                       | 280                      | 380   | 380                            | 430   | 100                             |

● 3030MK type

| New part number  | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                  |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                  |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXPD3030MKT1R0N | NRV3012T 1R0N                      | RoHS | 1.0                        | ±30%                 | 110  | 0.065                       | 2,500                    | 3,000 | 1,600                          | 1,970 | 100                             |
| LSXPD3030MKT1R5N | NRV3012T 1R5N                      | RoHS | 1.5                        | ±30%                 | 92   | 0.075                       | 2,100                    | 2,500 | 1,400                          | 1,610 | 100                             |
| LSXPD3030MKT2R2M | NRV3012T 2R2M                      | RoHS | 2.2                        | ±20%                 | 70   | 0.120                       | 1,800                    | 2,100 | 1,100                          | 1,330 | 100                             |
| LSXPD3030MKT3R3M | NRV3012T 3R3M                      | RoHS | 3.3                        | ±20%                 | 55   | 0.150                       | 1,600                    | 1,900 | 1,000                          | 1,260 | 100                             |
| LSXPD3030MKT4R7M | NRV3012T 4R7M                      | RoHS | 4.7                        | ±20%                 | 48   | 0.190                       | 1,250                    | 1,500 | 850                            | 1,040 | 100                             |
| LSXPD3030MKT6R8M | NRV3012T 6R8M                      | RoHS | 6.8                        | ±20%                 | 40   | 0.300                       | 950                      | 1,200 | 650                            | 800   | 100                             |
| LSXPD3030MKT100M | NRV3012T 100M                      | RoHS | 10                         | ±20%                 | 32   | 0.470                       | 800                      | 990   | 550                            | 640   | 100                             |

● 3030QK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND3030QKT1R0NNG | NRS3015T 1R0NNGH                   | RoHS | 1.0                        | ±30%                 | 100  | 0.030                       | 2,100                    | 2,400 | 2,100                          | 2,350 | 100                             |
| LSXND3030QKT1R5NNG | NRS3015T 1R5NNGH                   | RoHS | 1.5                        | ±30%                 | 87   | 0.038                       | 1,800                    | 2,100 | 1,820                          | 2,100 | 100                             |
| LSXND3030QKT2R2MNG | NRS3015T 2R2MNGH                   | RoHS | 2.2                        | ±20%                 | 64   | 0.058                       | 1,480                    | 1,700 | 1,500                          | 1,800 | 100                             |
| LSXND3030QKT3R3MNG | NRS3015T 3R3MNGH                   | RoHS | 3.3                        | ±20%                 | 49   | 0.078                       | 1,210                    | 1,400 | 1,230                          | 1,500 | 100                             |
| LSXND3030QKT4R7MNG | NRS3015T 4R7MNGH                   | RoHS | 4.7                        | ±20%                 | 40   | 0.120                       | 1,020                    | 1,100 | 1,040                          | 1,300 | 100                             |
| LSXND3030QKT6R8MNG | NRS3015T 6R8MNGH                   | RoHS | 6.8                        | ±20%                 | 36   | 0.160                       | 870                      | 920   | 880                            | 1,100 | 100                             |
| LSXND3030QKT100MNG | NRS3015T 100MNGH                   | RoHS | 10                         | ±20%                 | 28   | 0.220                       | 700                      | 750   | 710                            | 840   | 100                             |
| LSXND3030QKT150MNG | NRS3015T 150MNGH                   | RoHS | 15                         | ±20%                 | 23   | 0.325                       | 580                      | 680   | 680                            | 760   | 100                             |
| LSXND3030QKT220MNG | NRS3015T 220MNGH                   | RoHS | 22                         | ±20%                 | 20   | 0.520                       | 470                      | 540   | 470                            | 530   | 100                             |
| LSXND3030QKT330MNG | NRS3015T 330MNGH                   | RoHS | 33                         | ±20%                 | 18   | 0.780                       | 400                      | 440   | 440                            | 490   | 100                             |
| LSXND3030QKT470MNG | NRS3015T 470MNGH                   | RoHS | 47                         | ±20%                 | 17   | 1.100                       | 325                      | 380   | 350                            | 380   | 100                             |

● 4040KK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND4040KKL1R0NDG | NRS4010T 1R0NDGG                   | RoHS | 1.0                        | ±30%                 | 116  | 0.056                       | 2,000                    | 2,280 | 1,900                          | 2,390 | 100                             |
| LSXND4040KKL2R2MDG | NRS4010T 2R2MDGG                   | RoHS | 2.2                        | ±20%                 | 73   | 0.085                       | 1,200                    | 1,610 | 1,500                          | 1,800 | 100                             |
| LSXND4040KKL3R3MDG | NRS4010T 3R3MDGG                   | RoHS | 3.3                        | ±20%                 | 58   | 0.100                       | 1,100                    | 1,300 | 1,400                          | 1,700 | 100                             |
| LSXND4040KKL4R7MDG | NRS4010T 4R7MDGG                   | RoHS | 4.7                        | ±20%                 | 47   | 0.140                       | 950                      | 1,100 | 1,200                          | 1,450 | 100                             |
| LSXND4040KKL6R8MDG | NRS4010T 6R8MDGG                   | RoHS | 6.8                        | ±20%                 | 38   | 0.200                       | 800                      | 890   | 1,000                          | 1,200 | 100                             |
| LSXND4040KKL100MDG | NRS4010T 100MDGG                   | RoHS | 10                         | ±20%                 | 31   | 0.300                       | 620                      | 760   | 750                            | 860   | 100                             |
| LSXND4040KKL150MDG | NRS4010T 150MDGG                   | RoHS | 15                         | ±20%                 | 24   | 0.430                       | 540                      | 635   | 600                            | 700   | 100                             |
| LSXND4040KKL220MDG | NRS4010T 220MDGG                   | RoHS | 22                         | ±20%                 | 19   | 0.570                       | 450                      | 540   | 500                            | 600   | 100                             |
| LSXND4040KKL330MDG | NRS4010T 330MDGG                   | RoHS | 33                         | ±20%                 | 15   | 0.900                       | 350                      | 440   | 400                            | 460   | 100                             |
| LSXND4040KKL470MDG | NRS4010T 470MDGG                   | RoHS | 47                         | ±20%                 | 13   | 1.250                       | 300                      | 350   | 350                            | 370   | 100                             |

● 4040MK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND4040MKL1R0NDG | NRS4012T 1R0NDGG                   | RoHS | 1.0                        | ±30%                 | 100  | 0.042                       | 2,800                    | 2,900 | 2,200                          | 2,670 | 100                             |
| LSXND4040MKL1R5NDG | NRS4012T 1R5NDGG                   | RoHS | 1.5                        | ±30%                 | 90   | 0.051                       | 2,300                    | 2,500 | 2,000                          | 2,430 | 100                             |
| LSXND4040MKL2R2MDG | NRS4012T 2R2MDGJ                   | RoHS | 2.2                        | ±20%                 | 70   | 0.060                       | 1,650                    | 1,950 | 1,900                          | 2,100 | 100                             |
| LSXND4040MKL3R3MDG | NRS4012T 3R3MDGJ                   | RoHS | 3.3                        | ±20%                 | 60   | 0.070                       | 1,400                    | 1,700 | 1,700                          | 1,880 | 100                             |
| LSXND4040MKL4R7MDG | NRS4012T 4R7MDGJ                   | RoHS | 4.7                        | ±20%                 | 45   | 0.095                       | 1,200                    | 1,320 | 1,500                          | 1,570 | 100                             |
| LSXND4040MKL6R8MDG | NRS4012T 6R8MDGJ                   | RoHS | 6.8                        | ±20%                 | 35   | 0.125                       | 900                      | 1,170 | 1,300                          | 1,400 | 100                             |
| LSXND4040MKL100MDG | NRS4012T 100MDGJ                   | RoHS | 10                         | ±20%                 | 30   | 0.170                       | 800                      | 990   | 1,100                          | 1,200 | 100                             |
| LSXND4040MKL150MDG | NRS4012T 150MDGJ                   | RoHS | 15                         | ±20%                 | 24   | 0.260                       | 650                      | 820   | 750                            | 840   | 100                             |
| LSXND4040MKL220MDG | NRS4012T 220MDGJ                   | RoHS | 22                         | ±20%                 | 18   | 0.400                       | 500                      | 620   | 620                            | 650   | 100                             |
| LSXND4040MKL330MDG | NRS4012T 330MDGJ                   | RoHS | 33                         | ±20%                 | 15   | 0.600                       | 400                      | 500   | 480                            | 530   | 100                             |
| LSXND4040MKL470MDG | NRS4012T 470MDGJ                   | RoHS | 47                         | ±20%                 | 12   | 0.770                       | 350                      | 430   | 420                            | 470   | 100                             |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.





## PART NUMBER

## ● 5050WE/5050WD type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm 20\%$ ) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND5050WEL1R0NMG | NRS5024T 1R0NMGJ                   | RoHS | 1.0                              | $\pm 30\%$           | 85   | 0.016  | 5,800                    | 6,800 | 4,400                          | 4,900 | 100                             |
| LSXND5050WEL1R5NMG | NRS5024T 1R5NMGJ                   | RoHS | 1.5                              | $\pm 30\%$           | 67   | 0.022  | 5,200                    | 5,800 | 3,600                          | 4,300 | 100                             |
| LSXND5050WDL2R2NMG | NRS5024T 2R2NMGJ                   | RoHS | 2.2                              | $\pm 30\%$           | 51   | 0.029  | 4,100                    | 4,800 | 3,100                          | 3,600 | 100                             |
| LSXND5050WDL3R3NMG | NRS5024T 3R3NMGJ                   | RoHS | 3.3                              | $\pm 30\%$           | 41   | 0.043  | 3,100                    | 3,700 | 2,400                          | 2,750 | 100                             |
| LSXND5050WDL4R7MMG | NRS5024T 4R7MMGJ                   | RoHS | 4.7                              | $\pm 20\%$           | 37   | 0.055  | 2,700                    | 3,400 | 2,000                          | 2,400 | 100                             |
| LSXND5050WDL6R8MMG | NRS5024T 6R8MMGJ                   | RoHS | 6.8                              | $\pm 20\%$           | 28   | 0.080  | 2,200                    | 2,750 | 1,600                          | 1,800 | 100                             |
| LSXND5050WDL100MMG | NRS5024T 100MMGJ                   | RoHS | 10                               | $\pm 20\%$           | 21   | 0.125  | 1,700                    | 2,100 | 1,200                          | 1,460 | 100                             |
| LSXND5050WDL150MMG | NRS5024T 150MMGJ                   | RoHS | 15                               | $\pm 20\%$           | 18   | 0.170  | 1,400                    | 1,750 | 1,000                          | 1,250 | 100                             |
| LSXND5050WDL220MMG | NRS5024T 220MMGJ                   | RoHS | 22                               | $\pm 20\%$           | 15   | 0.230  | 1,200                    | 1,450 | 820                            | 900   | 100                             |
| LSXND5050WDL330MMG | NRS5024T 330MMGJ                   | RoHS | 33                               | $\pm 20\%$           | 11   | 0.370  | 1,000                    | 1,200 | 630                            | 700   | 100                             |

## ● 5050XA/5050XK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm 30\%$ ) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND5050XATR47NMG | NRS5030T R47NMGJ                   | RoHS | 0.47                             | $\pm 30\%$           | 185  | 0.010  | 9,000                    | 9,400 | 5,000                          | 5,900 | 100                             |
| LSXND5050XAT1R0NMG | NRS5030T 1R0NMGJ                   | RoHS | 1.0                              | $\pm 30\%$           | 110  | 0.015  | 6,600                    | 7,400 | 4,000                          | 4,900 | 100                             |
| LSXND5050XAT2R2NMG | NRS5030T 2R2NMGJ                   | RoHS | 2.2                              | $\pm 30\%$           | 46   | 0.023  | 4,200                    | 5,000 | 3,500                          | 4,100 | 100                             |
| LSXND5050XAT3R3NMG | NRS5030T 3R3NMGJ                   | RoHS | 3.3                              | $\pm 20\%$           | 36   | 0.030  | 3,600                    | 3,900 | 3,000                          | 3,600 | 100                             |
| LSXND5050XAT4R7MMG | NRS5030T 4R7MMGJ                   | RoHS | 4.7                              | $\pm 20\%$           | 31   | 0.035  | 3,100                    | 3,500 | 2,600                          | 3,000 | 100                             |
| LSXND5050XAT6R8MMG | NRS5030T 6R8MMGJ                   | RoHS | 6.8                              | $\pm 20\%$           | 22   | 0.052  | 2,500                    | 2,800 | 2,300                          | 2,500 | 100                             |
| LSXND5050XAT100MMG | NRS5030T 100MMGJ                   | RoHS | 10                               | $\pm 20\%$           | 20   | 0.070  | 2,100                    | 2,300 | 1,700                          | 2,000 | 100                             |
| LSXND5050XKT150MMG | NRS5030T 150MMGJ                   | RoHS | 15                               | $\pm 20\%$           | 14   | 0.125  | 1,600                    | 1,800 | 1,400                          | 1,550 | 100                             |
| LSXND5050XKT220MMG | NRS5030T 220MMGJ                   | RoHS | 22                               | $\pm 20\%$           | 13   | 0.180  | 1,400                    | 1,500 | 1,050                          | 1,200 | 100                             |
| LSXND5050XKT330MMG | NRS5030T 330MMGJ                   | RoHS | 33                               | $\pm 20\%$           | 10   | 0.225  | 1,150                    | 1,250 | 800                            | 950   | 100                             |
| LSXND5050XKT470MMG | NRS5030T 470MMGJ                   | RoHS | 47                               | $\pm 20\%$           | 9  | 0.325  | 950                      | 1,050 | 700                            | 800   | 100                             |

## ● 5050YA/5050YK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm 30\%$ ) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND5050YAL1R5NMG | NRS5040T 1R5NMGJ                   | RoHS | 1.5                              | $\pm 30\%$           | 60   | 0.017  | 6,400                    | 6,530 | 4,500                          | 4,730 | 100                             |
| LSXND5050YAL2R2NMG | NRS5040T 2R2NMGJ                   | RoHS | 2.2                              | $\pm 30\%$           | 42   | 0.022  | 5,000                    | 5,250 | 3,700                          | 4,080 | 100                             |
| LSXND5050YAL3R3NMG | NRS5040T 3R3NMGJ                   | RoHS | 3.3                              | $\pm 30\%$           | 32   | 0.027  | 4,000                    | 4,280 | 3,300                          | 3,770 | 100                             |
| LSXND5050YAL4R7NMG | NRS5040T 4R7NMGJ                   | RoHS | 4.7                              | $\pm 30\%$           | 28   | 0.029  | 3,300                    | 3,470 | 3,100                          | 3,500 | 100                             |
| LSXND5050YAL6R8MMG | NRS5040T 6R8MMGJ                   | RoHS | 6.8                              | $\pm 20\%$           | 21   | 0.049  | 2,800                    | 2,910 | 2,400                          | 2,470 | 100                             |
| LSXND5050YAL100MMG | NRS5040T 100MMGJ                   | RoHS | 10                               | $\pm 20\%$           | 18   | 0.056  | 2,300                    | 2,470 | 2,100                          | 2,210 | 100                             |
| LSXND5050YKL150MMG | NRS5040T 150MMGJ                   | RoHS | 15                               | $\pm 20\%$           | 13   | 0.080  | 2,000                    | 2,150 | 1,800                          | 1,920 | 100                             |
| LSXND5050YKL220MMG | NRS5040T 220MMGJ                   | RoHS | 22                               | $\pm 20\%$           | 9  | 0.126  | 1,500                    | 1,580 | 1,400                          | 1,470 | 100                             |
| LSXND5050YKL330MMG | NRS5040T 330MMGJ                   | RoHS | 33                               | $\pm 20\%$           | 7  | 0.180  | 1,300                    | 1,390 | 1,200                          | 1,270 | 100                             |
| LSXND5050YKL470MMG | NRS5040T 470MMGJ                   | RoHS | 47                               | $\pm 20\%$           | 6  | 0.310  | 1,100                    | 1,150 | 900                            | 950   | 100                             |

## ● 6060KK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm 20\%$ ) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND6060KKT1R5MMG | NRS6010T 1R5MMGF                   | RoHS | 1.5                              | $\pm 20\%$           | 77   | 0.090  | 2,400                    | 2,650 | 1,900                          | 2,150 | 100                             |
| LSXND6060KKT2R2MMG | NRS6010T 2R2MMGF                   | RoHS | 2.2                              | $\pm 20\%$           | 56   | 0.110  | 1,900                    | 2,120 | 1,700                          | 1,950 | 100                             |
| LSXND6060KKT3R3MMG | NRS6010T 3R3MMGF                   | RoHS | 3.3                              | $\pm 20\%$           | 42   | 0.135  | 1,600                    | 1,750 | 1,500                          | 1,750 | 100                             |
| LSXND6060KKT4R7MMG | NRS6010T 4R7MMGF                   | RoHS | 4.7                              | $\pm 20\%$           | 36   | 0.165  | 1,300                    | 1,470 | 1,400                          | 1,600 | 100                             |
| LSXND6060KKT6R8MMG | NRS6010T 6R8MMGF                   | RoHS | 6.8                              | $\pm 20\%$           | 30   | 0.220  | 1,200                    | 1,300 | 1,200                          | 1,320 | 100                             |
| LSXND6060KKT100MMG | NRS6010T 100MMGF                   | RoHS | 10                               | $\pm 20\%$           | 25   | 0.270  | 1,000                    | 1,100 | 1,100                          | 1,200 | 100                             |
| LSXND6060KKT220MMG | NRS6010T 220MMGF                   | RoHS | 22                               | $\pm 20\%$           | 12   | 0.580  | 650                      | 720   | 700                            | 740   | 100                             |

## ● 6060MK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm 20\%$ ) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND6060MKT1R0NMG | NRS6012T 1R0NMGJ                   | RoHS | 1.0                              | $\pm 30\%$           | 95   | 0.050  | 3,000                    | 3,900 | 2,400                          | 2,700 | 100                             |
| LSXND6060MKT1R5NMG | NRS6012T 1R5NMGJ                   | RoHS | 1.5                              | $\pm 30\%$           | 69   | 0.067  | 2,600                    | 3,500 | 2,100                          | 2,300 | 100                             |
| LSXND6060MKT2R5NMG | NRS6012T 2R5NMGJ                   | RoHS | 2.5                              | $\pm 30\%$           | 45   | 0.090  | 2,100                    | 2,900 | 1,800                          | 2,100 | 100                             |
| LSXND6060MKT3R3NMG | NRS6012T 3R3NMGJ                   | RoHS | 3.3                              | $\pm 30\%$           | 42   | 0.105  | 1,800                    | 2,500 | 1,700                          | 1,950 | 100                             |
| LSXND6060MKT4R7MMG | NRS6012T 4R7MMGJ                   | RoHS | 4.7                              | $\pm 20\%$           | 36   | 0.125  | 1,600                    | 2,100 | 1,550                          | 1,750 | 100                             |
| LSXND6060MKT5R3MMG | NRS6012T 5R3MMGJ                   | RoHS | 5.3                              | $\pm 20\%$           | 34   | 0.125  | 1,500                    | 1,750 | 1,550                          | 1,750 | 100                             |
| LSXND6060MKT6R8MMG | NRS6012T 6R8MMGJ                   | RoHS | 6.8                              | $\pm 20\%$           | 30   | 0.165  | 1,300                    | 1,600 | 1,350                          | 1,600 | 100                             |
| LSXND6060MKT100MMG | NRS6012T 100MMGJ                   | RoHS | 10                               | $\pm 20\%$           | 22   | 0.200  | 1,000                    | 1,400 | 1,200                          | 1,380 | 100                             |
| LSXND6060MKT150MMG | NRS6012T 150MMGJ                   | RoHS | 15                               | $\pm 20\%$           | 18   | 0.295  | 800                      | 1,100 | 800                            | 950   | 100                             |
| LSXND6060MKT220MMG | NRS6012T 220MMGJ                   | RoHS | 22                               | $\pm 20\%$           | 12   | 0.465  | 760                      | 900   | 650                            | 750   | 100                             |
| LSXND6060MKT330MMG | NRS6012T 330MMGJ                   | RoHS | 33                               | $\pm 20\%$           | 8  | 0.580  | 590                      | 800   | 550                            | 670   | 100                             |
| LSXND6060MKT470MMG | NRS6012T 470MMGJ                   | RoHS | 47                               | $\pm 20\%$           | 6  | 0.965  | 520                      | 630   | 460                            | 540   | 100                             |
| LSXND6060MKT680MMG | NRS6012T 680MMGJ                   | RoHS | 68                               | $\pm 20\%$           | 3  | 1.16   | 440                      | 560   | 410                            | 450   | 100                             |
| LSXND6060MKT101MMG | NRS6012T 101MMGJ                   | RoHS | 100                              | $\pm 20\%$           | 1  | 1.67   | 350                      | 490   | 320                            | 380   | 100                             |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 6060PK type

| New part number     | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                     |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                     |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND6060PKT1R2NMGG | NRS6014T 1R2NMGG                   | RoHS | 1.2                        | ±30%                 | 77   | 0.042                       | 4,000                    | 4,400 | 2,750                          | 3,200 | 100                             |
| LSXND6060PKT2R2NMGG | NRS6014T 2R2NMGG                   | RoHS | 2.2                        | ±30%                 | 61   | 0.055                       | 3,000                    | 3,500 | 2,300                          | 2,600 | 100                             |
| LSXND6060PKT3R3NMGG | NRS6014T 3R3NMGG                   | RoHS | 3.3                        | ±30%                 | 41   | 0.075                       | 2,500                    | 2,600 | 2,000                          | 2,200 | 100                             |
| LSXND6060PKT4R7MMGG | NRS6014T 4R7MMGG                   | RoHS | 4.7                        | ±20%                 | 36   | 0.090                       | 2,000                    | 2,170 | 1,900                          | 1,950 | 100                             |
| LSXND6060PKT6R8MMGG | NRS6014T 6R8MMGG                   | RoHS | 6.8                        | ±20%                 | 30   | 0.115                       | 1,700                    | 1,880 | 1,650                          | 1,700 | 100                             |
| LSXND6060PKT100MMGG | NRS6014T 100MMGG                   | RoHS | 10                         | ±20%                 | 24   | 0.140                       | 1,400                    | 1,540 | 1,400                          | 1,500 | 100                             |
| LSXND6060PKT150MMGG | NRS6014T 150MMGG                   | RoHS | 15                         | ±20%                 | 20   | 0.210                       | 1,150                    | 1,300 | 1,200                          | 1,280 | 100                             |
| LSXND6060PKT220MMGG | NRS6014T 220MMGG                   | RoHS | 22                         | ±20%                 | 16   | 0.300                       | 950                      | 1,100 | 1,000                          | 1,090 | 100                             |

● 6060WK type

| New part number     | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±20%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                     |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                     |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND6060WKL0R8NMGG | NRS6020T 0R8NMGG                   | RoHS | 0.8                        | ±30%                 | 110  | 0.020                       | 6,400                    | 7,400 | 4,100                          | 4,800 | 100                             |
| LSXND6060WKL1R5NMGG | NRS6020T 1R5NMGG                   | RoHS | 1.5                        | ±30%                 | 93   | 0.026                       | 4,300                    | 5,300 | 3,600                          | 4,200 | 100                             |
| LSXND6060WKL2R2NMGG | NRS6020T 2R2NMGG                   | RoHS | 2.2                        | ±30%                 | 73   | 0.034                       | 3,200                    | 4,000 | 2,900                          | 3,400 | 100                             |
| LSXND6060WKL3R3NMGG | NRS6020T 3R3NMGG                   | RoHS | 3.3                        | ±30%                 | 55   | 0.040                       | 2,800                    | 3,400 | 2,750                          | 3,100 | 100                             |
| LSXND6060WKL4R7NMGG | NRS6020T 4R7NMGG                   | RoHS | 4.7                        | ±30%                 | 43   | 0.058                       | 2,400                    | 2,800 | 2,150                          | 2,500 | 100                             |
| LSXND6060WKL6R8NMGG | NRS6020T 6R8NMGG                   | RoHS | 6.8                        | ±30%                 | 30   | 0.085                       | 2,000                    | 2,600 | 1,800                          | 2,100 | 100                             |
| LSXND6060WKL100MMGG | NRS6020T 100MMGG                   | RoHS | 10                         | ±20%                 | 18   | 0.125                       | 1,900                    | 2,240 | 1,500                          | 1,700 | 100                             |
| LSXND6060WKL220MMGG | NRS6020T 220MMGG                   | RoHS | 22                         | ±20%                 | 11   | 0.290                       | 1,250                    | 1,470 | 950                            | 1,100 | 100                             |

● 6060WH type

| New part number     | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±30%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                     |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                     |                                    |      |                            |                      |  |                             | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXND6060WHL0R9NMGG | NRS6028T 0R9NMGG                   | RoHS | 0.9                        | ±30%                 | 90   | 0.013                       | 6,700                    | 7,900 | 4,600                          | 5,200 | 100                             |
| LSXND6060WHL1R5NMGG | NRS6028T 1R5NMGG                   | RoHS | 1.5                        | ±30%                 | 78   | 0.016                       | 5,100                    | 6,100 | 4,200                          | 4,700 | 100                             |
| LSXND6060WHL2R2NMGG | NRS6028T 2R2NMGG                   | RoHS | 2.2                        | ±30%                 | 68   | 0.020                       | 4,200                    | 5,100 | 3,700                          | 4,200 | 100                             |
| LSXND6060WHL3R0NMGG | NRS6028T 3R0NMGG                   | RoHS | 3.0                        | ±30%                 | 55   | 0.023                       | 3,600                    | 4,300 | 3,400                          | 3,900 | 100                             |
| LSXND6060WHL4R7MMGG | NRS6028T 4R7MMGG                   | RoHS | 4.7                        | ±20%                 | 39   | 0.031                       | 2,700                    | 3,300 | 3,000                          | 3,400 | 100                             |
| LSXND6060WHL6R8MMGG | NRS6028T 6R8MMGG                   | RoHS | 6.8                        | ±20%                 | 25   | 0.043                       | 2,600                    | 3,000 | 2,500                          | 2,900 | 100                             |
| LSXND6060WHL100MMGG | NRS6028T 100MMGG                   | RoHS | 10                         | ±20%                 | 20   | 0.065                       | 1,900                    | 2,200 | 1,900                          | 2,200 | 100                             |
| LSXND6060WHL150MMGG | NRS6028T 150MMGG                   | RoHS | 15                         | ±20%                 | 17   | 0.095                       | 1,600                    | 1,900 | 1,800                          | 1,900 | 100                             |
| LSXND6060WHL220MMGG | NRS6028T 220MMGG                   | RoHS | 22                         | ±20%                 | 12   | 0.135                       | 1,300                    | 1,600 | 1,400                          | 1,600 | 100                             |
| LSXND6060WHL330MMGG | NRS6028T 330MMGG                   | RoHS | 33                         | ±20%                 | 10   | 0.220                       | 1,100                    | 1,300 | 1,100                          | 1,250 | 100                             |
| LSXND6060WHL470MMGG | NRS6028T 470MMGG                   | RoHS | 47                         | ±20%                 | 8  | 0.300                       | 1,000                    | 1,150 | 920                            | 1,050 | 100                             |
| LSXND6060WHL680MMGG | NRS6028T 680MMGG                   | RoHS | 68                         | ±20%                 | 5  | 0.420                       | 800                      | 950   | 770                            | 880   | 100                             |
| LSXND6060WHL101MMGG | NRS6028T 101MMGG                   | RoHS | 100                        | ±20%                 | 3  | 0.600                       | 650                      | 750   | 660                            | 750   | 100                             |

● 6060YE type

| New part number     | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[Ω] (±30%) | Rated current ※) [mA]    |        |                                |       | Measuring<br>frequency<br>[kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|--------|--------------------------------|-------|---------------------------------|
|                     |                                    |      |                            |                      |  |                             | Saturation current: Idc1 |        | Temperature rise current: Idc2 |       |                                 |
|                     |                                    |      |                            |                      |  |                             | Max.                     | Typ.   | Max.                           | Typ.  |                                 |
| LSXND6060YEL1R0NMGG | NRS6045T 1R0NMGG                   | RoHS | 1.0                        | ±30%                 | 110  | 0.014                       | 9,800                    | 11,000 | 4,500                          | 5,200 | 100                             |
| LSXND6060YEL1R3NMGG | NRS6045T 1R3NMGG                   | RoHS | 1.3                        | ±30%                 | 95   | 0.016                       | 8,200                    | 9,300  | 4,200                          | 4,800 | 100                             |
| LSXND6060YEL1R5NMGG | NRS6045T 1R5NMGG                   | RoHS | 1.5                        | ±30%                 | 95   | 0.016                       | 8,200                    | 9,300  | 4,200                          | 4,800 | 100                             |
| LSXND6060YEL1R8NMGG | NRS6045T 1R8NMGG                   | RoHS | 1.8                        | ±30%                 | 80   | 0.019                       | 7,200                    | 8,100  | 3,900                          | 4,400 | 100                             |
| LSXND6060YEL2R2NMGG | NRS6045T 2R2NMGG                   | RoHS | 2.2                        | ±30%                 | 60   | 0.022                       | 6,400                    | 7,300  | 3,600                          | 4,100 | 100                             |
| LSXND6060YEL2R3NMGG | NRS6045T 2R3NMGG                   | RoHS | 2.3                        | ±30%                 | 60   | 0.022                       | 6,400                    | 7,300  | 3,600                          | 4,100 | 100                             |
| LSXND6060YEL3R0NMGG | NRS6045T 3R0NMGG                   | RoHS | 3.0                        | ±30%                 | 45   | 0.024                       | 5,600                    | 6,500  | 3,300                          | 4,000 | 100                             |
| LSXND6060YEL3R3NMGG | NRS6045T 3R3NMGG                   | RoHS | 3.3                        | ±30%                 | 45   | 0.024                       | 5,600                    | 6,500  | 3,300                          | 4,000 | 100                             |
| LSXND6060YEL4R5MMGG | NRS6045T 4R5MMGG                   | RoHS | 4.5                        | ±20%                 | 25   | 0.030                       | 4,400                    | 5,400  | 3,100                          | 3,600 | 100                             |
| LSXND6060YEL4R7NMGG | NRS6045T 4R7MMGG                   | RoHS | 4.7                        | ±30%                 | 25   | 0.030                       | 4,400                    | 5,400  | 3,100                          | 3,600 | 100                             |
| LSXND6060YEL6R3MMGG | NRS6045T 6R3MMGG                   | RoHS | 6.3                        | ±20%                 | 15   | 0.036                       | 3,600                    | 4,300  | 3,000                          | 3,300 | 100                             |
| LSXND6060YEL6R8MMGG | NRS6045T 6R8MMGG                   | RoHS | 6.8                        | ±20%                 | 15   | 0.036                       | 3,600                    | 4,300  | 3,000                          | 3,300 | 100                             |
| LSXND6060YEL100MMGG | NRS6045T 100MMGG                   | RoHS | 10                         | ±20%                 | 12   | 0.046                       | 3,100                    | 3,600  | 2,400                          | 2,800 | 100                             |
| LSXND6060YEL150MMGG | NRS6045T 150MMGG                   | RoHS | 15                         | ±20%                 | 10   | 0.070                       | 2,500                    | 3,000  | 1,900                          | 2,300 | 100                             |
| LSXND6060YEL220MMGG | NRS6045T 220MMGG                   | RoHS | 22                         | ±20%                 | 7  | 0.107                       | 2,000                    | 2,400  | 1,600                          | 1,900 | 100                             |
| LSXND6060YEL330MMGG | NRS6045T 330MMGG                   | RoHS | 33                         | ±20%                 | 6  | 0.141                       | 1,650                    | 2,000  | 1,400                          | 1,600 | 100                             |
| LSXND6060YEL470MMGG | NRS6045T 470MMGG                   | RoHS | 47                         | ±20%                 | 5  | 0.211                       | 1,400                    | 1,600  | 1,150                          | 1,350 | 100                             |
| LSXND6060YEL680MMGG | NRS6045T 680MMGG                   | RoHS | 68                         | ±20%                 | 4  | 0.304                       | 1,100                    | 1,300  | 950                            | 1,100 | 100                             |
| LSXND6060YEL101MMGG | NRS6045T 101MMGG                   | RoHS | 100                        | ±20%                 | 3  | 0.466                       | 900                      | 1,200  | 750                            | 900   | 100                             |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)  
 ※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)  
 ※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

## PART NUMBER

## 8080XK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm$ 30%) | Rated current ※) [mA]    |       |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|-------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |       | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.  | Max.                           | Typ.  |                                 |
| LSXNH8080XKL1R0NJG | NRS8030T 1R0NJGJ                   | RoHS | 1.0                              | $\pm$ 30%            | 120  | 0.009                                      | 7,800                    | 9,300 | 6,200                          | 7,600 | 100                             |
| LSXNH8080XKL1R5NJG | NRS8030T 1R5NJGJ                   | RoHS | 1.5                              | $\pm$ 30%            | 80   | 0.012                                      | 6,200                    | 7,800 | 5,300                          | 6,400 | 100                             |
| LSXNH8080XKL2R2NJG | NRS8030T 2R2NJGJ                   | RoHS | 2.2                              | $\pm$ 30%            | 60   | 0.015                                      | 4,900                    | 6,100 | 4,800                          | 5,600 | 100                             |
| LSXNH8080XKL3R3MJG | NRS8030T 3R3MJGJ                   | RoHS | 3.3                              | $\pm$ 20%            | 50   | 0.019                                      | 4,200                    | 5,200 | 4,300                          | 5,100 | 100                             |
| LSXNH8080XKL4R7MJG | NRS8030T 4R7MJGJ                   | RoHS | 4.7                              | $\pm$ 20%            | 40   | 0.022                                      | 3,600                    | 4,400 | 4,000                          | 4,700 | 100                             |
| LSXNH8080XKL6R8MJG | NRS8030T 6R8MJGJ                   | RoHS | 6.8                              | $\pm$ 20%            | 32   | 0.029                                      | 3,000                    | 3,600 | 3,400                          | 4,000 | 100                             |
| LSXNH8080XKL100MJG | NRS8030T 100MJGJ                   | RoHS | 10                               | $\pm$ 20%            | 27   | 0.033                                      | 2,400                    | 2,900 | 3,000                          | 3,600 | 100                             |
| LSXNH8080XKL150MJG | NRS8030T 150MJGJ                   | RoHS | 15                               | $\pm$ 20%            | 20   | 0.060                                      | 2,000                    | 2,300 | 2,200                          | 2,600 | 100                             |
| LSXNH8080XKL220MJG | NRS8030T 220MJGJ                   | RoHS | 22                               | $\pm$ 20%            | 16   | 0.070                                      | 1,750                    | 2,200 | 1,900                          | 2,300 | 100                             |
| LSXNH8080XKL330MJG | NRS8030T 330MJGJ                   | RoHS | 33                               | $\pm$ 20%            | 13   | 0.120                                      | 1,300                    | 1,600 | 1,500                          | 1,800 | 100                             |
| LSXNH8080XKL470MJG | NRS8030T 470MJGJ                   | RoHS | 47                               | $\pm$ 20%            | 11   | 0.170                                      | 1,100                    | 1,400 | 1,300                          | 1,500 | 100                             |

## 8080YB/8080YK type

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | Self-resonant<br>frequency<br>[MHz] (min.) | DC Resistance<br>[ $\Omega$ ] ( $\pm$ 30%) | Rated current ※) [mA]    |        |                                |       | Measuring<br>frequency<br>[kHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|--------------------------|--------|--------------------------------|-------|---------------------------------|
|                    |                                    |      |                                  |                      |  |  | Saturation current: Idc1 |        | Temperature rise current: Idc2 |       |                                 |
|                    |                                    |      |                                  |                      |  |  | Max.                     | Typ.   | Max.                           | Typ.  |                                 |
| LSXNH8080YBL0R9NJG | NRS8040T 0R9NJGJ                   | RoHS | 0.9                              | $\pm$ 30%            | 85   | 0.006                                      | 13,000                   | 14,000 | 7,800                          | 9,600 | 100                             |
| LSXNH8080YBL1R0NJG | NRS8040T 1R0NJGJ                   | RoHS | 1                                | $\pm$ 30%            | 85   | 0.006                                      | 13,000                   | 14,000 | 7,800                          | 9,600 | 100                             |
| LSXNH8080YBL1R4NJG | NRS8040T 1R4NJGJ                   | RoHS | 1.4                              | $\pm$ 30%            | 63   | 0.007                                      | 10,000                   | 11,000 | 7,000                          | 8,400 | 100                             |
| LSXNH8080YBL1R5NJG | NRS8040T 1R5NJGJ                   | RoHS | 1.5                              | $\pm$ 30%            | 63   | 0.007                                      | 10,000                   | 11,000 | 7,000                          | 8,400 | 100                             |
| LSXNH8080YBL2R0NJG | NRS8040T 2R0NJGJ                   | RoHS | 2.0                              | $\pm$ 30%            | 50   | 0.009                                      | 8,100                    | 9,200  | 6,300                          | 7,600 | 100                             |
| LSXNH8080YBL2R2NJG | NRS8040T 2R2NJGJ                   | RoHS | 2.2                              | $\pm$ 30%            | 50   | 0.009                                      | 8,100                    | 9,200  | 6,300                          | 7,600 | 100                             |
| LSXNH8080YBL3R3NJG | NRS8040T 3R3NJGJ                   | RoHS | 3.3                              | $\pm$ 30%            | 34   | 0.015                                      | 6,400                    | 6,800  | 4,900                          | 6,000 | 100                             |
| LSXNH8080YBL3R6NJG | NRS8040T 3R6NJGJ                   | RoHS | 3.6                              | $\pm$ 30%            | 34   | 0.015                                      | 6,400                    | 6,800  | 4,900                          | 6,000 | 100                             |
| LSXNH8080YBL4R7NJG | NRS8040T 4R7NJGJ                   | RoHS | 4.7                              | $\pm$ 30%            | 30   | 0.018                                      | 5,400                    | 5,900  | 4,100                          | 5,200 | 100                             |
| LSXNH8080YBL6R8NJG | NRS8040T 6R8NJGJ                   | RoHS | 6.8                              | $\pm$ 30%            | 24   | 0.025                                      | 4,400                    | 4,800  | 3,700                          | 4,400 | 100                             |
| LSXNH8080YKL100MJG | NRS8040T 100MJGJ                   | RoHS | 10                               | $\pm$ 20%            | 22   | 0.034                                      | 3,800                    | 4,100  | 3,100                          | 3,500 | 100                             |
| LSXNH8080YKL150MJG | NRS8040T 150MJGJ                   | RoHS | 15                               | $\pm$ 20%            | 16   | 0.050                                      | 2,900                    | 3,200  | 2,400                          | 3,000 | 100                             |
| LSXNH8080YKL220MJG | NRS8040T 220MJGJ                   | RoHS | 22                               | $\pm$ 20%            | 13   | 0.066                                      | 2,400                    | 2,700  | 2,200                          | 2,600 | 100                             |
| LSXNH8080YKL330MJG | NRS8040T 330MJGJ                   | RoHS | 33                               | $\pm$ 20%            | 12   | 0.100                                      | 2,000                    | 2,300  | 1,700                          | 1,900 | 100                             |
| LSXNH8080YKL470MJG | NRS8040T 470MJGJ                   | RoHS | 47                               | $\pm$ 20%            | 8  | 0.140                                      | 1,500                    | 1,800  | 1,500                          | 1,600 | 100                             |
| LSXNH8080YKL680MJG | NRS8040T 680MJGJ                   | RoHS | 68                               | $\pm$ 20%            | 7  | 0.210                                      | 1,300                    | 1,500  | 1,200                          | 1,300 | 100                             |
| LSXNH8080YKL101MJG | NRS8040T 101MJGJ                   | RoHS | 100                              | $\pm$ 20%            | 6  | 0.280                                      | 1,100                    | 1,300  | 1,000                          | 1,100 | 100                             |
| LSXNH8080YKL151MJG | NRS8040T 151MJGJ                   | RoHS | 150                              | $\pm$ 20%            | 5  | 0.420                                      | 900                      | 980    | 800                            | 890   | 100                             |
| LSXNH8080YKL221MJG | NRS8040T 221MJGJ                   | RoHS | 220                              | $\pm$ 20%            | 4  | 0.620                                      | 700                      | 800    | 670                            | 740   | 100                             |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

Wire-wound Ferrite Power Inductors LSXN/LSXP/LCXN/LCXP/LBXN/LBXP/  
 LLXN/LLXP/LMXN/LMXP series  
 Wire-wound Ferrite Power Inductors LAXH/LCXH/LBXH/LMXH series  
 Wire-wound Ferrite Inductors for Class D Amplifier LCXA

■ PACKAGING


① Minimum Quantity

| Type   | Standard Quantity [pcs] |
|--------|-------------------------|
|        | Tape & Reel             |
| 2020KK | 2500                    |
| 2020MK | 2500                    |
| 2424KK | 2500                    |
| 2424MK | 2500                    |
| 3030KK | 2000                    |
| 3030MK | 2000                    |
| 3030QK | 2000                    |
| 4040KK | 5000                    |
| 4040MK | 4500                    |
| 4040TK | 3500                    |
| 4040WK | 700                     |

| Type   | Standard Quantity [pcs] |
|--------|-------------------------|
|        | Tape & Reel             |
| 5050KK | 1000                    |
| 5050MK | 1000                    |
| 5050PK | 1000                    |
| 5050WB | 800                     |
| 5050WK | 800                     |
| 5050WD | 2500                    |
| 5050WE | 2500                    |
| 5050XK | 500                     |
| 5050XA | 500                     |
| 5050YA | 1500                    |
| 5050YK | 1500                    |
| 6060KK | 1000                    |
| 6060MK | 1000                    |
| 6060PK | 1000                    |
| 6060WK | 2500                    |
| 6060WH | 2000                    |
| 6060XK | 2000                    |
| 6060YE | 1500                    |
| 8080XK | 1000                    |
| 8080YK | 1000                    |
| 8080YB | 1000                    |


② Tape Material

● Embossed Tape

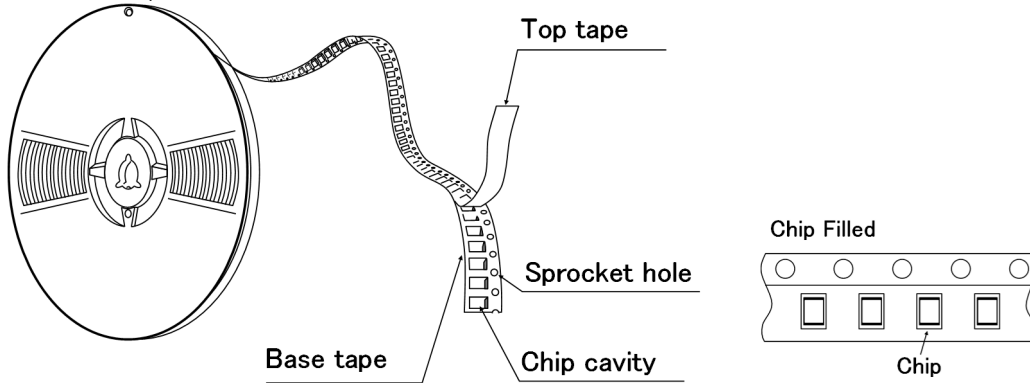

③ Taping dimensions

● Embossed tape 8mm wide (0.315 inches wide)

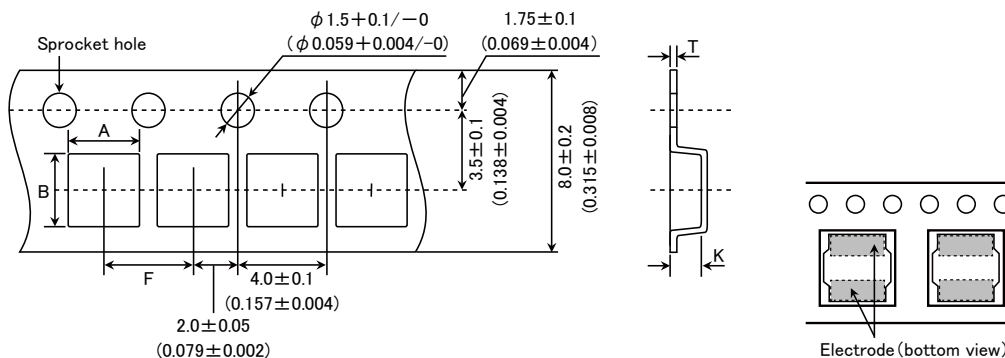


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type             | Chip cavity              |                          | Insertion pitch          | Tape thickness             |                          |
|------------------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|
|                  | A                        | B                        |                          | T                          | K                        |
| 2020KK<br>2020MK | 2.2±0.1<br>(0.102±0.004) | 2.2±0.1<br>(0.102±0.004) | 4.0±0.1<br>(0.157±0.004) | 0.25±0.05<br>(0.009±0.002) | 1.3±0.1<br>(0.051±0.004) |
| 2424KK<br>2424MK | 2.6±0.1<br>(0.087±0.004) | 2.6±0.1<br>(0.102±0.004) |                          | 0.25±0.05<br>(0.009±0.002) | 1.3±0.1<br>(0.051±0.004) |
| 3030KK           | 3.2±0.1<br>(0.126±0.004) | 3.2±0.1<br>(0.126±0.004) |                          | 0.3±0.05<br>(0.012±0.002)  | 1.4±0.1<br>(0.055±0.004) |
| 3030MK           |                          |                          |                          |                            | 1.6±0.1<br>(0.063±0.004) |
| 3030QK           |                          |                          |                          |                            | 1.9±0.1<br>(0.075±0.004) |

Unit: mm (inch)

● Embossed tape 12mm wide (0.47 inches wide)

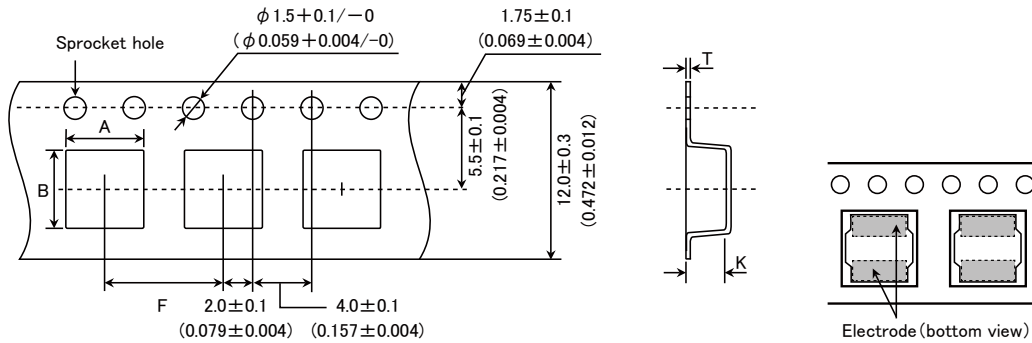


| Type             | Chip cavity               |                           | Insertion pitch          | Tape thickness           |                          |
|------------------|---------------------------|---------------------------|--------------------------|--------------------------|--------------------------|
|                  | A                         | B                         |                          | T                        | K                        |
| 4040KK           | 4.3±0.1<br>(0.169±0.004)  | 4.3±0.1<br>(0.169±0.004)  | 8.0±0.1<br>(0.315±0.004) | 0.3±0.1<br>(0.012±0.004) | 1.4±0.1<br>(0.055±0.004) |
| 4040MK           |                           |                           |                          |                          | 1.6±0.1<br>(0.063±0.004) |
| 4040TK<br>4040WK |                           |                           |                          |                          | 2.1±0.1<br>(0.083±0.004) |
| 5050KK           | 1.4±0.1<br>(0.055±0.004)  |                           |                          |                          |                          |
| 5050MK           | 1.4±0.1<br>(0.055±0.004)  |                           |                          |                          |                          |
| 5050PK           | 1.6±0.1<br>(0.063±0.004)  |                           |                          |                          |                          |
| 5050WB<br>5050WK | 2.3±0.1<br>(0.091±0.004)  |                           |                          |                          |                          |
| 5050WD<br>5050WE | 2.7±0.1<br>(0.106±0.004)  |                           |                          |                          |                          |
| 5050XK<br>5050XA | 5.15±0.1<br>(0.203±0.004) | 5.15±0.1<br>(0.203±0.004) |                          | 0.4±0.1<br>(0.016±0.004) | 3.2±0.1<br>(0.126±0.004) |
| 5050YK<br>5050YA | 5.15±0.1<br>(0.203±0.004) | 5.15±0.1<br>(0.203±0.004) |                          |                          | 4.2±0.1<br>(0.165±0.004) |
| 6060KK           | 6.3±0.1<br>(0.248±0.004)  | 6.3±0.1<br>(0.248±0.004)  | 1.4±0.1<br>(0.055±0.004) |                          |                          |
| 6060MK           |                           |                           | 1.6±0.1<br>(0.063±0.004) |                          |                          |
| 6060PK           |                           |                           | 1.6±0.1<br>(0.063±0.004) |                          |                          |
| 6060WK           |                           |                           | 2.3±0.1<br>(0.090±0.004) |                          |                          |
| 6060WH<br>6060XK |                           |                           | 3.1±0.1<br>(0.122±0.004) |                          |                          |
| 6060YE           |                           |                           | 4.7±0.1<br>(0.185±0.004) |                          |                          |

Unit: mm (inch)

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


● Embossed tape 16mm wide (0.63 inches wide)

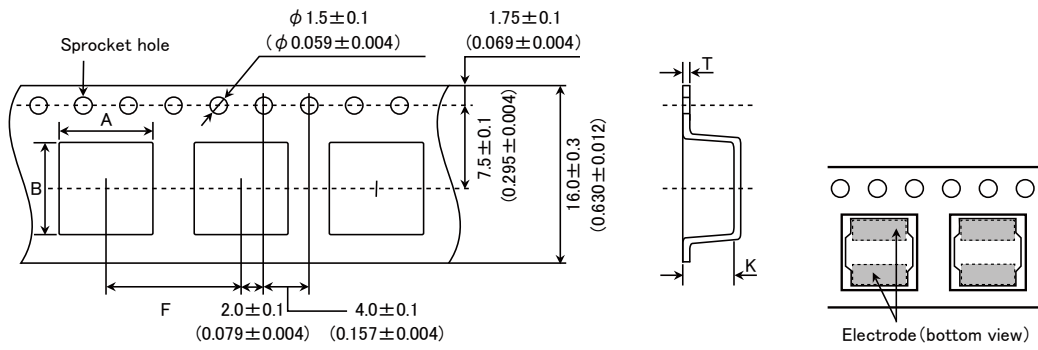


| Type   | Chip cavity                            |  | Insertion pitch<br>F                    | Tape thickness                         |  |
|--------|--|--|---|--|--|
|        | A                                      | B                                      |   | T                                      | K                                      |
| 8080XK | $8.3 \pm 0.1$<br>( $0.327 \pm 0.004$ ) | $8.3 \pm 0.1$<br>( $0.327 \pm 0.004$ ) | $12.0 \pm 0.1$<br>( $0.472 \pm 0.004$ ) | $0.5 \pm 0.1$<br>( $0.020 \pm 0.004$ ) | $3.4 \pm 0.1$<br>( $0.134 \pm 0.004$ ) |
| 8080YK |  |  |   |  | $4.5 \pm 0.1$<br>( $0.177 \pm 0.004$ ) |
| 8080YB |  |  |   |  | $4.5 \pm 0.1$<br>( $0.177 \pm 0.004$ ) |

Unit: mm (inch)

④ Leader and Blank portion

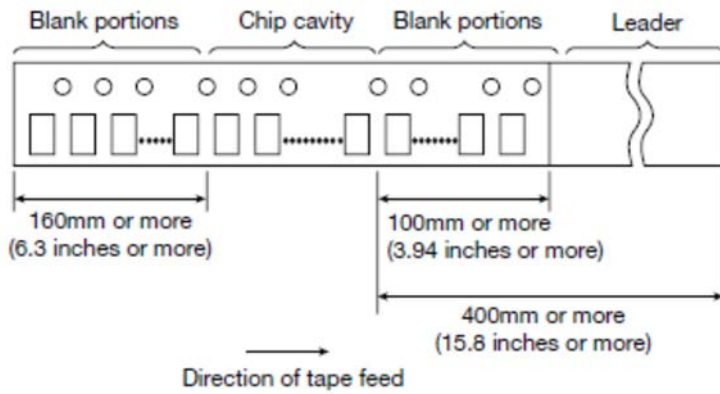


⑤ Reel size

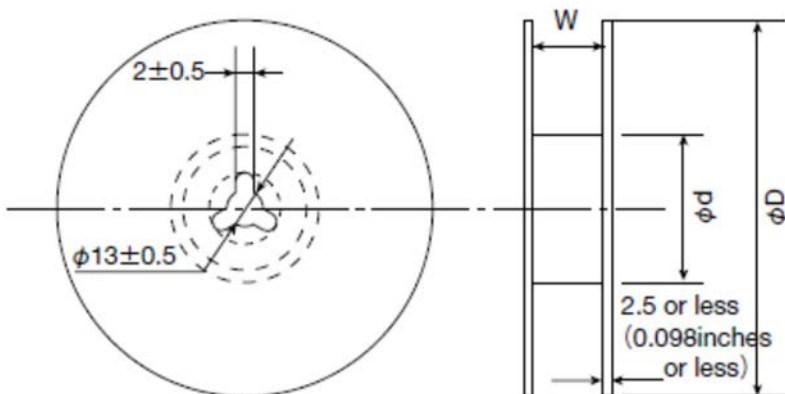

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type   | Reel size (Reference values) |                       |                           |
|--------|------------------------------|-----------------------|---------------------------|
|        | $\phi D$                     | $\phi d$              | W                         |
| 2020KK | 180±0.5<br>(7.087±0.019)     | 60±1.0<br>(2.36±0.04) | 10.0±1.5<br>(0.394±0.059) |
| 2020MK |                              |                       |                           |
| 2424KK |                              |                       |                           |
| 2424MK |                              |                       |                           |
| 3030KK |                              |                       |                           |
| 3030MK |                              |                       |                           |
| 3030QK |                              |                       |                           |
| 4040WK | 180±3.0<br>(7.087±0.118)     | 60±2.0<br>(2.36±0.08) | 14.0±1.5<br>(0.551±0.059) |
| 5050KK |                              |                       |                           |
| 5050MK |                              |                       |                           |
| 5050PK |                              |                       |                           |
| 5050WB |                              |                       |                           |
| 5050WK |                              |                       |                           |
| 5050XK |                              |                       |                           |
| 5050XA |                              |                       |                           |
| 6060KK |                              |                       |                           |
| 6060MK |                              |                       |                           |
| 6060PK |                              |                       |                           |

Unit: mm (inch)

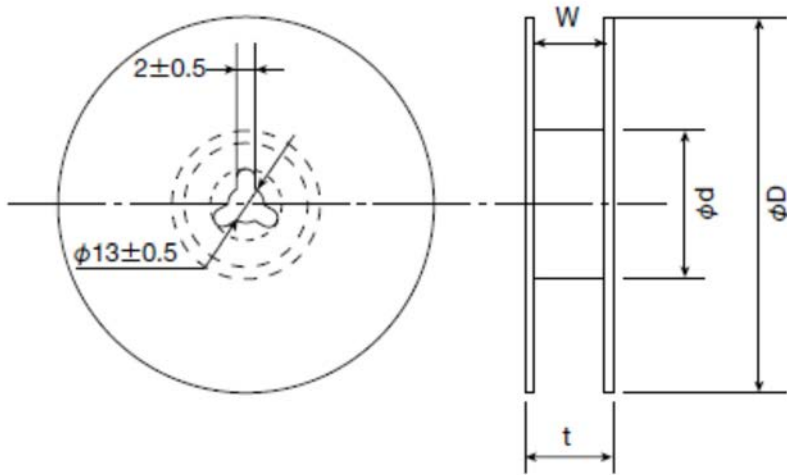


| Type   | Reel size (Reference values) |                        |                |                          |
|--------|------------------------------|------------------------|----------------|--------------------------|
|        | $\phi D$                     | $\phi d$               | t (max.)       | W                        |
| 4040KK | 330±3.0<br>(12.99±0.118)     | 80±2.0<br>(3.15±0.078) | 18.5<br>(0.72) | 13.5±1.0<br>(0.531±0.04) |
| 4040MK |                              |                        |                |                          |
| 4040TK |                              |                        |                |                          |
| 5050WD |                              |                        |                |                          |
| 5050WE |                              |                        |                |                          |
| 5050YA |                              |                        |                |                          |
| 5050YK |                              |                        |                |                          |
| 6060WK |                              |                        |                |                          |
| 6060WH |                              |                        |                |                          |
| 6060XK |                              |                        |                |                          |
| 6060YE |                              |                        |                |                          |
| 8080XK |                              |                        | 22.5<br>(0.89) | 17.5±1.0<br>(0.689±0.04) |
| 8080YK |                              |                        |                |                          |
| 8080YB |                              |                        |                |                          |
| 8080YB |                              |                        |                |                          |

Unit: mm (inch)

### ⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.

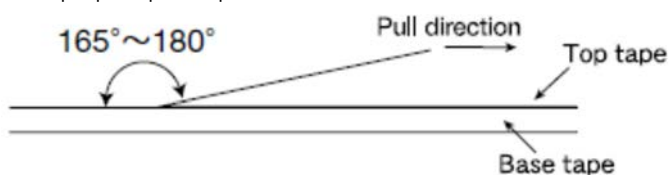

**Wire-wound Ferrite Power Inductors LSXN/LSXP series  
for General Electronic Equipment for Consumer**  
**Wire-wound Ferrite Power Inductors LLXN/LLXP series  
for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)**


■ RELIABILITY DATA


| 1. Operating Temperature Range |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
|--------------------------------|--|------|------------------|---|----|---|-------------------------------|---|---------------------------|---|-------------------------------|---|----|
| Specified Value                | -25~+120°C (LSXN: 2020~3030 type, LSXP: 2020~3030 type)<br>-25~+125°C (LSXN: 4040~8080 type)<br>-25~+120°C (LLXN: 2020~3030 type, LLXP: 2020~3030 type)<br>-25~+125°C (LLXN: 4040~8080 type)   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | Including self-generated heat  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 2. Storage Temperature Range   |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | -40~+85°C  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | -5 to 40°C for the product with taping.  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 3. Rated current               |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | Within the specified tolerance   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 4. Inductance                  |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | Within the specified tolerance   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | Measuring equipment : LCR Meter (HP 4285A or equivalent)<br>Measuring frequency : 100kHz, 1V   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 5. DC Resistance               |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | Within the specified tolerance   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent)   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 6. Self resonance frequency    |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | Within the specified tolerance   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | Measuring equipment : Impedance analyzer/material analyzer (HP4291A or equivalent HP4191A, 4192A or equivalent)  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 7. Temperature characteristic  |  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Specified Value                | Inductance change : Within $\pm 20\%$  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| Test Methods and Remarks       | Measurement of inductance shall be taken at temperature range within $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ .<br>With reference to inductance value at $+20^{\circ}\text{C}$ ., change rate shall be calculated.<br>Change of maximum inductance deviation in step 1 to 5 <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>Minimum operating temperature</td> </tr> <tr> <td>3</td> <td>20 (Standard temperature)</td> </tr> <tr> <td>4</td> <td>Maximum operating temperature</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 20 | 2 | Minimum operating temperature | 3 | 20 (Standard temperature) | 4 | Maximum operating temperature | 5 | 20 |
| Step                           | Temperature (°C)   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 1                              | 20   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 2                              | Minimum operating temperature  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 3                              | 20 (Standard temperature)  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 4                              | Maximum operating temperature  |      |                  |   |    |   |                               |   |                           |   |                               |   |    |
| 5                              | 20   |      |                  |   |    |   |                               |   |                           |   |                               |   |    |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).



**8. Resistance to flexure of substrate**
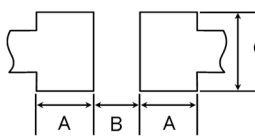
| Specified Value          | No damage  |   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|--------------------------|--|---|------|---|---|---|------|------|-----|-----|------|-----|------|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|--|--|
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2 mm. |   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          | Test board size  | : 100 × 40 × 1.0  |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          | Test board material  | : Glass epoxy-resin   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          | Solder cream thickness   | : 0.10mm (2020~3030 type)   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          |  | : 0.15mm (4040~8080 type)   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          | Land dimension   |   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          |   |   |      |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
|                          |  | <table border="1"> <thead> <tr> <th>Type</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2020</td> <td>0.65</td> <td>0.7</td> <td>2.0</td> </tr> <tr> <td>2424</td> <td>0.7</td> <td>0.75</td> <td>2.0</td> </tr> <tr> <td>3030</td> <td>0.8</td> <td>1.4</td> <td>2.7</td> </tr> <tr> <td>4040</td> <td>1.2</td> <td>1.6</td> <td>3.7</td> </tr> <tr> <td>5050</td> <td>1.5</td> <td>2.1</td> <td>4.0</td> </tr> <tr> <td>6060</td> <td>1.6</td> <td>3.1</td> <td>5.7</td> </tr> <tr> <td>8080</td> <td>1.8</td> <td>3.8</td> <td>7.5</td> </tr> </tbody> </table> | Type | A | B | C | 2020 | 0.65 | 0.7 | 2.0 | 2424 | 0.7 | 0.75 | 2.0 | 3030 | 0.8 | 1.4 | 2.7 | 4040 | 1.2 | 1.6 | 3.7 | 5050 | 1.5 | 2.1 | 4.0 | 6060 | 1.6 | 3.1 | 5.7 | 8080 | 1.8 | 3.8 | 7.5 |  |  |
| Type                     | A  | B   | C    |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 2020                     | 0.65   | 0.7   | 2.0  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 2424                     | 0.7  | 0.75  | 2.0  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 3030                     | 0.8  | 1.4   | 2.7  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 4040                     | 1.2  | 1.6   | 3.7  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 5050                     | 1.5  | 2.1   | 4.0  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 6060                     | 1.6  | 3.1   | 5.7  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |
| 8080                     | 1.8  | 3.8   | 7.5  |   |   |   |      |      |     |     |      |     |      |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |     |  |  |



**9. Insulation resistance : between wires**

|                 |   |
|-----------------|---|
| Specified Value | — |
|-----------------|---|


**10. Insulation resistance : between wire and core**

|                 |   |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

**11. Withstanding voltage : between wire and core**

|                 |   |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

**12. Adhesion of terminal electrode**

|                          |   |                              |  |  |
|--------------------------|---|------------------------------|--|--|
| Specified Value          | Shall not come off PC board   |                              |  |  |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow.                 |                              |  |  |
|                          | Applied force   | : 10N to X and Y directions. |  |  |
|                          | Duration  | : 5s.                        |  |  |
|                          | Solder cream thickness  | : 0.10mm (2020~3030 type)    |  |  |
|                          |   | : 0.15mm (4040~8080 type)    |  |  |
|                          |  |                              |  |  |

**13. Resistance to vibration**

|                          |   |  |   |   |
|--------------------------|---|--|---|---|
| Specified Value          | Inductance change : Within ±10%                                     |  |   |   |
|                          | No significant abnormality in appearance.                           |  |   |   |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. |  |   |   |
|                          | Then it shall be submitted to below test conditions.                |  |   |   |
|                          | Frequency Range   | 10~55Hz  |   |   |
|                          | Total Amplitude   | 1.5mm (May not exceed acceleration 196m/s <sup>2</sup> )   |   |   |
|                          | Sweeping Method   | 10Hz to 55Hz to 10Hz for 1min.   |   |   |
|                          | Time  | X  | Y | Z |
|                          |   | For 2 hours on each X, Y, and Z axis.  |   |   |
|                          | Recovery  | : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |   |   |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

#### 14. Solderability

|  |  |            |
|--|--|------------|
| Specified Value  | At least 90% of surface of terminal electrode is covered by new solder.  |            |
| Test Methods and Remarks   | The test samples shall be dipped in flux, and then immersed in molten solder as shown in below table.<br>Flux : Ethanol solution containing rosin 25%. |            |
|  | Solder Temperature   | 245±5°C    |
|  | Time   | 5±1.0 sec. |
| ※Immersion depth : All sides of mounting terminal shall be immersed. |  |            |

#### 15. Resistance to soldering heat

|                          |  |  |
|--------------------------|--|--|
| Specified Value          | Inductance change : Within ±10%<br>No significant abnormality in appearance.   |  |
| Test Methods and Remarks | The test sample shall be exposed to reflow oven at 230±5°C for 40 seconds, with peak temperature at 260±5°C for 5 seconds, 2 times.<br>Test board material : Glass epoxy-resin<br>Test board thickness : 1.0mm |  |

#### 16. Thermal shock

|   |   |                  |                |
|---|---|------------------|----------------|
| Specified Value   | Inductance change : Within ±10%<br>No significant abnormality in appearance.  |                  |                |
| Test Methods and Remarks  | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown in below table in sequence. The temperature cycle shall be repeated 100 cycles. |                  |                |
|   | Conditions of 1 cycle   |                  |                |
|   | Step  | Temperature (°C) | Duration (min) |
|   | 1   | -40±3            | 30±3           |
|   | 2   | Room temperature | Within 3       |
| 3   | +85±2   | 30±3             |                |
| 4   | Room temperature  | Within 3         |                |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |   |                  |                |

#### 17. Damp heat

|   |   |                |
|---|---|----------------|
| Specified Value   | Inductance change : Within ±10%<br>No significant abnormality in appearance.  |                |
| Test Methods and Remarks  | The test samples shall be soldered to the test board by the reflow.<br>The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below table. |                |
|   | Temperature   | 60±2°C         |
|   | Humidity  | 90~95%RH       |
|   | Time  | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |   |                |

#### 18. Loading under damp heat

|   |  |                |
|---|--|----------------|
| Specified Value   | Inductance change : Within ±10%<br>No significant abnormality in appearance.   |                |
| Test Methods and Remarks  | The test samples shall be soldered to the test board by the reflow.<br>The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below table. |                |
|   | Temperature  | 60±2°C         |
|   | Humidity   | 90~95%RH       |
|   | Applied current  | Rated current  |
|   | Time   | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |  |                |

#### 19. Low temperature life test

|   |  |                |
|---|--|----------------|
| Specified Value   | Inductance change : Within ±10%<br>No significant abnormality in appearance.   |                |
| Test Methods and Remarks  | The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below table. |                |
|   | Temperature  | -40±2°C        |
|   | Time   | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |  |                |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

20. High temperature life test

|                 |   |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

21. Loading at high temperature life test

|                          |   |                          |
|--------------------------|---|--------------------------|
| Specified Value          | Inductance change : Within $\pm 10\%$<br>No significant abnormality in appearance.  |                          |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow soldering.   |                          |
|                          | Temperature   | $85 \pm 2^\circ\text{C}$ |
|                          | Applied current   | Rated current            |
|                          | Time  | $500 + 24 / - 0$ hour    |
|                          | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |                          |

22. Standard condition

|                 |  |
|-----------------|--|
| Specified Value | Standard test condition :<br>Unless otherwise specified, temperature is $20 \pm 15^\circ\text{C}$ and $65 \pm 20\%$ of relative humidity.<br>When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^\circ\text{C}$ of temperature, $65 \pm 5\%$ relative humidity.<br>Inductance is in accordance with our measured value. |
|-----------------|--|

**Wire-wound Ferrite Power Inductors LSXN/LSXP series**

**for General Electronic Equipment for Consumer**

**Wire-wound Ferrite Power Inductors LSXBH10050 for General Electronic Equipment for Consumer**

**Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer**

**Wire-wound Ferrite Power Inductors LLXN/LLXP series**

**for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)**

**Wire-wound Ferrite Power Inductors LLXBH10050**

**for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)**

**Wire-wound Ferrite Power Inductors LLRN series**

**for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)**


**■ PRECAUTIONS**

**1. Circuit Design**

|             |  |
|-------------|--|
| Precautions | <ul style="list-style-type: none"> <li>◆ Verification of operating environment, electrical rating and performance                             <ol style="list-style-type: none"> <li>1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.</li> <li>2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.</li> </ol> </li> <li>◆ Operating Current (Verification of Rated current)                             <ol style="list-style-type: none"> <li>1. The operating current including inrush current for inductors must always be lower than their rated values.</li> <li>2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.</li> </ol> </li> <li>◆ Temperature rise                             <p>Temperature rise of power choke coil depends on the installation condition in end products.</p> <p>Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> </li> </ul> |
|-------------|--|


**2. PCB Design**

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Land pattern design                             <ol style="list-style-type: none"> <li>1. Please refer to a recommended land pattern.</li> <li>2. There is stress, which has been caused by distortion of a PCB, to the inductor. (LSXN/LSXP/LLXN/LLXP)</li> <li>3. Please consider the arrangement of parts on a PCB. (LSXN/LSXP/LLXN/LLXP)</li> </ol> </li> </ul>   |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Land pattern design                             <p>Surface Mounting</p> <ol style="list-style-type: none"> <li>1. Mounting and soldering conditions should be checked beforehand.</li> <li>2. Applicable soldering process to this products is reflow soldering only.</li> <li>3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXN/LSXP/LLXN/LLXP)</li> <li>4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a ferrite core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXN/LSXP/LLXN/LLXP)</li> </ol> </li> </ul> |

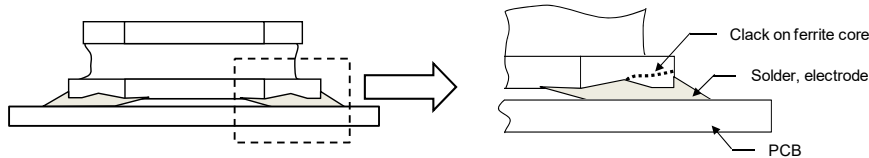

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board. (LSXN/LSXP/LLXN/LLXP)

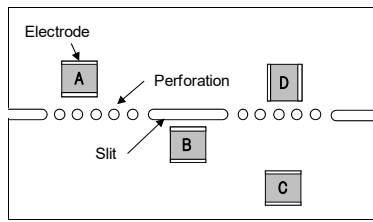

A product tends to undergo stress in order “A>C>B≡D”. Please consider the layouts of a product to minimize any stresses.

### 3. Considerations for automatic placement

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine</li> <li>1. Excessive impact load should not be imposed on the products when mounting onto the PC boards.</li> <li>2. Mounting and soldering conditions should be checked beforehand.</li> </ul>   |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine</li> <li>1. When installing products, care should be taken not to apply distortion stress as it may deform the products.</li> <li>2. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXN/LSXP/LLXN/LLXP)</li> </ul> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>&lt;Wrap&gt;</p> </div> <div style="text-align: center;"> <p>&lt;Twist&gt;</p> </div> </div> |

### 4. Soldering

|                          |   |
|--------------------------|---|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Reflow soldering</li> <li>1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>2. The product shall be used reflow soldering only.</li> <li>3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> <li>◆ Lead free soldering</li> <li>1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> <li>◆ Recommended conditions for using a soldering iron (Repair) <ul style="list-style-type: none"> <li>• Put the soldering iron on the land-pattern.</li> <li>• Soldering iron's temperature - Below 350°C</li> <li>• Duration - 3 seconds or less</li> <li>• The soldering iron should not directly touch the inductor.</li> </ul> </li> </ul> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Reflow soldering</li> <li>1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ul> <p style="text-align: center;">Recommended reflow condition (Pb free solder)</p>   |

### 5. Cleaning

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Cleaning conditions</li> <li>1. Washing by supersonic waves shall be avoided.</li> </ul>                |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Cleaning conditions</li> <li>1. If washed by supersonic waves, the products might be broken.</li> </ul> |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

## 6. Handling

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. Keep the product away from all magnets and magnetic objects.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> <li>2. Please do not add any shock and power to a product in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. Please avoid accumulation of a packing box as much as possible.</li> </ol> </li> </ul> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. There is a case that a characteristic varies with magnetic influence.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. There is a case to be damaged by a mechanical shock.</li> <li>2. There is a case to be broken by the handling in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Damage and a characteristic can vary with an excessive shock or stress.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.</li> </ol> </li> </ul>   |

## 7. Storage conditions

|                          |   |
|--------------------------|---|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.                   <ul style="list-style-type: none"> <li>▪ Storage conditions                       <ul style="list-style-type: none"> <li>Ambient temperature : <math>-5\sim 40^{\circ}\text{C}</math></li> <li>Humidity : Below 70% RH</li> </ul> </li> <li>▪ The recommended ambient temperature is below <math>30^{\circ}\text{C}</math>. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes.</li> </ul> </li> </ol> </li> </ul> <p style="margin-left: 40px;">For this reason, product should be used within 6 months from the time of delivery.</p> <p style="margin-left: 40px;">In case of storage over 6 months, solderability shall be checked before actual usage.</p> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</li> </ol> </li> </ul>  |