




HZ0603B751R-10

PHYSICAL DIMENSIONS:


A	1.60 [.063]	+ 0.15	[.006]
B	0.80 [.031]	+ 0.15	[.006]
C	0.80 [.031]	+ 0.15	[.006]
D	0.36 [.014]	+ 0.15	[.006]

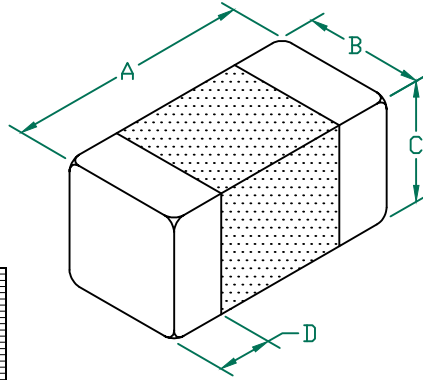

ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	750		
Minimum	563		
Maximum	938	0.600	200 mA

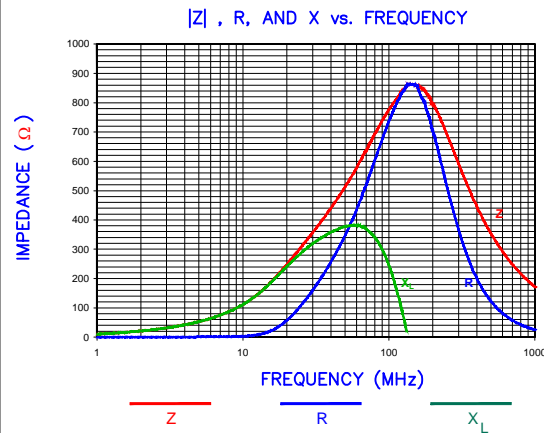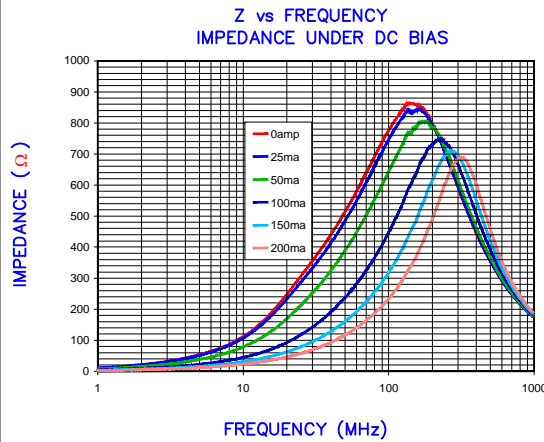


LAND PATTERNS FOR REFLOW SOLDERING

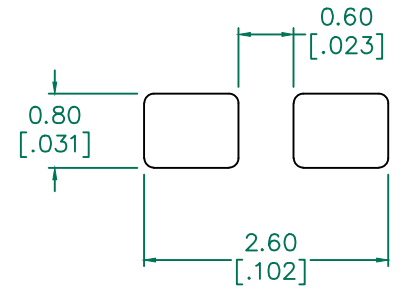

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

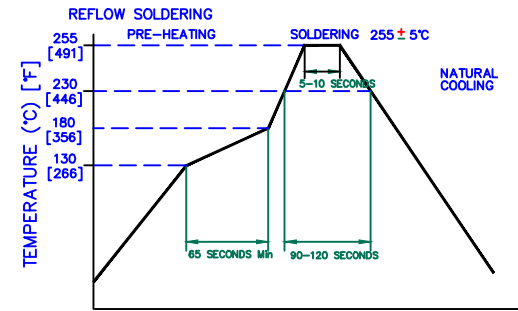

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
C	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU	PROJECT/PART NUMBER:	HZ0603B751R-10	REV	C
B	UPDATE COMPANY LOGO ADD ROHS	02/26/08	JRK	DATE:	04/16/04	SCALE:	-
A	ORIGINAL DRAFT	04/16/04	JRK	CAD #	HZ0603B751R-10-C	TOOL #	-
REV	DESCRIPTION	DATE	INT			SHEET: 1 of 1	

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3298

