





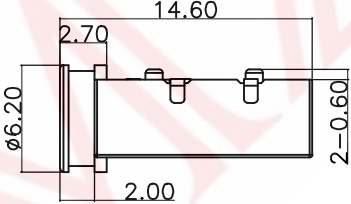
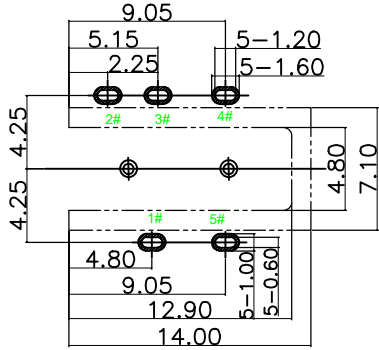







1	2	3	4	5	6	7	8																																				
						REV A1	ECN NO NEW	DESCRIPTION Replace frame	DESIGN	APPROVAL	DATE 2018.06.12																																
E	 <p data-bbox="698 370 806 399">3D VIEW</p>							E																																			
D	<p data-bbox="152 325 241 351">NOTES</p> <p data-bbox="152 357 680 644"> 1.CURRENT RATING: 1A.  2.CONTACT RESISTANCE: 100mΩ MAX.  3.INSULATION RESISTANCE: 100MΩ MIN.  4.DIELECTRIC WITHSTANDING: 500V AC MIN.  5.DURABILITY: 5000 CYCLES MIN.  6.CONNECTOR MATING FORCES: 3~30N.  7.CONNECTOR UNMATING FORCES: 3~30NX.  8.SALT SPRAY: 24HOUR  9.WATERPROOF LEVEL: IP67.  10.OPERATING TEMPERATURE: -25°C TO +85°C.  <b>Not to install the waterproof ring shipment</b> </p>							D																																			
C	<p data-bbox="152 721 537 766">8F H 5 146 A T A</p> <p data-bbox="546 778 743 804">MODEL DEFINITION</p> <p data-bbox="546 810 976 989"> Mould Number:01  Fixing Method:Fixing Column  Interface Method:Convention Extended Opening  Overall Length:14.6mm  Pin Position:5PIN  Mounting Method:Sinking Plate  Product Series: 3.5mm Audio Jack </p>						 <p data-bbox="1693 1123 1845 1161">PCB LAYOUT (TOP VIEW) TOLERANCE: ±0.05</p>	C																																			
B	 <p data-bbox="161 1155 376 1174">0.35mm 4 POLE PLUG DETAIL</p>	 <p data-bbox="412 1155 654 1174">0.35mm 4 POLE PLUG SCHEMATIC</p>	 <p data-bbox="770 1155 842 1174">SCHEMATIC</p>	 <p data-bbox="967 1149 1137 1168">BLACK WATERPROOF RING</p>			B																																				
A	<table border="1"> <thead> <tr> <th>ITEM</th> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>QTY</th> <th>FINISH/COLOR</th> </tr> </thead> <tbody> <tr> <td>F</td> <td>胶水</td> <td>环氧树脂</td> <td>1</td> <td>黑色</td> </tr> <tr> <td>E</td> <td>防水圈</td> <td>硅胶</td> <td>1</td> <td>黑色</td> </tr> <tr> <td>D</td> <td>底座</td> <td>高温尼龙</td> <td>1</td> <td>黑色</td> </tr> <tr> <td>C</td> <td>封盖</td> <td>高温尼龙</td> <td>1</td> <td>黑色</td> </tr> <tr> <td>B</td> <td>引脚</td> <td>磷青铜</td> <td>2.3</td> <td>镀镍/接触区焊位镀金</td> </tr> <tr> <td>A</td> <td>引脚</td> <td>不锈钢</td> <td>1.4.5</td> <td>镀镍/接触区焊位镀金</td> </tr> </tbody> </table>				ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	F	胶水	环氧树脂	1	黑色	E	防水圈	硅胶	1	黑色	D	底座	高温尼龙	1	黑色	C	封盖	高温尼龙	1	黑色	B	引脚	磷青铜	2.3	镀镍/接触区焊位镀金	A	引脚	不锈钢	1.4.5	镀镍/接触区焊位镀金	<p data-bbox="1137 1187 1272 1212">FIRST VIEW</p> 	<p data-bbox="1505 1193 1702 1340">The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM</p>	<p data-bbox="1711 1187 1792 1206">TITLE::</p> <p data-bbox="1729 1219 2087 1244">3.5mm 5P S.K.P JCAK IPX7</p>	A
ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR																																							
F	胶水	环氧树脂	1	黑色																																							
E	防水圈	硅胶	1	黑色																																							
D	底座	高温尼龙	1	黑色																																							
C	封盖	高温尼龙	1	黑色																																							
B	引脚	磷青铜	2.3	镀镍/接触区焊位镀金																																							
A	引脚	不锈钢	1.4.5	镀镍/接触区焊位镀金																																							
<p data-bbox="896 1270 1111 1295">GENERAL TOLERANCE</p> <table border="1"> <tbody> <tr> <td>≥0~2&lt;</td> <td>±0.15</td> </tr> <tr> <td>≥2~5&lt;</td> <td>±0.25</td> </tr> <tr> <td>≥0~2&lt;</td> <td>±0.15</td> </tr> <tr> <td>≥5</td> <td>±0.35</td> </tr> </tbody> </table>				≥0~2<	±0.15	≥2~5<	±0.25	≥0~2<	±0.15	≥5	±0.35	<p data-bbox="1120 1315 1209 1340">SCALE</p> <p data-bbox="1245 1315 1308 1340">1:1</p> <p data-bbox="1326 1315 1388 1340">UNIT</p> <p data-bbox="1424 1315 1469 1340">mm</p>	<p data-bbox="1120 1372 1702 1417">SAMZO COMPONENTS</p> <p data-bbox="1120 1430 1702 1461">Electronic switch and connector manufacturer</p>		<p data-bbox="1711 1270 2007 1295">DWG NO: 8FH5146-P06</p> <p data-bbox="1711 1315 2007 1340">PART NO: 8FH51461576</p> <p data-bbox="1711 1359 2024 1385">MODEL NO: 8FH5146ATA</p>	<p data-bbox="1800 1410 1890 1430">NAME:</p> <p data-bbox="1800 1442 2087 1468">WATERPROOF SOCKET</p>																											
≥0~2<	±0.15																																										
≥2~5<	±0.25																																										
≥0~2<	±0.15																																										
≥5	±0.35																																										
1	2	3	4	5	6	7	8																																				