




REV.	MODIFICATION	REV. No.	NAME	DATE
A0			严专专	2020-10-20



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

- MATERIAL:**
 MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED Min ON CONTACT AREA, 100u"
 Min TIN (LEAD FREE) ON SOLDER AREA,
 SHELL: SUS201-H,T=0.30±0.03mm
 50u" NICKEL PLATING OVER ALL.
- MECHANICAL:**
 INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.
 DURABILITY: 5000 CYCLES
- ELECTRICAL:**
 CURRENT: 3A FOR VBUS;
 1.25A FOR GND PIN.
0.25A FOR OTHER.
 VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL**
 TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:**
 图示有标示Ⓢ者为首样全检, 重点管控尺寸。
- 产品符合RoHS标准。

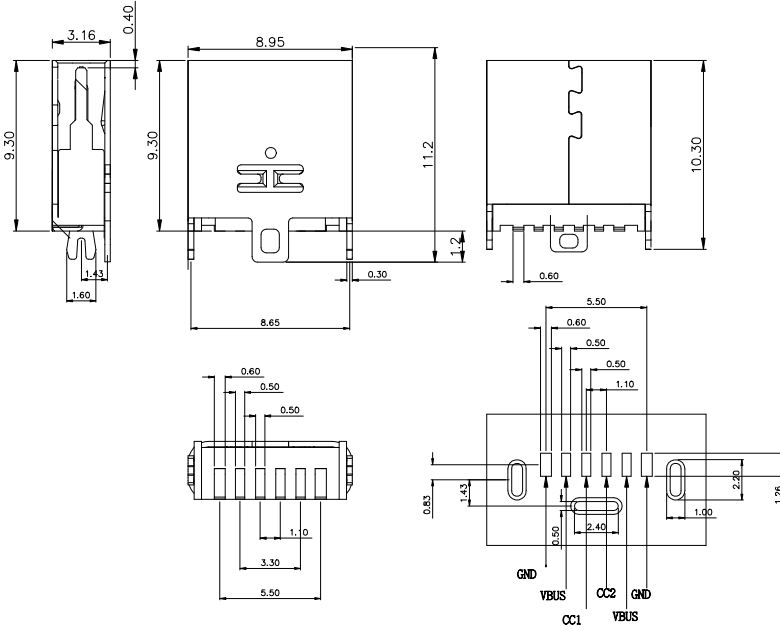

深圳市金航标电子有限公司		WWW.BDS666.COM	
KH-TYPE-C-L9.3-6P-STM		0755-83044319	
.X: ±0.35	.X': ±1.5"	INTENDED USE:	TITLE:
.XX: ±0.25	.XX': ±1.0"	CONNECTOR	USB TYPE C 6PIN PLUG 简易版立贴9.3
.XXX: ±0.20	.XXX': ±0.5"	APPD.:	PART NO.:
MAT'L:	SEE NOTES	CHKD.:	SEE TABLE
FINISH:		DR.: Len.Song	DWG. NO.:
			T16-000X
			SCALE: 1:1
			PAGE: 1/1
			UNIT: mm
			REV.: A0