

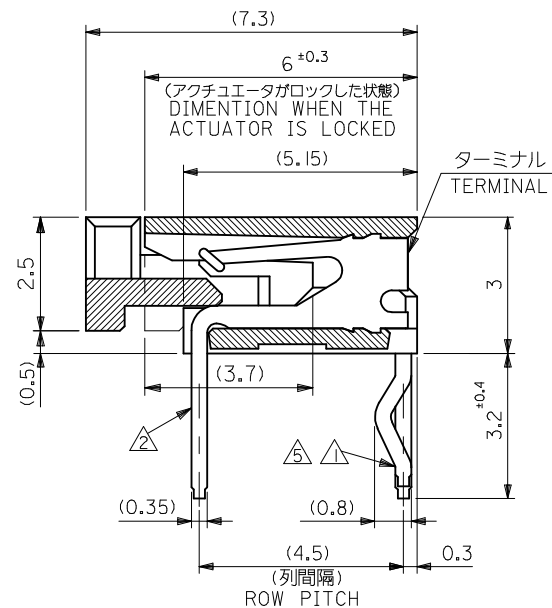
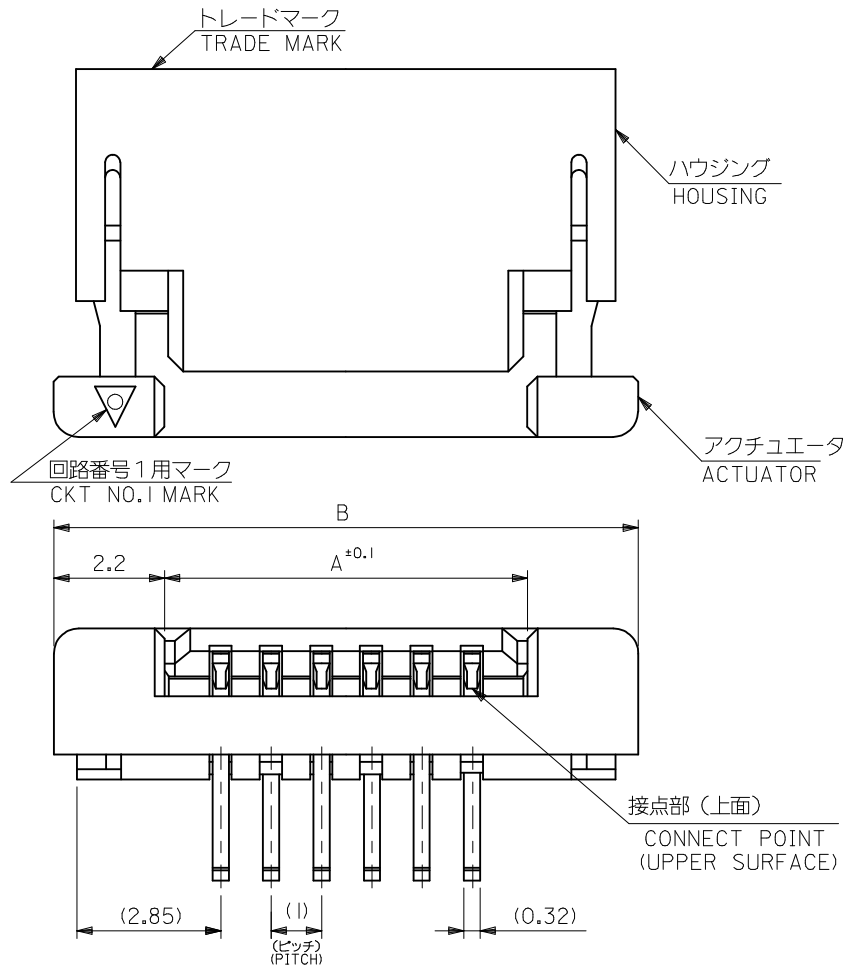


SD-52089-010

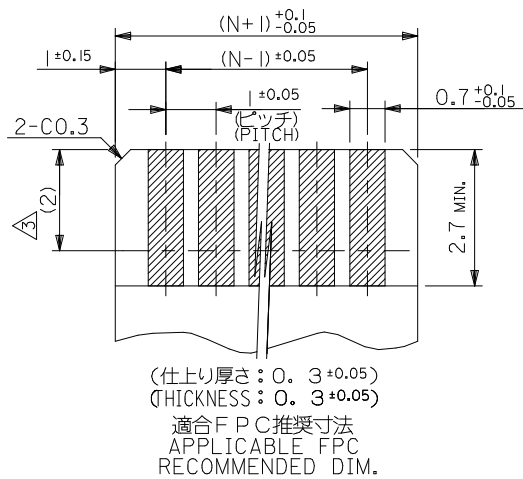

35.6	31.2	52089-3029	30
34.6	30.2	-2929	29
33.6	29.2	-2829	28
32.6	28.2	-2729	27
31.6	27.2	-2629	26
30.6	26.2	-2529	25
29.6	25.2	-2429	24
28.6	24.2	-2329	23
27.6	23.2	-2229	22
26.6	22.2	-2129	21
25.6	21.2	-2029	20
24.6	20.2	-1929	19
23.6	19.2	-1829	18
22.6	18.2	-1729	17
21.6	17.2	-1629	16
20.6	16.2	-1529	15
19.6	15.2	-1429	14
18.6	14.2	-1329	13
17.6	13.2	-1229	12
16.6	12.2	-1129	11
15.6	11.2	-1029	10
14.6	10.2	-0929	9
13.6	9.2	-0829	8
12.6	8.2	-0729	7
11.6	7.2	-0629	6
10.6	6.2	52089-0529	5
B	A	MATERIAL NO.	極数 CKT.

REVISED EC NO: J2013-4517 DRWN:AYOSHI I 01 2013/06/13 CHKD:YKOBAYASHI 022013/06/13 APPR:YNOGAWA 2013/07/03 A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY AYOSHI I 01	DATE 2013/06/13	TITLE 1.0 FPC CONN. Z.I.F. R/A -LEAD FREE- molex				
		10 OVER 30 UNDER	± ---	CHECKED BY YKOBAYASHI 02	DATE 2013/06/13					
		30 OVER	± ---	APPROVED BY	DATE					
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.				SHEET NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52089-010				1 OF 2	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

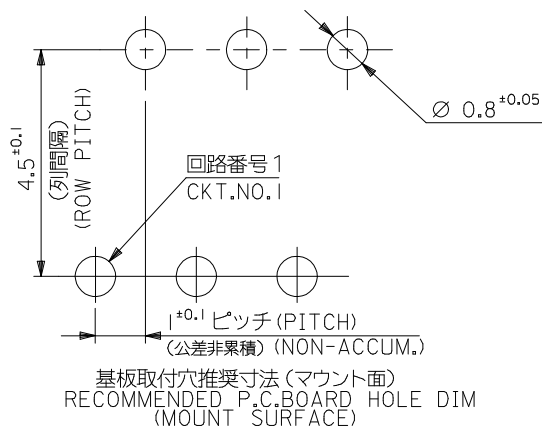

注記 NOTES

△ CKT NO.1を基準に偶数番目のソルダーテール。
EVEN NUMBER SOLDER TAIL

△ CKT NO.1を基準に奇数番目のソルダーテール。
ODD NUMBER SOLDER TAIL

△ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.

4. 使用材料
MATERIAL

ハウジング : 66ナイロン, UL94V-0

HOUSING : 66NYLON, UL94V-0

アクチュエータ : ポリエステル, UL94V-0

ACTUATOR : POLYESTER, UL94V-0

ターミナル : リン青銅, ニッケル下地 錫ヒスマスメッキ

TERMINAL : PHOS-BRO.TIN-BISMUTH PLATED OVER NICKEL

△ キンクはソルダーテール△の両端のみに適用。
KINK APPLIES BOTH SIDE △ TERMINALS ONLY

6. 本製品は 52089-***20 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52089-***20

FPCについて:

打抜き方向は導体側から補強板側を推奨致します。

補強フィルム材質はポリイミドを推奨致します。

接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION : FORM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.

RECOMMENDED MATERIAL:

STIFFENER FILM : POLYIMIDE

BONDING AGENT : THERMOSETTING BONDING AGENT

REVISED EC NO: J2013-1517 DRWN:AYOSHI101 2013/06/13 CHKD:YKOBAYASHI022013/06/13 APPR:YNOGAWA 2013/07/03	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	AYOSHI101	2013/06/13	TITLE 1.0 FPC CONN. Z.I.F. R/A -LEAD FREE-				
		10 OVER 30 UNDER	± ---	CHECKED BY	DATE					
		30 OVER	± ---	YKOBAYASHI02	2013/06/13	molex				
		ANGULAR	± --- °	APPROVED BY	DATE					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
A	REV	SEE SHEET 1 OF 2		SD-52089-010		2 OF 2				
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								