




ALL NEW PRODUCTS!



## HEYClip™ Split Dart Cable Holders

MAXIMUM BUNDLE DIA.		MOUNTING HOLE DIA.		PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C		STYLE
in.	mm.	in.	mm.			in.	mm.	
For panels up to .047" (1,2 mm) thick								
.150	3,8	.256	6,5	<b>12379</b>	CH SD-38-65	.35	8,9	1
For panels up to .063" (1,6 mm) thick								
.114	2,9	.177	4,5	<b>12387</b>	CH SD-29-45	.25	6,4	2
.150	3,8	.256	6,5	<b>12386</b>	CH SD-38-65-1	.35	8,9	1
.331	8,4	.217	5,5	<b>12380</b>	CH SD-84-55	.43	10,9	3
		.236	6,0	<b>12381</b>	CH SD-84-60	.47	11,9	
For panels up to .075" (1,9 mm) thick								
.437	11,1	.236	6,0	<b>12382</b>	CH SD-111-60	.55	14,0	3
For panels up to .079" (2,0 mm) thick								
.197	5,0	.256	6,5	<b>12383</b>	CH SD-50-65	.32	8,1	3
.217	5,5	.217	5,5	<b>12384</b>	CH SD-55-55	.31	7,9	
.295	7,5	.217	5,5	<b>12385</b>	CH SD-75-55	.38	9,7	

Standard color natural.

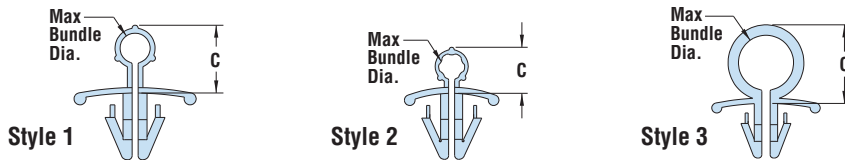


- Split dart feature allows user to easily slip the cable holder over the cable which is held firmly in place once inserted into the mounting hole.
- Designed to hold a single cable or wire bundles.



## HEYClip™ Optical Fiber Network Cable Holders

WIRE CAPACITY		MOUNTING HOLE DIAMETER		DART STYLE	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C		FOOTPRINT A x B		
in.	mm.	in.	mm.				94V-2	94V-0	in.	mm.	in.
For Round Mounting Holes For panels from .031" (0,8 mm) to .079" (2,0 mm) thick											
.83 x .75	21,1 x 19,1	.187	4,8	1	<b>12150</b>	<b>12150F</b>	CH OF-282-48	1.25	31,8	.27 x 1.06	6,9 x 26,9
		.250	6,4	2	<b>12151</b>	<b>12151F</b>	CH OF-282-64				
1.13 x .99	28,7 x 25,1	.187	4,8	1	<b>12153</b>	<b>12153F</b>	CH OF-344-48	1.50	38,1	.27 x 1.35	6,9 x 34,3
		.250	6,4	2	<b>12154</b>	<b>12154F</b>	CH OF-344-64				
For Square Mounting Holes For panels from .031" (0,8 mm) to .079" (2,0 mm) thick											
.83 x .75	21,1 x 19,1	.374	9,5	4	<b>12156</b>	<b>12156F</b>	CH OF-282-95S	1.19	30,2	.27 x 1.06	6,9 x 26,9
		.307	7,8	3	<b>12161</b>	<b>12161F</b>	CH OF-344-78S				
1.13 x .99	28,7 x 25,1	.374	9,5	4	<b>12157</b>	<b>12157F</b>	CH OF-344-95S	1.44	36,6	.27 x 1.35	6,9 x 34,3
		.374	9,5	4	<b>12158</b>	<b>12158F</b>	CH OF-550-95S				
1.38 x 1.73	35,1 x 43,9	.374	9,5	4	<b>12158</b>	<b>12158F</b>	CH OF-550-95S	2.25	57,2	.27 x 1.69	6,9 x 42,9

Standard color natural.

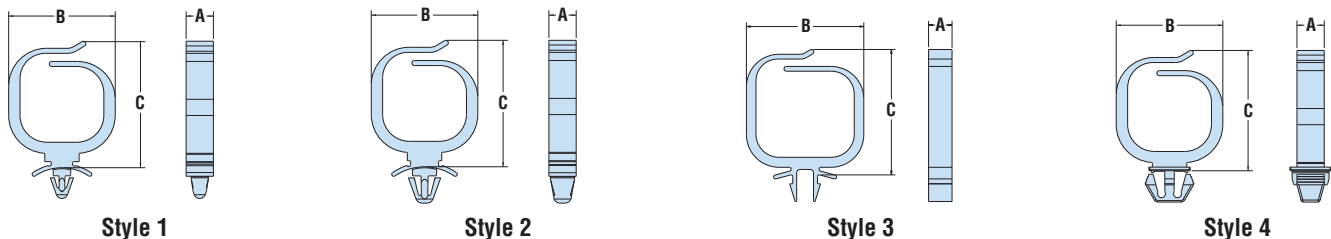

- Smooth, rounded corners eliminate stress on delicate fiber optic wires.
- Gather and route fiber optic wires.
- Available for round and square mounting holes.

	Split Dart	Optical Fiber
Material	Nylon 6/6	Nylon 6/6
Flammability Rating	94V-2	94V-2 and 94V-0
Temperature Range	-40°F (-40°C) to 185°F (85°C)	32°F (0°C) to 185°F (85°C) (94V-2) 32°F (0°C) to 203°F (95°C) (94V-0)

Quick Specs

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[12156](#) [12150](#) [12153](#) [12154F](#) [12158](#) [12161](#) [12380](#) [12379](#) [12387](#) [12157F](#) [12156F](#) [12384](#) [12386](#) [12150F](#)  
[12161F](#) [12154](#) [12385](#) [12382](#) [12153F](#) [12158F](#) [12151](#) [12151F](#) [12157](#) [12383](#) [12381](#)