


TE Internal #: 5569026-1 Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle, RJ25 Connectors

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ25 Connectors

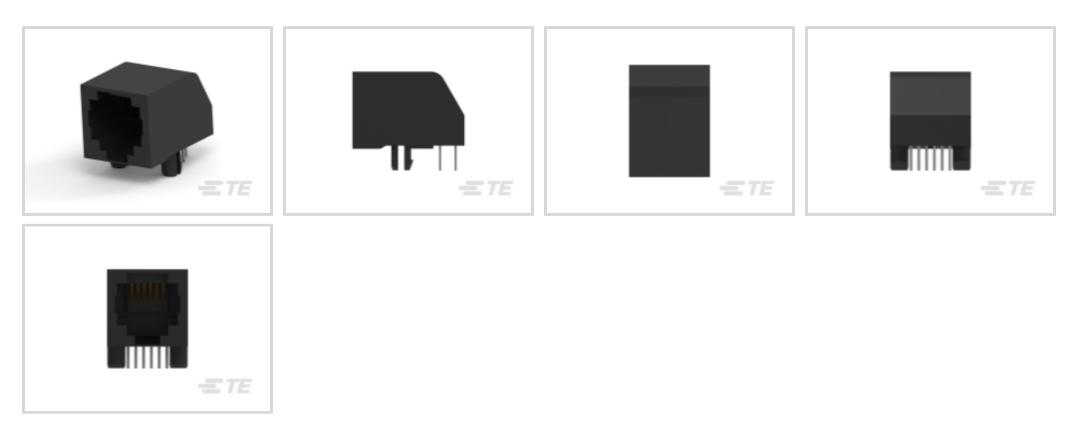

Port Configuration: Single Port Port Matrix Configuration: 1 x 1

Connector Profile: Low

Modular Jacks & Plugs Products: RJ Type Jacks & Plugs

Connector Contact Density: Standard

Features

Product Type Features

Grounding Options	None
Connector Product Type	Connector Assembly
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Configuration Features	
Number of Positions	6
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
PCB Mount Orientation	Right Angle
Number of Loaded Positions	6
Body Features	

C For support call+1 800 522 6752

5569026-1

Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle, RJ25 Connectors



Connector Profile	Low
Modular Jack Latch Orientation	Standard - Latch Down
Contact Features	
	50 µin
Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	.2 A, 1.5 A
PCB Contact Termination Area Plating Material	Tin
Fermination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.56 mm[.14 in]
Mechanical Attachment	
Mating Alignment	Without
Connector Mounting Type	Board Mount
Panel Mount Feature	With
Jouring Fostures	

Housing Features

Mating Entry Location	Side
Housing Color	Black
Housing Material	High Temperature Nylon
Centerline (Pitch)	1.02 mm[.04 in]
Dimensions	
Connector Height	12.7 mm[.5 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Shielded	No
Industry Standards	
Performance Category	Cat 3
UL Flammability Rating	UL 94V-0

5569026-1

Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle, RJ25 Connectors



Packaging Features

Packaging Method	Box & Tray, Package
Packaging Quantity	176

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge

based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

5569026-1

Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle, RJ25 Connectors





Documents

Product Drawings MJ,LPF,R/A,6P,HTN

English

CAD Files **Customer View Model** ENG_CVM_CVM_5569026-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5569026-1_A.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_5569026-1_A.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English