
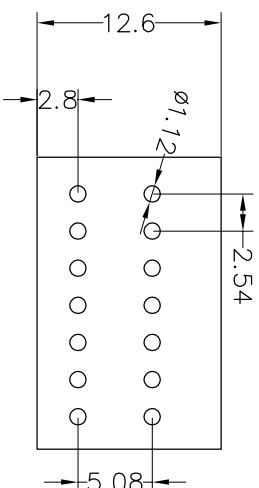


SPECIFICATIONS

Rated(额定参数): 150V,5A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):20~26AWG
 Strip length(剥线长度):11mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s



Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)
 Reed(弹片): Stainless seel (不锈钢)

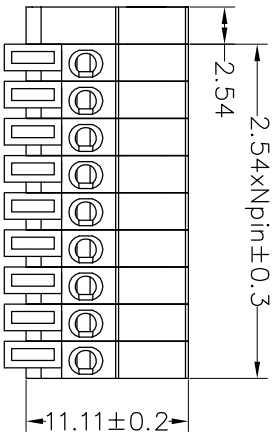

Ordering Information

JL 141V - 254 XX G X 1

Pitch 254=2.54PH
 No.of pins 1P-XXP
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
 Packing
 0=Pe bog
 T=Tube
 A=Troy

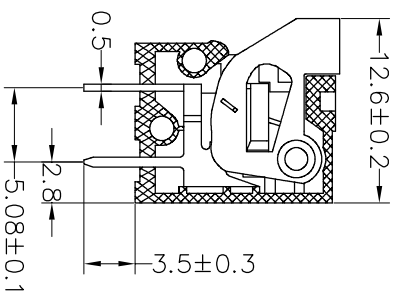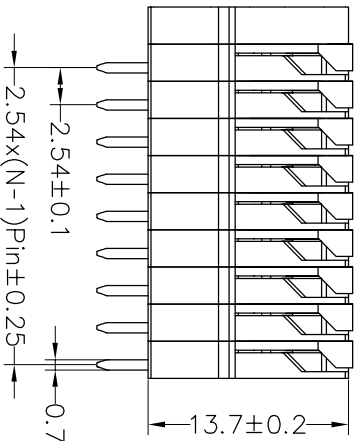

OPERATION	X.X	±0.30	DRAW	yyusheng	18.09.08	SCALE	UNIT	mm	FIT	1/1	TITLE:	2.54mm PCB SPRING TERMINAL BOLCKS
	X.XX	±0.20		CHECK				SIZE		A4		
ANGLE	X.XXX	±0.10	APPROVE			PROU.						
DATE	2018.09.08	NEW DRAWING	CHANGE									
REV	1	MODIFICATION DESCRIPTION										

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992