

1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

DC-DC Converter

1 Watt

- ⊕ Up to 86% efficiency
- ⊕ 3000VDC isolation
- ⊕ SIP7 package
- ⊕ Low ripple and noise
- ⊕ Operating temperature: -40°C to +85°C
- ⊕ International standard pinout
- ⊕ EMI complies with EN55032 Class B

Introducing our new power 1S7BE_3U series, engineered to deliver high efficiency and reliable performance in a compact SIP7 package. Achieving up to 86% efficiency, these modules ensure optimal energy conversion and minimal waste. With a robust 3000VDC isolation, they provide excellent electrical insulation and enhanced safety. Designed with low ripple and noise characteristics, these modules ensure stable and clean power output for sensitive applications.

Operating reliably in a wide temperature range from -40°C to +85°C, they are suitable for various environmental conditions. Featuring an international standard pinout, our power modules are easy to integrate into existing systems. Additionally, they comply with EMI standards, specifically EN55032 Class B, ensuring minimal electromagnetic interference.



Common specifications	
Short circuit protection:	1 sec. MAX
Cooling:	Nature convection
Operation temperature range:	-40°C – +85°C (with derating)
Storage temperature range:	-40°C – +125°C
Case temperature:	100°C max.
Lead temperature:	260°C max., 1.5mm from case for 10 sec
Storage humidity range:	< 95%
MTBF (MIL-HDBK-217F@25°C):	>1,121 Mhours
Safety standards/approvals:	UL/cUL 60950-1, IEC/EN 60950-1
Case material:	Plastic [UL94-V0]
Weight:	2.3g
Dimensions:	19.3 x 6.1 x 9.9mm

Input specifications										
Item	Test condition	Min	Typ	Max	Units					
Input voltage range				±10	%					
Input surge voltage (1sec. max.)	<ul style="list-style-type: none"> • 3.3V input • 5VDC input • 12VDC input • 15VDC input • 24VDC input • 48VDC input 			6	7	15	18	28	54	VDC
Reflected ripple current*				20	mApk-pk					
Input filter	Capacitor									

* Reflected ripple current measured with a simulated source inductance of 12μH and a source capacitor Cin (47μF, ESR <1.0Ω at 100kHz).

Isolation specifications						
Item	Test condition	Min	Typ	Max	Units	
Isolation voltage	Tested for 1 minute	3000				VDC
Isolation resistance	Test at 500VDC	1000				MΩ
Isolation capacitance			60			pF

Output specifications						
Item	Test condition	Min	Typ	Max	Units	
Output voltage accuracy				±3	%	
Line regulation	For Vin change of ±1%			±1.2	%	
Load regulation	<ul style="list-style-type: none"> 20% to 100% load • 3.3V output • Others 			20	10	%
Temperature coefficient	100% full load			±0.02	%/°C	
Ripple & Noise	20MHz bandwidth			75	mVp-p	
Switching frequency	Full load, nominal input		80	KHz		

EMC specifications			
EMI	CE*	EN55032	CLASS B
EMI	RE	EN55032	CLASS B
EMS	ESD	IEC/EN61000-4-2	perf. Criteria A
EMS	RS	IEC/EN61000-4-3	perf. Criteria A
EMS	EFT**	IEC/EN61000-4-4	perf. Criteria A
EMS	Surge**	IEC/EN61000-4-5	perf. Criteria A
EMS	CS	IEC/EN61000-4-6	perf. Criteria A
EMS	PFMF	IEC/EN61000-4-8	perf. Criteria A

* Input filter components are required to help meet conducted emissions Class B, also see section EMI filter on page 4.

** An external filter capacitor is required if the module has to meet IEC61000-4-4/IEC61000-4-5, also see section EFT/Surge filter on page 4.

Example:

1S7BE_0505D3U

1 = 1Watt; S7 = SIP7; B = Pinning; E = Cost effective; 5Vin; 5Vout; D = Dual Output; 3 = 3kVDC; U = Unregulated Output

1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

Product Selection Guide

Single Output

Part Number	Input Voltage [V]	Output Voltage [VDC]	Input current		Output current [mA]	Capacitive load [μF, max]	Efficiency [%, typ]
			No load [mA, max]	Full load [mA, typ]			
1S7BE_0303S3U	3.3	3.3	28	399	303	220	76
1S7BE_0305S3U	3.3	5	22	389	200	220	78
1S7BE_0309S3U	3.3	9	35	379	111	220	80
1S7BE_0315S3U	3.3	15	30	389	67	220	78
1S7BE_0324S3U	3.3	24	30	415	42	220	73
1S7BE_0503S3U	5	3.3	15	256	303	220	78
1S7BE_0505S3U	5	5	17	247	200	220	81
1S7BE_0509S3U	5	9	15	244	111	220	82
1S7BE_0512S3U	5	12	17	253	83	220	79
1S7BE_0515S3U	5	15	17	233	67	220	86
1S7BE_0524S3U	5	24	20	244	42	220	82
1S7BE_1203S3U	12	3.3	12	111	303	220	75
1S7BE_1205S3U	12	5	14	105	200	220	79
1S7BE_1209S3U	12	9	9	104	111	220	80
1S7BE_1212S3U	12	12	13	105	83	220	79
1S7BE_1215S3U	12	15	10	102	67	220	82
1S7BE_1224S3U	12	24	20	110	42	220	76
1S7BE_1503S3U	15	3.3	10	83	303	220	80
1S7BE_1505S3U	15	5	7	82	200	220	81
1S7BE_1509S3U	15	9	10	85	111	220	78
1S7BE_1512S3U	15	12	8	83	83	220	80
1S7BE_1515S3U	15	15	12	84	67	220	79
1S7BE_1524S3U	15	24	5	80	42	220	83
1S7BE_2403S3U	24	3.3	8	56	303	220	74
1S7BE_2405S3U	24	5	6	54	200	220	77
1S7BE_2409S3U	24	9	6	55	111	220	76
1S7BE_2412S3U	24	12	6	53	83	220	78
1S7BE_2415S3U	24	15	5	52	67	220	80
1S7BE_2424S3U	24	24	8	52	42	220	80
1S7BE_4803S3U	48	3.3	5	29	303	220	73
1S7BE_4805S3U	48	5	5	29	200	220	73
1S7BE_4809S3U	48	9	5	27	111	220	76
1S7BE_4812S3U	48	12	5	27	83	220	76
1S7BE_4815S3U	48	15	5	27	67	220	77
1S7BE_4824S3U	48	24	6	27	42	220	76

1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

Product Selection Guide

Dual Output


Part Number	Input Voltage [V]	Output Voltage [VDC]	Input current		Output current [mA]	Capacitive load [μ F, max]	Efficiency [%, typ]
			No load [mA, max]	Full load [mA, typ]			
1S7BE_0303D3U	3.3	\pm 3.3	30	459	\pm 152	\pm 100	66
1S7BE_0305D3U	3.3	\pm 5	30	433	\pm 100	\pm 100	70
1S7BE_0309D3U	3.3	\pm 9	26	404	\pm 56	\pm 100	75
1S7BE_0312D3U	3.3	\pm 12	30	394	\pm 42	\pm 100	77
1S7BE_0315D3U	3.3	\pm 15	25	389	\pm 33	\pm 100	78
1S7BE_0324D3U	3.3	\pm 24	25	404	\pm 21	\pm 100	75
1S7BE_0503D3U	5	\pm 3.3	20	299	\pm 152	\pm 100	67
1S7BE_0505D3U	5	\pm 5	20	270	\pm 100	\pm 100	74
1S7BE_0509D3U	5	\pm 9	15	247	\pm 56	\pm 100	81
1S7BE_0512D3U	5	\pm 12	20	250	\pm 42	\pm 100	80
1S7BE_0515D3U	5	\pm 15	20	244	\pm 33	\pm 100	82
1S7BE_0524D3U	5	\pm 24	22	247	\pm 21	\pm 100	81
1S7BE_1203D3U	12	\pm 3.3	13	123	\pm 152	\pm 100	68
1S7BE_1205D3U	12	\pm 5	10	123	\pm 100	\pm 100	74
1S7BE_1209D3U	12	\pm 9	13	110	\pm 56	\pm 100	78
1S7BE_1212D3U	12	\pm 12	10	102	\pm 42	\pm 100	82
1S7BE_1215D3U	12	\pm 15	10	102	\pm 33	\pm 100	82
1S7BE_1224D3U	12	\pm 24	20	111	\pm 21	\pm 100	75
1S7BE_1503D3U	15	\pm 3.3	20	89	\pm 152	\pm 100	75
1S7BE_1505D3U	15	\pm 5	20	89	\pm 100	\pm 100	75
1S7BE_1509D3U	15	\pm 9	18	87	\pm 56	\pm 100	77
1S7BE_1512D3U	15	\pm 12	20	87	\pm 42	\pm 100	77
1S7BE_1515D3U	15	\pm 15	20	87	\pm 33	\pm 100	77
1S7BE_1524D3U	15	\pm 24	15	89	\pm 21	\pm 100	75
1S7BE_2403D3U	24	\pm 3.3	7	62	\pm 152	\pm 100	67
1S7BE_2405D3U	24	\pm 5	6	56	\pm 100	\pm 100	74
1S7BE_2409D3U	24	\pm 9	7	56	\pm 56	\pm 100	78
1S7BE_2412D3U	24	\pm 12	6	52	\pm 42	\pm 100	80
1S7BE_2415D3U	24	\pm 15	8	52	\pm 33	\pm 100	80
1S7BE_2424D3U	24	\pm 24	8	51	\pm 21	\pm 100	82
1S7BE_4803D3U	48	\pm 3.3	6	34	\pm 152	\pm 100	62
1S7BE_4805D3U	48	\pm 5	5	31	\pm 100	\pm 100	68
1S7BE_4809D3U	48	\pm 9	5	29	\pm 56	\pm 100	73
1S7BE_4812D3U	48	\pm 12	6	28	\pm 42	\pm 100	74
1S7BE_4815D3U	48	\pm 15	5	27	\pm 33	\pm 100	77
1S7BE_4824D3U	48	\pm 24	6	28	\pm 21	\pm 100	74

1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

Typical characteristics


Derating Curve

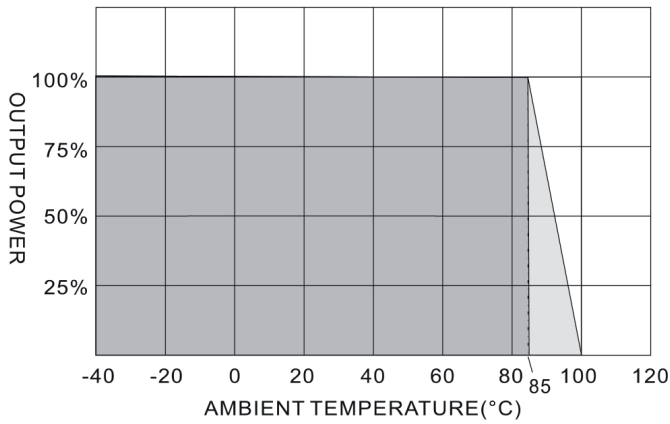

Input voltage	Slow burning fuses
3.3 V _{in}	800mA
5 V _{in}	500mA
12, 15, 24 V _{in}	300mA


Loading vs. output

LOADING VS OUTPUT VOLTAGE

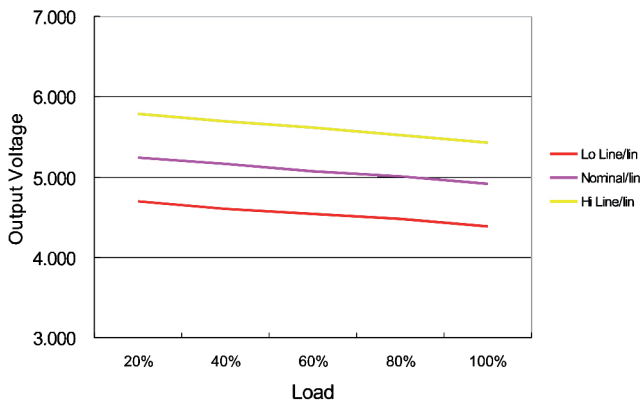


1S7BE_05yy type

LOADING VS OUTPUT VOLTAGE

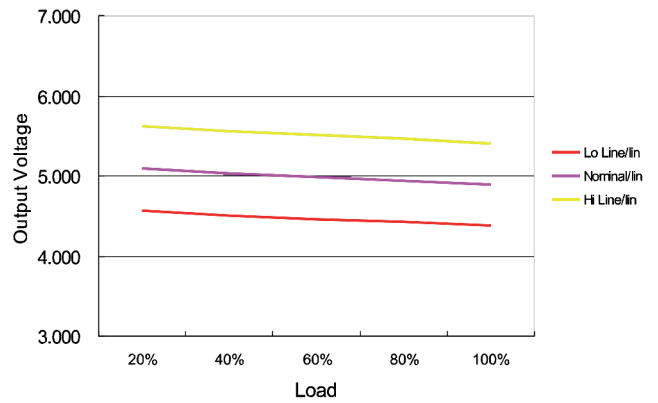


1S7BE_12yy type

LOADING VS OUTPUT VOLTAGE

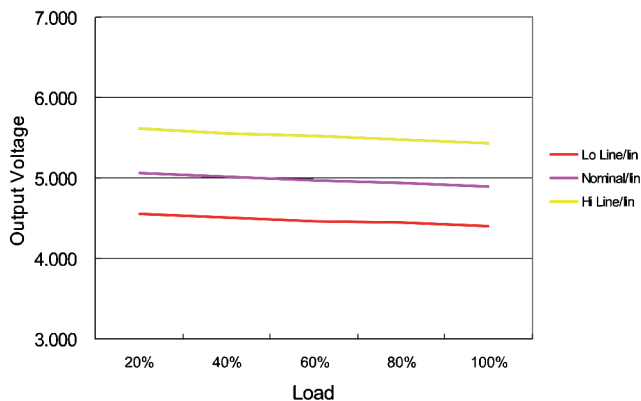

1S7BE_24yy type

LOADING VS OUTPUT VOLTAGE

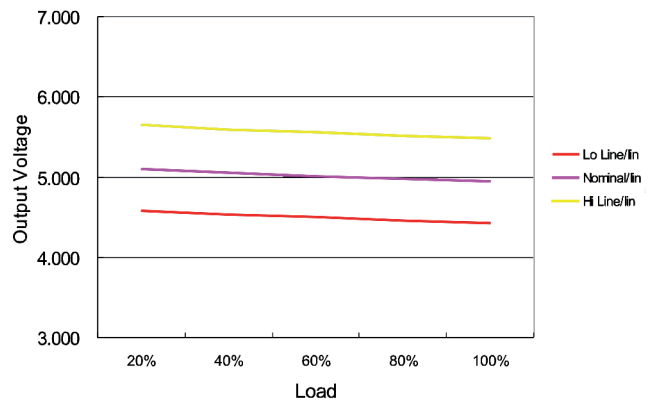


1S7BE_48yy type

1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

EMI filter

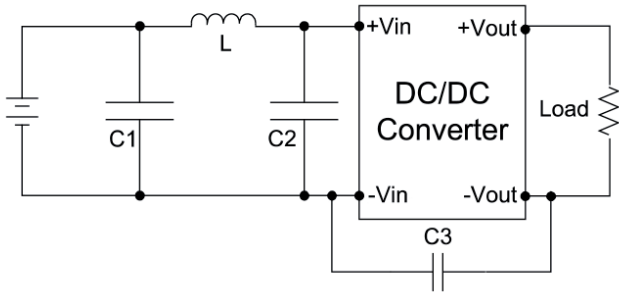


Model	C1	L	C2	C3
1S7BE_03xx3U	1210, 2.2μF/100V	18μH		
1S7BE_05xx3U	1210, 2.2μF/100V	18μH		
1S7BE_12xx3U	1210, 2.2μF/100V	18μH		
1S7BE_15xx3U	1210, 2.2μF/100V	18μH		
1S7BE_24xx3U	1210, 2.2μF/100V	18μH	1210, 2.2μF/100V	1206, 470pF/2KV
1S7BE_48xx3U	Electrolytic capacitor, 10μF/100V	18μH	1210, 2.2μF/100V	1206, 470pF/2KV

Input filter components (C1, L, C2, C3) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

EFT/surge filter

Input filter components (C1, D1) are used to help meet IEC 61000-4-4 and IEC 61000-4-5.

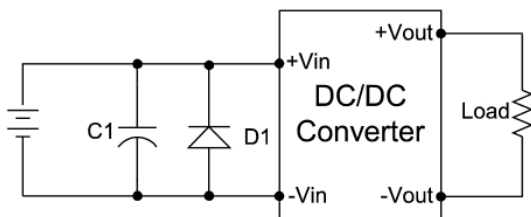


SIP models

SIP	C1	D1
1S7BE_03xx3U	2200μF/100V	SMAJ5A
1S7BE_05xx3U	2200μF/100V	SMAJ6.5A
1S7BE_12xx3U	2200μF/100V	SMAJ14A
1S7BE_15xx3U	2200μF/100V	SMAJ18A
1S7BE_24xx3U	2200μF/100V	SMAJ26A

Output ripple & noise reduction



To reduce ripple and noise, it is recommended to use a 10μF electrolytic capacitor at the output.

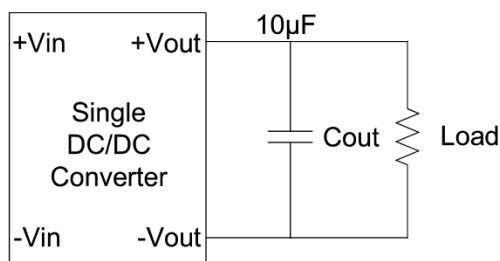


1S7BE_3U series

1W - Single/Dual Output DC-DC Converter - Fixed Input - Isolated & Unregulated

Mechanical dimensions

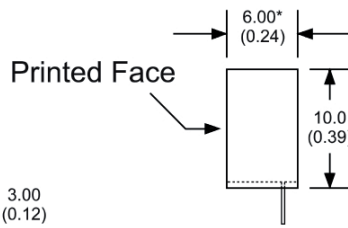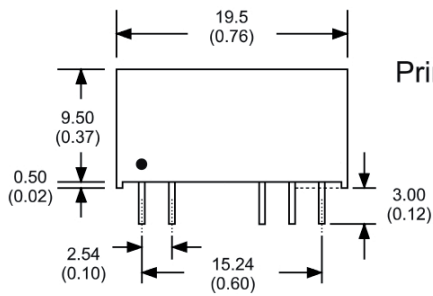

* The thickness of 48V input voltage model is 7.20(0.28)

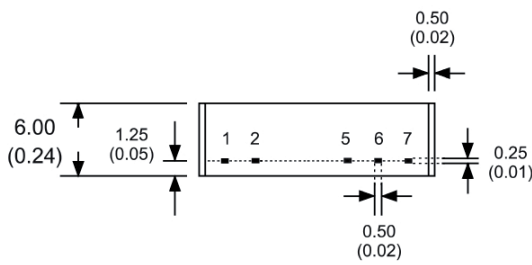

Pin connections		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	N.P.	Common
7	+Vout	+Vout

All dimensions are typical in mm (inch)
 Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 Pin pitch and length tolerance: ± 0.35 (± 0.014)
 Case tolerance: ± 0.5 (± 0.02)