
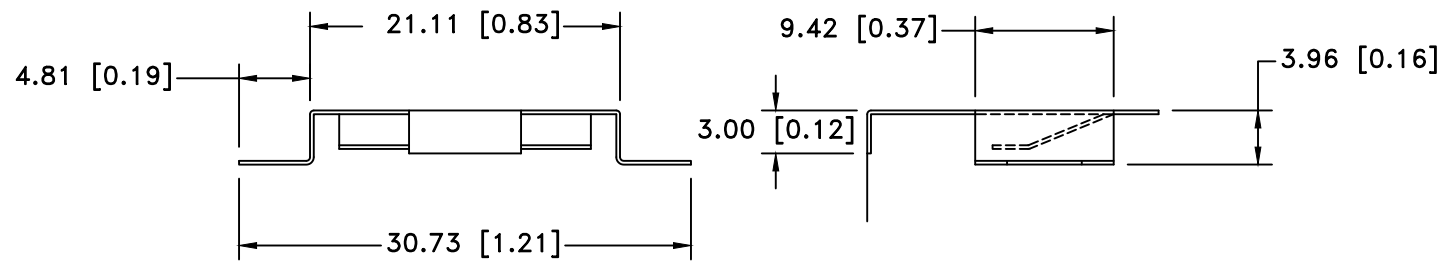
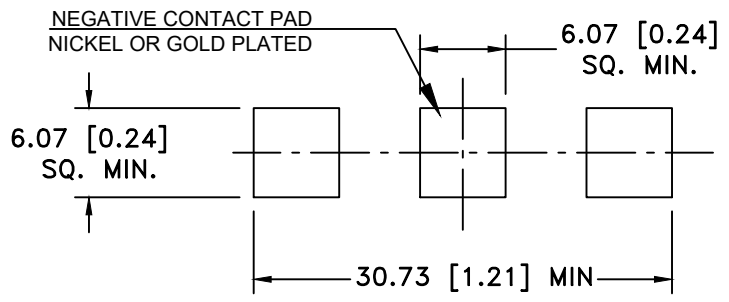


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/03/17	K	ADDED NEG. CONTACT PAD INFORMATION	T.B.	B.S.	
10/18/19	L	ADDED WEIGHT OF THE PART	T.B.	B.S.	
09/01/22	M	UPDATED NOTES	T.B.	B.S.	

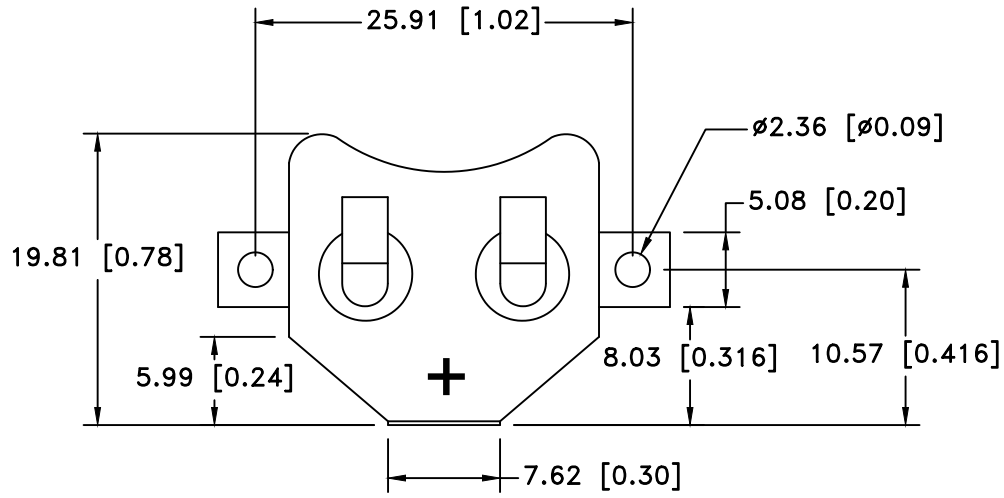

NOTES:

- 1. MATERIAL:
0.25mm PHOSPHOR BRONZE 1/2H, NICKEL PLATED
TEMPERATURE RANGE: -40°C TO +260°C
- * VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS
X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
- * RESULT: NO DISLODGEEMENT OF THE CELL OR DAMAGE
NO DISCONTINUITY OVER 10 MICRO-SECONDS
- * SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
6 MILLISECONDS
1 SHOCK PULSES EACH DIRECTION PER AXIS
- * RESULT: NO EVIDENCE OF PHYSICAL DAMAGE

ROHS COMPLIANT

Weight: 1.02g

CELL SIZE	RETAINS BATTERY NUMBERS
20mm	BR2032, CR2032, DL2032, LIR 2032, BR2025, CR2025, DL2025, LIR 2025

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
	Approved By T.B.		
Fractional ± .8 (.030)	Title COIN CELL RETAINER FOR 20mm DIA. BATTERIES		
Angular ± 3°	Date 09/01/22	Drawing Number BK-883	