
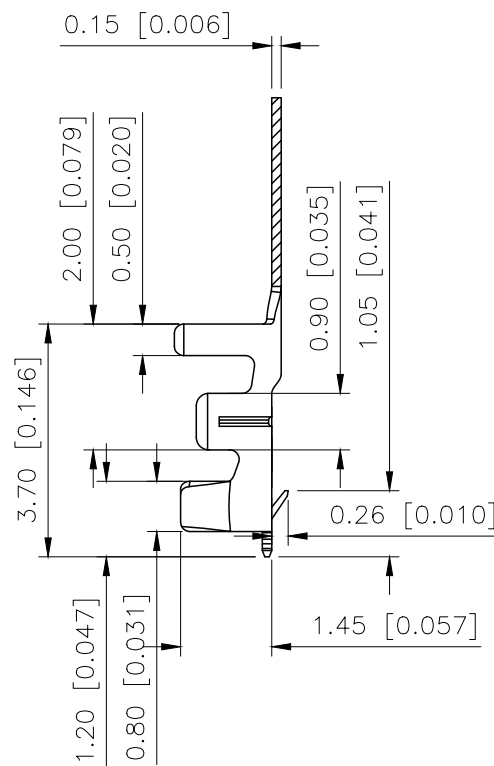


| REVISIONS | | | | | |
|-----------|---------|----------|-----------------|-----------|--------|
| REV. | ECN NO. | LOCATION | DESCRIPTION | DATE | DESIGN |
| A0 | N/A | | INITIAL RELEASE | / | / |
| A1 | N/A | | 图面升级整理图面 | 2024.9.19 | 阿树 |



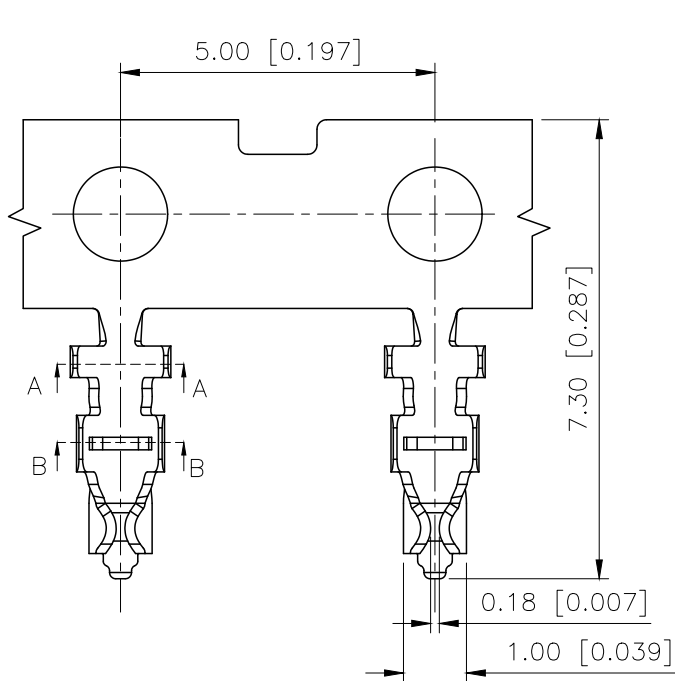


- SPECIFICATIONS
- Voltage rating: 150V AC/DC
 - Current rating: 1A AC/DC
 - Withstanding Voltage: 500V AC/minute
 - Temperature range: -40°C ~ +125°C
 - Insulation resistance: $\geq 500\text{M}\Omega$
 - Contact resistance: $\leq 30\text{m}\Omega$

PART NO.:

X9812 T-P SN-L
① ② ③ ④ ⑤

- ① Series Number.
- ② Category: T-terminal
- ③ Material: P-Phosphor bronze
- ④ Planting style: SN-Bright tin plating
- ⑤ Type: L

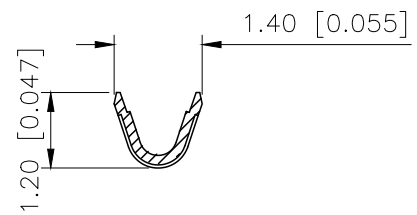

| | | | |
|--------------|-----------------|------------------------|-------------------------|
| X9812T-PSN-L | Phosphor Bronze | AWG#26~30 O.D.1.0mm | X9812H |
| PART NO | Material | Wire Range | Suitable XKB Housing |

| | |
|------------------------|---------------|
| AuGLAR | $\pm 5^\circ$ |
| X. | ± 0.40 |
| X.x | ± 0.30 |
| X.xx | ± 0.20 |
| X.xxx | ± 0.15 |
| UNSPECIFIED TOLERANCES | |



| | | | | | |
|----------|----|-------|-------|-------------|------------------------------|
| DESIGN | 阿树 | VIEW: | | MODEL TYPE: | 1.25mm Crimp Style Connector |
| CHECKED | | UNIT: | mm/in | PART NO.: | X9812T-PSN-L |
| APPROVED | | SIZE: | A4 | DWG NO.: | |