


# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, nom. voltage: 800 V, nominal current: 50 A, connection method: Bolt connection, Rated cross section: 10 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- The disconnect slide is secured with a hexagonal slotted-head screw

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3076714       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Sales key                            | BE44          |
| Product key                          | BE4433        |
| GTIN                                 | 4046356662215 |
| Weight per piece (including packing) | 35 g          |
| Weight per piece (excluding packing) | 33.75 g       |
| Customs tariff number                | 85369010      |
| Country of origin                    | IN            |

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Technical data

### Product properties

|                       |                                |
|-----------------------|--------------------------------|
| Product type          | Bolt connection terminal block |
| Pitch                 | 13 mm                          |
| Number of connections | 2                              |
| Number of rows        | 1                              |
| Potentials            | 1                              |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 8 kV   |
| Maximum power dissipation for nominal condition | 1.82 W |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 6 mm <sup>2</sup> |

### Level 1 above 1 below 1

|                                  |                                                                                           |
|----------------------------------|-------------------------------------------------------------------------------------------|
| Screw thread                     | M5                                                                                        |
| Stripping length                 | The stripping length depends on the specification provided by the cable lug manufacturer. |
| Connection in acc. with standard | IEC 60947-7-1                                                                             |
| Nominal current                  | 50 A                                                                                      |
| Maximum load current             | 50 A (with 10 mm <sup>2</sup> conductor cross section)                                    |
| Nominal voltage                  | 800 V (with open 630 V disconnect point)                                                  |
| Nominal cross section            | 10 mm <sup>2</sup>                                                                        |

### Cable lug connection DIN 46234:1980-03

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Connection in acc. with standard | DIN 46234:1980-03                          |
| Cross section                    | 0.1 mm <sup>2</sup> ... 10 mm <sup>2</sup> |
| Cross section range AWG          | 26 ... 8 (converted acc. to IEC)           |
| Hole diameter                    | 5.3 mm                                     |
| Width                            | 10 mm                                      |
| Bolt diameter                    | 5 mm                                       |
| Tightening torque                | 2 ... 2.2 Nm                               |
| Connection in acc. with standard | DIN 46237:1970-07                          |
| Cross section                    | 0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>  |
| Cross section range AWG          | 20 ... 10 (converted acc. to IEC)          |
| Hole diameter                    | 5.3 mm                                     |
| Width                            | 10 mm                                      |
| Bolt diameter                    | 5 mm                                       |

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

|                                                  |                     |
|--------------------------------------------------|---------------------|
| Tightening torque                                | 2 ... 2.2 Nm        |
| Identification color of ring cable lugs : red    | 1 mm <sup>2</sup>   |
| Identification color of ring cable lugs : blue   | 2.5 mm <sup>2</sup> |
| Identification color of ring cable lugs : yellow | 6 mm <sup>2</sup>   |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 13 mm   |
| End cover width    | 2.2 mm  |
| Height             | 80.8 mm |
| Depth on NS 35/7,5 | 49.8 mm |
| Depth on NS 35/15  | 57.3 mm |
| Pitch              | 13 mm   |

## Material specifications

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Color                                                                   | gray        |
| Flammability rating according to UL 94                                  | V0          |
| Insulating material group                                               | I           |
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 9.8 kV      |
| Result                | Test passed |

### Temperature-rise test

|                                                 |                                |
|-------------------------------------------------|--------------------------------|
| Requirement temperature-rise test               | Increase in temperature ≤ 45 K |
| Result                                          | Test passed                    |
| Short-time withstand current 10 mm <sup>2</sup> | 1.2 kA                         |
| Result                                          | Test passed                    |

### Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 2 kV        |
| Result                | Test passed |

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 32/NS 35 |
| Test force setpoint     | 5 N         |
| Result                  | Test passed |

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03                 |
| Spectrum               | Service life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$      |
| ASD level              | $1.857 \text{ (m/s}^2\text{)}^2\text{/Hz}$          |
| Acceleration           | 0.8g                                                |
| Test duration per axis | 5 h                                                 |
| Test directions        | X-, Y- and Z-axis                                   |
| Result                 | Test passed                                         |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

### Ambient conditions

|                                         |                                                                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)         | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)          | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)         | -5 °C ... 70 °C                                                                                                              |

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

|                                          |               |
|------------------------------------------|---------------|
| Permissible humidity (operation)         | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |
| Screw thread  | M4        |

# RBO 5-T-B-HEX - Test disconnect terminal block




3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Drawings

Circuit diagram

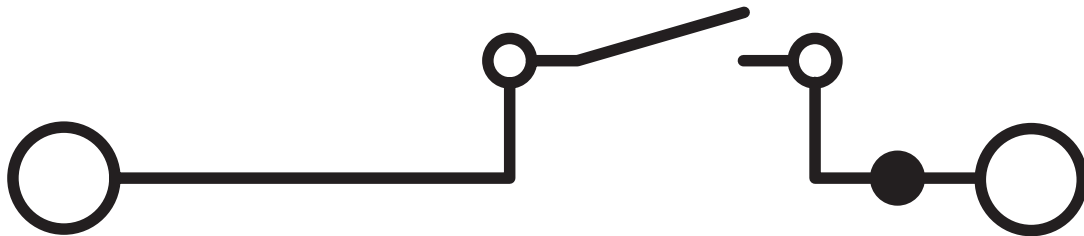

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3076714>

|                                                                                                                                      |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cUL Recognized</b><br>Approval ID: FILE E 60425 |                       |                       |                   |                             |
|                                                                                                                                      | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                          |                       |                       |                   |                             |
|                                                                                                                                      | 600 V                 | 41 A                  | -                 | -                           |
| Use group C                                                                                                                          |                       |                       |                   |                             |
|                                                                                                                                      | 600 V                 | 41 A                  | -                 | -                           |

|                                                                                                                                     |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>UL Recognized</b><br>Approval ID: FILE E 60425 |                       |                       |                   |                             |
|                                                                                                                                     | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                         |                       |                       |                   |                             |
|                                                                                                                                     | 600 V                 | 41 A                  | -                 | -                           |
| Use group C                                                                                                                         |                       |                       |                   |                             |
|                                                                                                                                     | 600 V                 | 41 A                  | -                 | -                           |

|                                                                                                                                     |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>EAC</b><br>Approval ID: RU C-DE.BL08.B.00540 |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|                         |  |  |  |  |
|-------------------------|--|--|--|--|
| <b>cULus Recognized</b> |  |  |  |  |
|-------------------------|--|--|--|--|

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141126 |
| ECLASS-12.0 | 27141126 |
| ECLASS-13.0 | 27250101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000902 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FB 10-13 - Fixed bridge

3059126

<https://www.phoenixcontact.com/us/products/3059126>



Fixed bridge, pitch: 13 mm, number of positions: 10, color: silver

**i** Max. current carrying capacity: 57 A

with 41 A bridging between non-adjacent term. blocks

### FB 10-13 ISO - Fixed bridge

3059663

<https://www.phoenixcontact.com/us/products/3059663>



Fixed bridge, pitch: 13 mm, number of positions: 10, color: silver

**i** Max. current carrying capacity: 24 A

## RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/us/products/2770215>



Separating plate, depth: 16 mm, width: 0.5 mm, height: 14 mm, color: gray

---

## AP RSC-T - Cover profile

3059139

<https://www.phoenixcontact.com/us/products/3059139>



Cover profile, for covering terminal strips, directly snapped onto RBO... and RSC... test disconnect terminal blocks. Length supplied: 1 m

## RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## D-RSC 5-T - End cover

3058046

<https://www.phoenixcontact.com/us/products/3058046>

End cover, depth: 39.7 mm, width: 2.2 mm, height: 80.9 mm, color: gray



---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

## RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# RBO 5-T-B-HEX - Test disconnect terminal block

3076714

<https://www.phoenixcontact.com/us/products/3076714>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

## RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

### ZB 13:UNBEDRUCKT - Zack marker strip

0829131

<https://www.phoenixcontact.com/us/products/0829131>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 13 mm, lettering field size: 13 x 10.5 mm, Number of individual labels: 5

---

### ZB 13 CUS - Zack marker strip

0829132

<https://www.phoenixcontact.com/us/products/0829132>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 13 mm, lettering field size: 13 x 10.5 mm, Number of individual labels: 5

## RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

### ZBF 13:UNBEDRUCKT - Zack Marker strip, flat

0829133

<https://www.phoenixcontact.com/us/products/0829133>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 13 mm, lettering field size: 13 x 5.2 mm, Number of individual labels: 5

---

### ZBF 13 CUS - Zack Marker strip, flat

0829134

<https://www.phoenixcontact.com/us/products/0829134>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 13 mm, lettering field size: 13 x 5.2 mm, Number of individual labels: 5

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



---

## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



# RBO 5-T-B-HEX - Test disconnect terminal block



3076714


<https://www.phoenixcontact.com/us/products/3076714>

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

---

## SZS 1,2X8,0 VDE - Screwdriver

1205082

<https://www.phoenixcontact.com/us/products/1205082>



Screwdriver, slot-headed, VDE insulated, size: 1.2 x 8.0 x 175 mm, 2-component grip, with non-slip grip

# RBO 5-T-B-HEX - Test disconnect terminal block



3076714

<https://www.phoenixcontact.com/us/products/3076714>

## TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/us/products/3072821>

Separating plate, depth: 67.5 mm, width: 1 mm, height: 105.2 mm, color: gray



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)