

SN54HC194, SN74HC194 4-BIT BIDIRECTIONAL UNIVERSAL SHIFT REGISTERS

D2684, DECEMBER 1982—REVISED JUNE 1989

2

HCMOS Devices

- Parallel Inputs and Outputs
- Four Operating Modes:
 - Synchronous Parallel Load
 - Right Shift
 - Left Shift
 - Do Nothing
- Positive Edge-Triggered Clocking
- Direct Overriding Clear
- Package Options: Plastic and Ceramic DIPs and Ceramic Chip Carriers
- Dependable Texas Instruments Quality and Reliability

description

These bidirectional shift registers are designed to incorporate virtually all of the features a system designer may want in a shift register. The circuit features parallel inputs, parallel outputs, right-shift and left-shift inputs, operating-mode-control inputs, and a direct overriding clear line. The register has four distinct modes of operation, namely:

- Parallel (broadside) load
- Shift right (in the direction Q_A toward Q_D)
- Shift left (in the direction Q_D toward Q_A)
- Inhibit clocking (do nothing).

Synchronous parallel loading is accomplished by applying the 4 bits of data and taking both mode control inputs, S0 and S1, high. The data are loaded into the associated flip-flops and appear at the outputs after the positive transition of the clock input. During loading, serial data flow is inhibited.


Shift right is accomplished synchronously with the rising edge of the clock pulse when S0 is high and S1 is low. Serial data for this mode is entered at the shift-right data input. When S0 is low and S1 is high, data shifts left synchronously, and new data is entered at the shift-left serial input.

Clocking of the shift register is inhibited when both mode control inputs are low.


The SN54HC194 is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74HC194 is characterized for operation from -40°C to 85°C.

SN54HC194 . . . J PACKAGE
SN74HC194 . . . N PACKAGE

(TOP VIEW)




SN54HC194 . . . FK PACKAGE
(TOP VIEW)



NC—No internal connection

logic symbol†

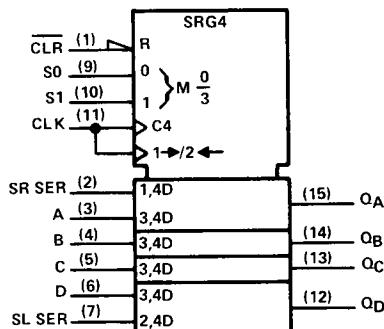

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for J and N packages.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1989, Texas Instruments Incorporated

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

SN54HC194, SN74HC194
4-BIT BIDIRECTIONAL UNIVERSAL SHIFT REGISTERS

2

HCMOS Devices

logic diagram (positive logic)

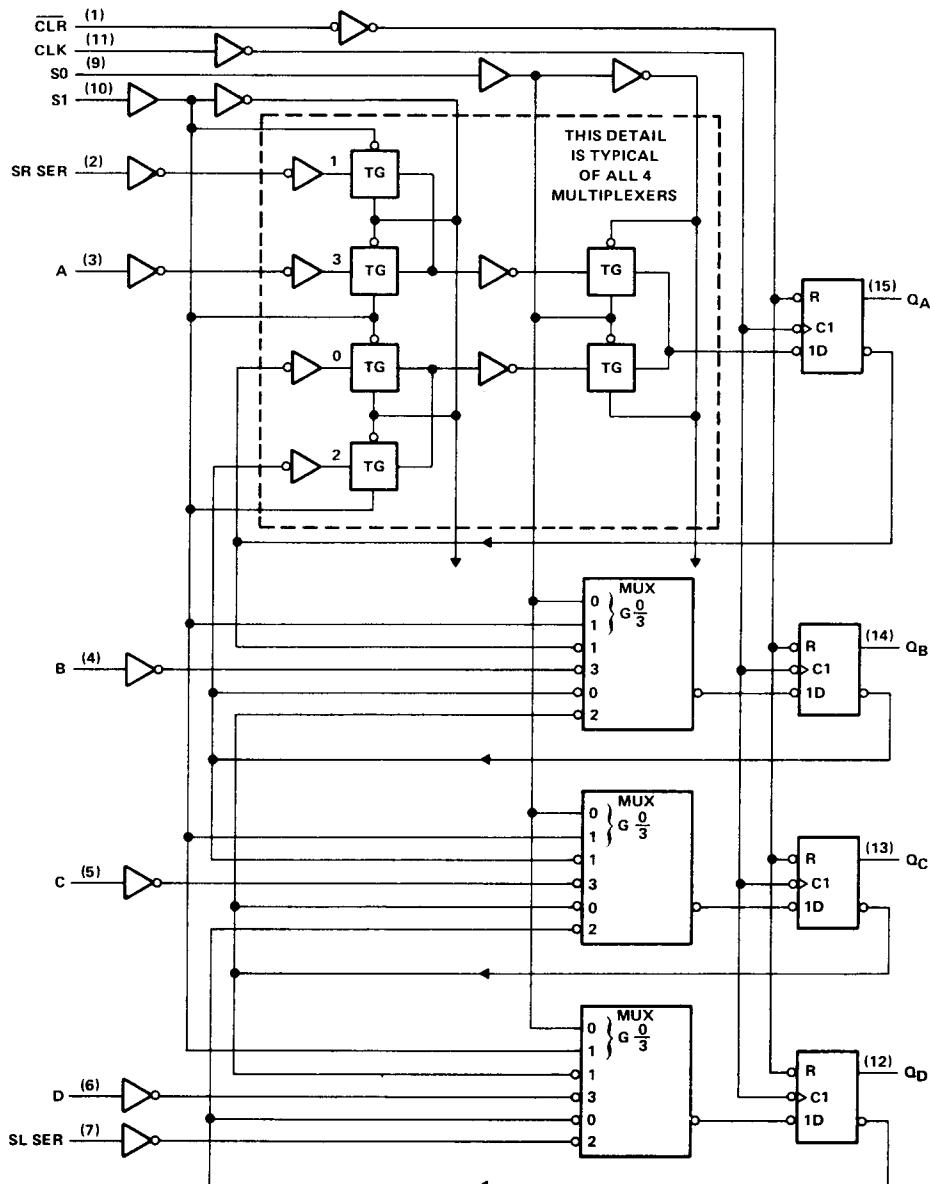

SN54HC194, SN74HC194
4-BIT BIDIRECTIONAL UNIVERSAL SHIFT REGISTERS


2

HCMOS Devices

FUNCTION TABLE

CLEAR	MODE		CLOCK	INPUTS		OUTPUTS							
	S1	S0		LEFT	RIGHT	A	B	C	D	QA	QB	QC	QD
L	X	X	X	X	X	X	X	X	L	L	L	L	
H	X	X	L	X	X	X	X	X	X	QA0	QB0	QC0	QD0
H	H	H	I	X	X	a	b	c	d	a	b	c	d
H	L	H	I	X	H	X	X	X	X	H	QA _n	QB _n	QC _n
H	L	H	I	X	L	X	X	X	X	L	QA _n	QB _n	QC _n
H	H	L	I	H	X	X	X	X	X	QB _n	QC _n	QD _n	H
H	H	L	I	L	X	X	X	X	X	QB _n	QC _n	QD _n	L
H	L	L	X	X	X	X	X	X	X	QA _n	QB _n	QC _n	QD _n

typical clear, load, right-shift, left-shift, inhibit, and clear sequences

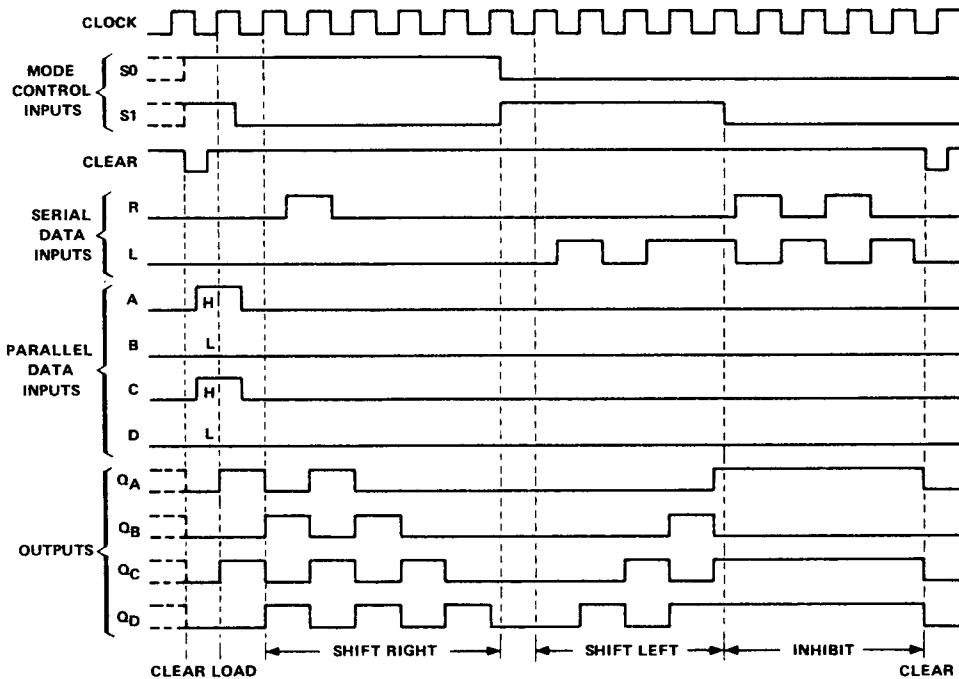

SN54HC194, SN74HC194 4-BIT BIDIRECTIONAL UNIVERSAL SHIFT REGISTERS

2

HCMOS Devices

absolute maximum ratings over operating free-air temperature range[†]

Supply voltage, V _{CC}	-0.5 V to 7 V
Input clamp current, I _{IJK} (V _I < 0 or V _I > V _{CC})	±20 mA
Output clamp current, I _{OK} (V _O < 0 or V _O > V _{CC})	±20 mA
Continuous output current, I _O (V _O = 0 to V _{CC})	±25 mA
Continuous current through V _{CC} or GND pins	±50 mA
Lead temperature 1.6 mm (1/16 in) from case for 60 s: FK or J package	300°C
Lead temperature 1.6 mm (1/16 in) from case for 10 s: N package	260°C
Storage temperature range	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

		SN54HC194			SN74HC194			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	2	5	6	2	5	6	V
V _{IH}	High-level input voltage	V _{CC} = 2 V	1.5		1.5			
		V _{CC} = 4.5 V	3.15		3.15			
		V _{CC} = 6 V	4.2		4.2			
V _{IL}	Low-level input voltage	V _{CC} = 2 V	0	0.3	0	0.3		
		V _{CC} = 4.5 V	0	0.9	0	0.9		
		V _{CC} = 6 V	0	1.2	0	1.2		
V _I	Input voltage		0	V _{CC}	0	V _{CC}		V
V _O	Output voltage		0	V _{CC}	0	V _{CC}		V
t _t	Input transition (rise and fall) times	V _{CC} = 2 V	0	1000	0	1000		ns
		V _{CC} = 4.5 V	0	500	0	500		
		V _{CC} = 6 V	0	400	0	400		
T _A	Operating free-air temperature		-55	125	-40	85		°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			SN54HC194		SN74HC194		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	V _I = V _{IH} or V _{IL} , I _{OH} = -20 µA	2 V	1.9	1.998		1.9		1.9		V
		4.5 V	4.4	4.499		4.4		4.4		
		6 V	5.9	5.999		5.9		5.9		
	V _I = V _{IH} or V _{IL} , I _{OH} = -4 mA	4.5 V	3.98	4.30		3.7		3.84		
V _{OL}	V _I = V _{IH} or V _{IL} , I _{OL} = 20 µA	2 V	0.002	0.1		0.1		0.1		V
		4.5 V	0.001	0.1		0.1		0.1		
		6 V	0.001	0.1		0.1		0.1		
	V _I = V _{IH} or V _{IL} , I _{OL} = 4 mA	4.5 V	0.17	0.26		0.4		0.33		
I _I	V _I = V _{CC} or 0	6 V	0.15	0.26		0.4		0.33		nA
		6 V	±0.1	±100		±1000		±1000		
I _{CC}	V _I = V _{CC} or 0, I _O = 0	6 V		8		160		80		µA
C _i		2 to 6 V	3	10		10		10		pF

SN4HC194, SN74HC194
4-BIT BIDIRECTIONAL UNIVERSAL SHIFT REGISTERS

timing requirements over recommended operating free-air temperature range (unless otherwise noted)

		V _{CC}	T _A = 25°C			SN54HC194		SN74HC194		UNIT	
			MIN	MAX	MIN	MAX	MIN	MAX			
f _{clock}	Clock frequency		2 V	0	6	0	4.2	0	5	MHz	
			4.5 V	0	31	0	21	0	25		
			6 V	0	36	0	25	0	29		
t _w	Pulse duration	CLK high or low	2 V	80		120		100		ns	
			4.5 V	16		24		20			
			6 V	14		20		17			
	CLR low	CLR low	2 V	80		120		100			
			4.5 V	16		24		20			
			6 V	14		20		17			
t _{su}	Setup time, any input before CLK↑		2 V	100		150		125		ns	
			4.5 V	20		30		25			
			6 V	17		26		21			
t _h	Hold time, data after CLK↑		2 V	0		0		0		ns	
			4.5 V	0		0		0			
			6 V	0		0		0			

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), C_L = 50 pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			SN54HC194		SN74HC194		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f _{max}			2 V	6			4.2		5		MHz
				4.5 V	31		21		25		
				6 V	36		25		29		
t _{PHL}	CLR	Any	2 V	67	150		225		190		ns
				4.5 V	17	30	45		38		
				6 V	14	26	37		31		
t _{pd}	CLK	Any	2 V	67	145		220		180		ns
				4.5 V	17	29	44		36		
				6 V	14	25	37		31		
t _t		Any	2 V	28	75		110		95		ns
				4.5 V	8	15	22		19		
				6 V	6	13	19		16		

C _{pd}	Power dissipation capacitance	No load, T _A = 25°C	65 pF typ
-----------------	-------------------------------	--------------------------------	-----------

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.