


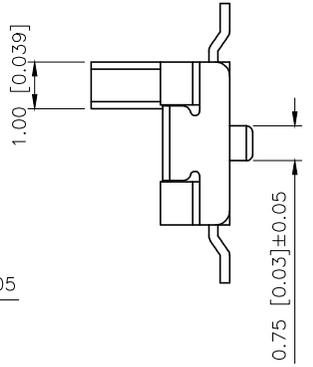
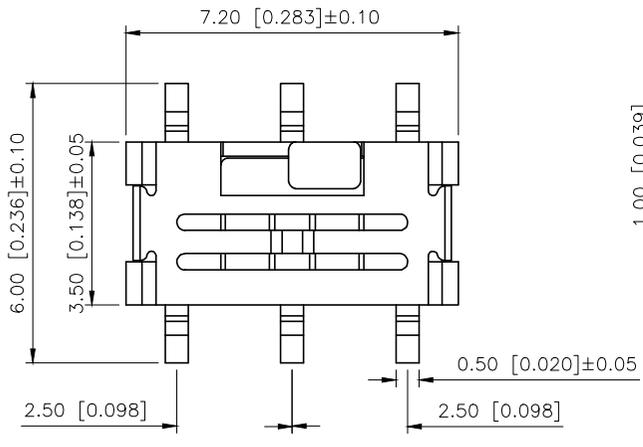
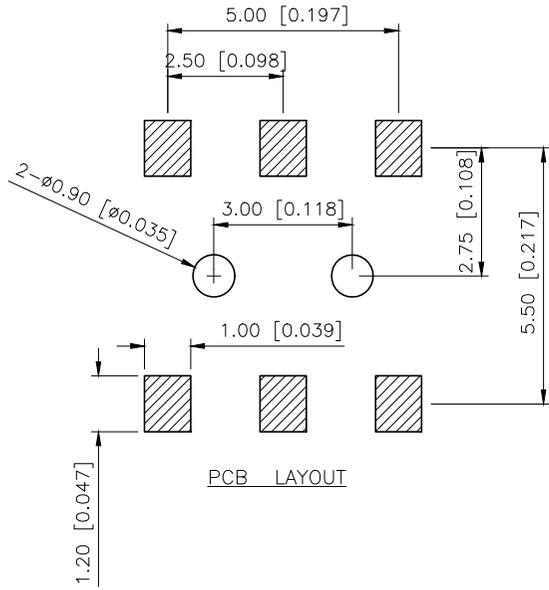


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

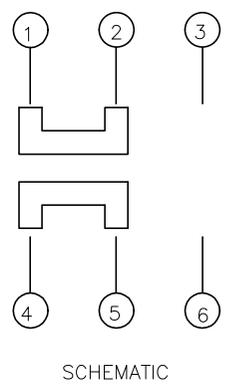

NOTE:
 Rating:DC 12V 50mA
 Operating Force:200±100gf
 Lifetime:10 000 Cycles

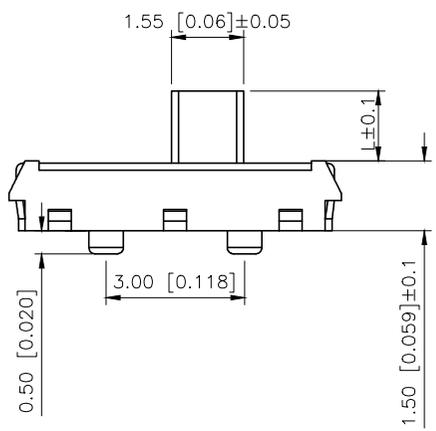

PAPT NO	L
SS-3390S-L0	1.0
SS-3390S-L1	1.5
SS-3390S-L2	2.0
SS-3390S-L3	3.0

ITEM	PAPT NAME	QTY	MATERIAL	FINISHING
5	Terminal	6	Brass (0.30t)	Ag Plated
4	Contact spring	1	Phosphor bronze	Ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SS-3390S-X
APPROVED		SIZE:	A4	DWG NO.:	