


MOLEX P/N	LENGTH [M]	TOL [mm]	AWG
747521258	2.5	±50	30
747521308	3.0	±50	30
747521408	4.0	±50	30
747521508	5.0	±80	30
747521108	1.0	±50	30
747521158	1.5	±50	30
747521208	2.0	±50	30

- NOTES:
- MATERIALS
 RAW CABLE - PVC
 BACKSHELLS - NICKEL PLATED ZINC
 DE-LATCH - PLASTIC
 PULL - NYLON
 PCB - HALOGEN FREE LAMINATE MATERIAL
 - IMPEDANCE - 100OHMS DIFFERENTIAL
 - RoHS COMPLIANT, NO EXEMPTIONS
 - EEPROM COMPLIANT TO SFF-8472 REV 11.0

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_D = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.		<p>SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY</p> <p>PRODUCT SALES DRAWING</p>
	DIMENSION UNITS	SCALE	STATUS: Production		
	mm	2:1	DRWN: ANIKETHAN SS		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: Ganesh Rao B		
ANGULAR TOL ± 2'		APPR: Gurunandan GA		2023-07-19	DOCUMENT NUMBER
4 PLACES ±		2023-08-04		2023-08-04	747520008
3 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DOC TYPE
2 PLACES ± 0.130		DRAWING		D-SIZE	PSD
1 PLACE ± 0.25		SERIES		74752	DOC PART
0 PLACES ±		MATERIAL NUMBER		SEE TABLE	000
		CUSTOMER		GENERAL MARKET	REVISION
		SHEET NUMBER		1 OF 3	

CABLE BEND RADIUS

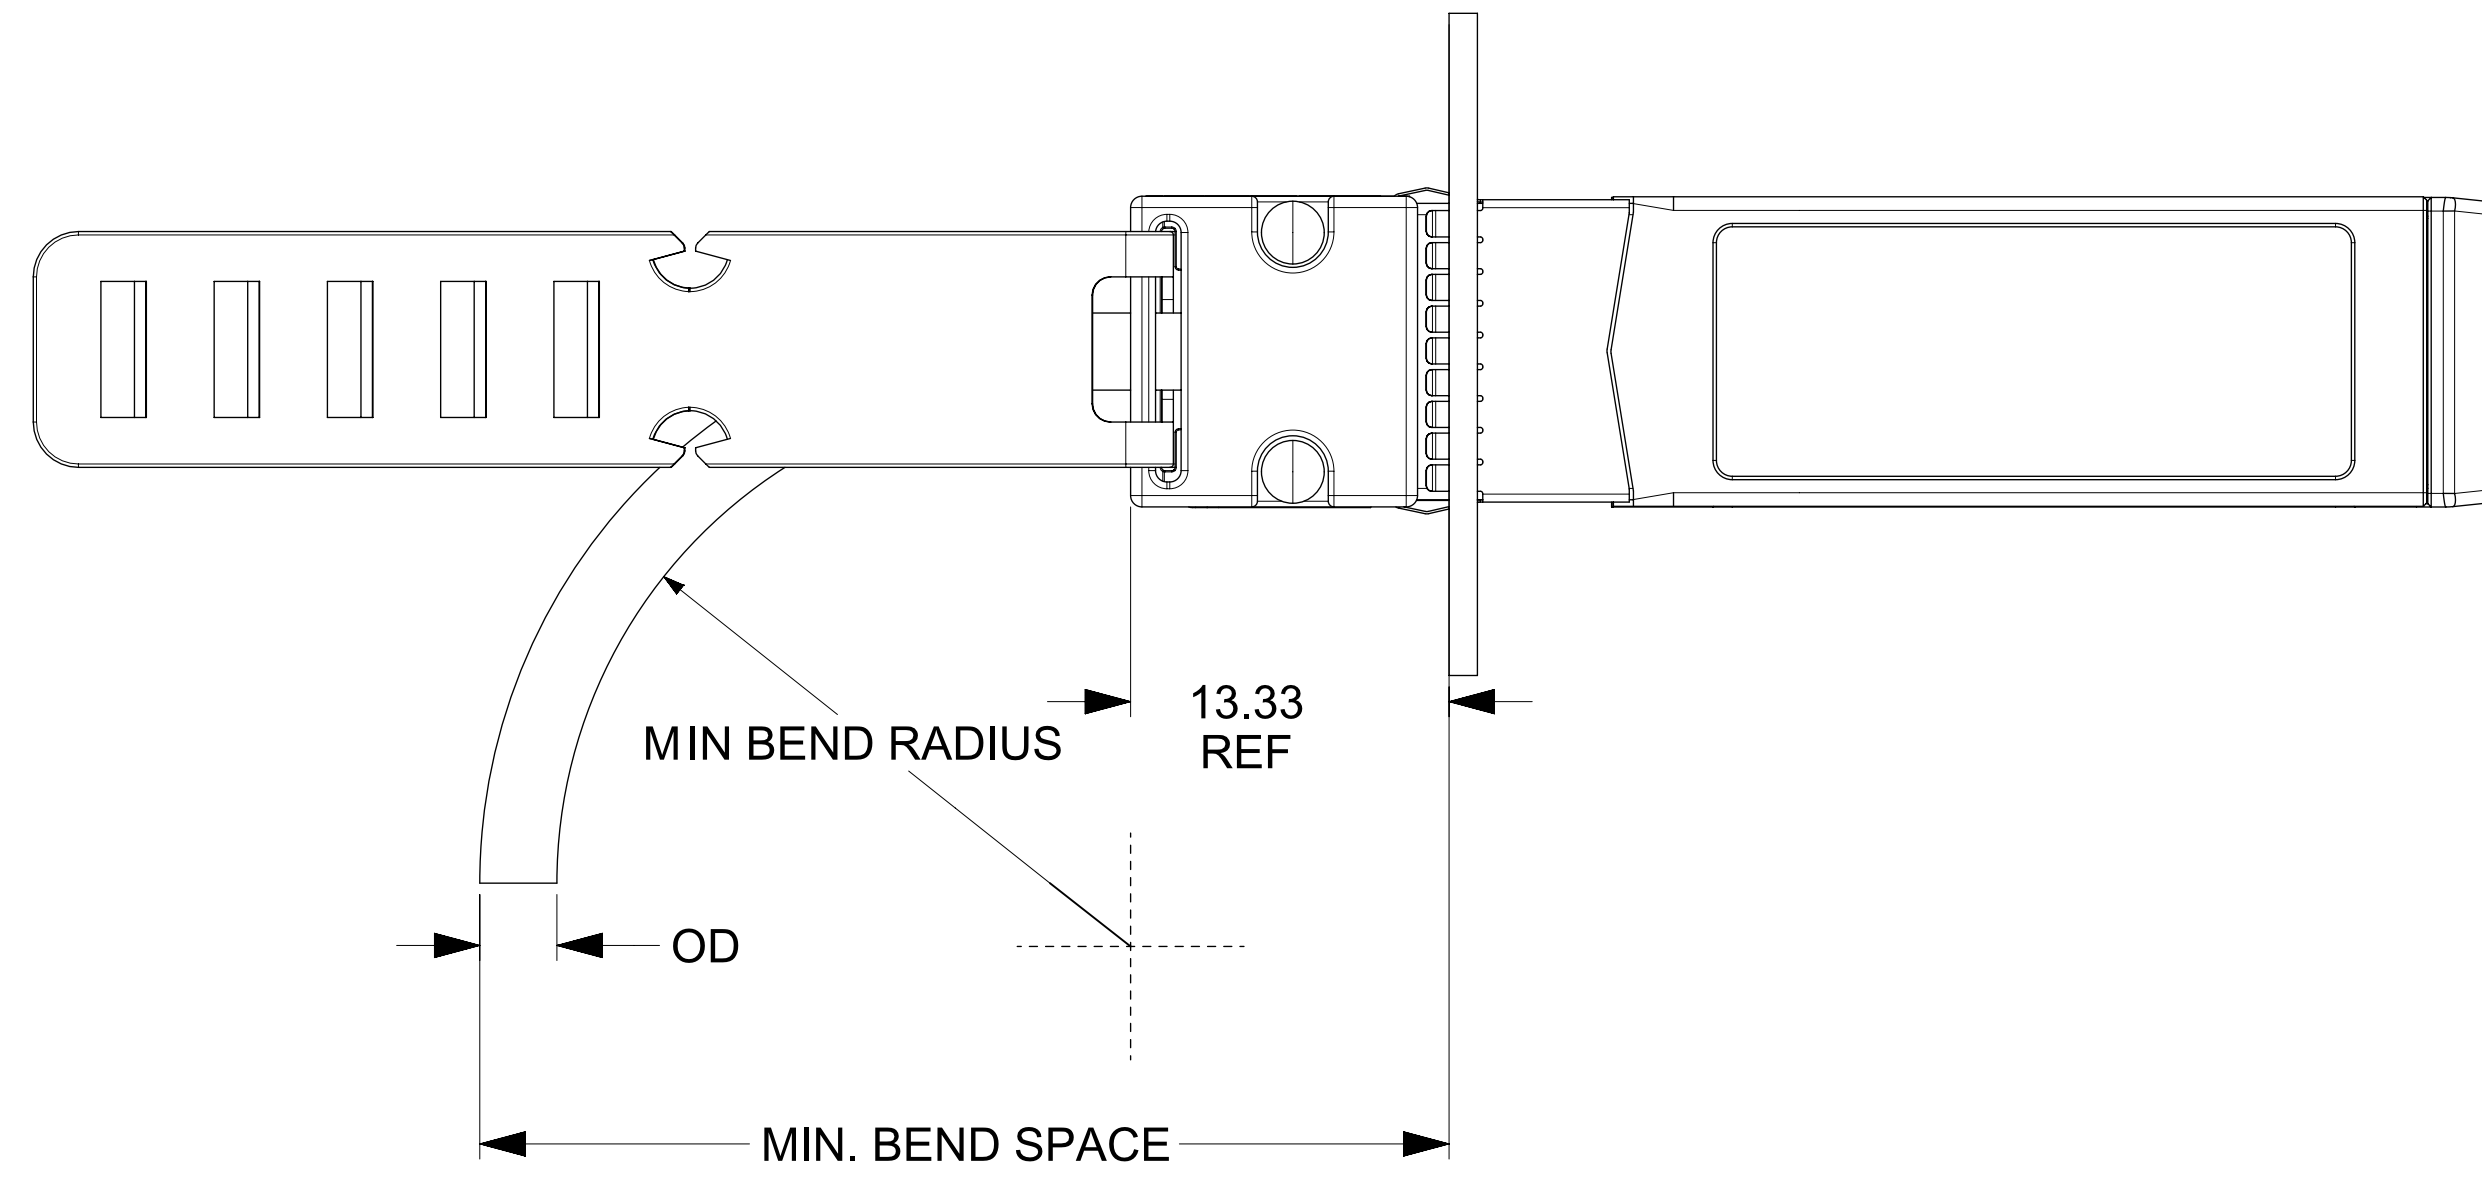


CABLE AWG	CABLE OD [mm]	MINIMUM BEND RADIUS [mm]	MINIMUM BEND SPACE [mm]
30	4.20	21	38
26	5.20	26	44

P1 END			P2 END		
PAD	SIGNAL		PAD	SIGNAL	
12	RD-	←	19	TD-	
13	RD+	←	18	TD+	
18	TD+	→	13	RD+	
19	TD-	→	12	RD-	
02	Tx_Fault	NC NC	02	Tx_Fault	
03	Tx_Disable	NC NC	03	Tx_Disable	
04	SDA	■ ■	04	SDA	
05	SCL	■ ■	05	SCL	
06	Mod_ABS	NC NC	06	Mod_ABS	
07	RS0	NC NC	07	RS0	
08	Rx_LOS	NC NC	08	Rx_LOS	
09	RS1	NC NC	09	RS1	
15	VccR	NC NC	15	VccR	
16	VccT	NC NC	16	VccT	

- LEGEND:**
- - THRU LINES
 - NC - NOT CONNECTED
 - - CONNECTION TO A DEVICE ON THE PCB

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FP = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.		
	mm	SCALE 3:1	<p>SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY</p> <p>PRODUCT SALES DRAWING</p>		
	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	ANGULAR TOL ± 2°				
	4 PLACES ±				
3 PLACES ±					
2 PLACES ± 0.130		STATUS: Production		2023-07-19	
1 PLACE ± 0.25		DRWN: ANIKETHAN SS		2023-08-04	
0 PLACES ±		CHK'D: Ganesh Rao B		2023-08-04	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING D-SIZE	SERIES 74752	DOCUMENT NUMBER 747520008
					DOC TYPE PSD
					DOC PART 000
					REVISION I
					MATERIAL NUMBER SEE TABLE
					CUSTOMER GENERAL MARKET
					SHEET NUMBER 2 OF 3

CABLE LABEL DETAILS

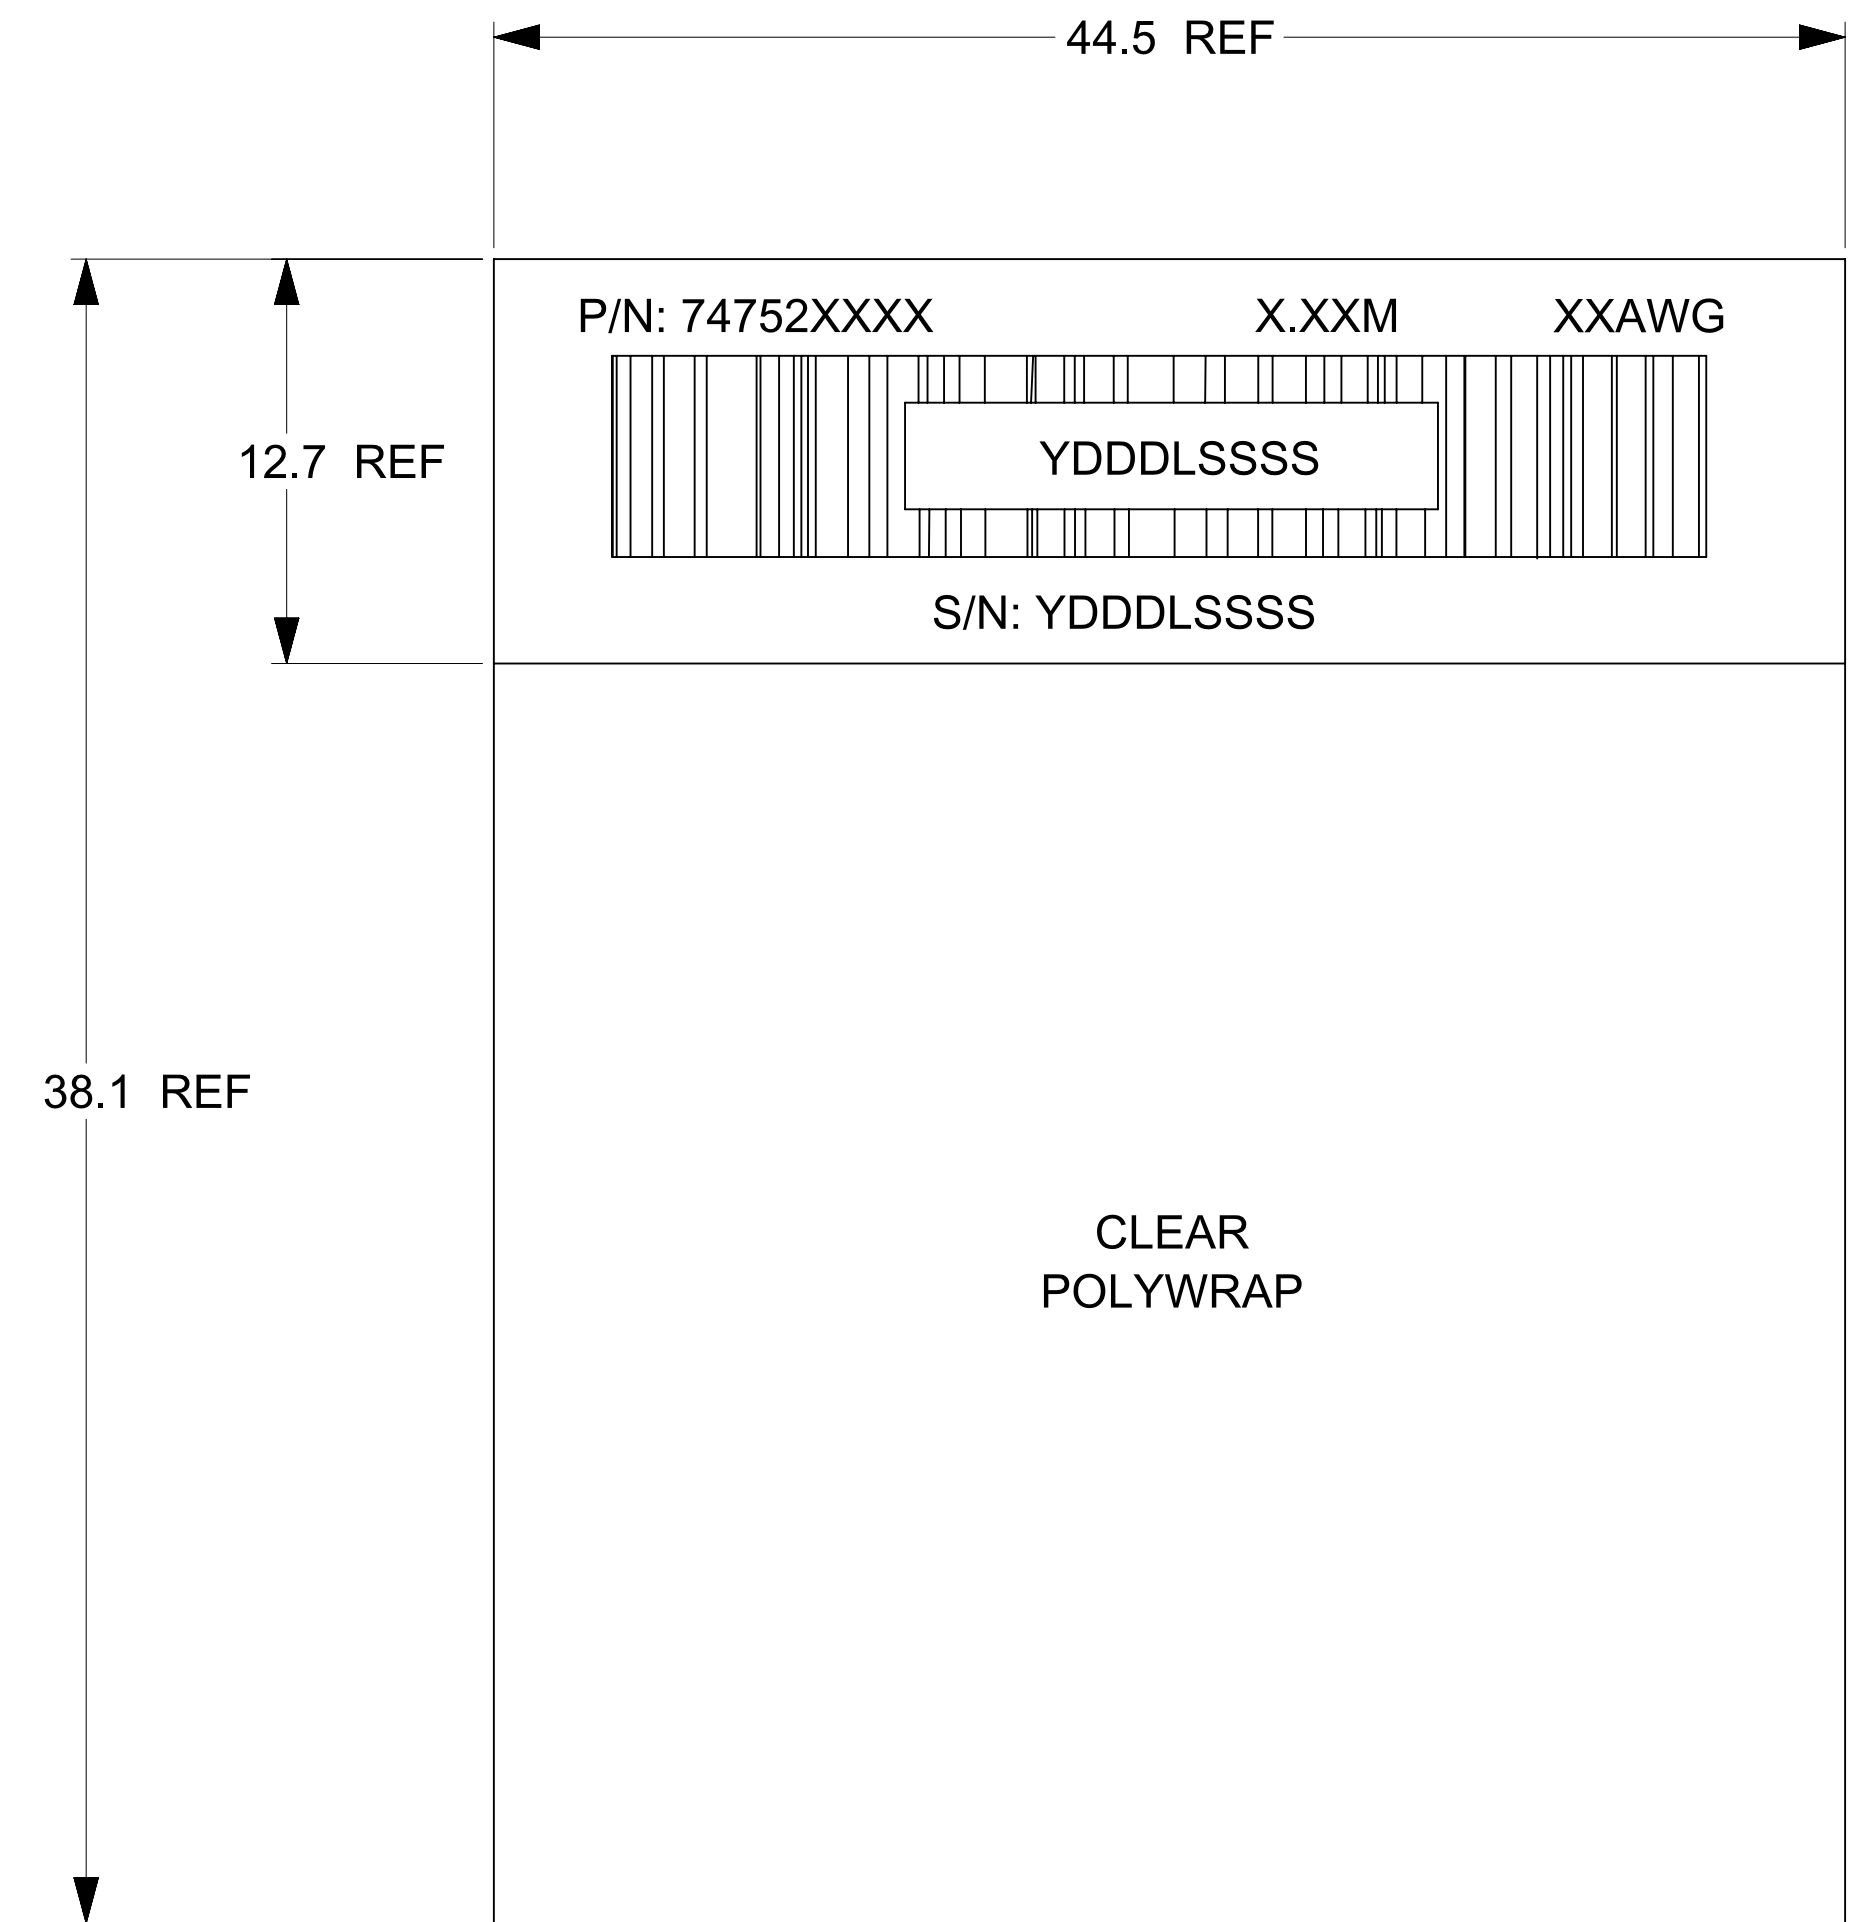

P/N: SEE TABLE
 S/N: Y = YEAR, LAST DIGIT OF YEAR
 DDD = DAY OF THE YEAR
 L = LOCATION - 1 = USA
 2 = MEXICO
 3 = CHINA
 4 = PHILIPPINES
 SSSS = SERIAL NUMBER

X.XXM: CABLE LENGTH, SEE TABLE

XXAWG: WIRE GAGE, SEE TABLE

(DATE CODE ISO-8601 FORMAT)

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_D = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC: RETRACTED AS PER SALESFORCE 572458.						
	DIMENSION UNITS	SCALE				SFP+ TO SFP+ 10G PASSIVE CABLE ASSEMBLY		
	mm	2:1						
	GENERAL TOLERANCES (UNLESS SPECIFIED)							
ANGULAR TOL \pm 2'		PRODUCT SALES DRAWING						
4 PLACES \pm								
3 PLACES \pm								
2 PLACES \pm 0.130								
1 PLACE \pm 0.25		DOCUMENT NUMBER DOC TYPE DOC PART REVISION 747520008 PSD 000 I						
0 PLACES \pm								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					STATUS: Production DRWN: ANIKETHAN SS 2023-07-19 CHK'D: Ganesh Rao B 2023-08-04 APPR: Gurunandan GA 2023-08-04			
THIRD ANGLE PROJECTION								
D-DRAWING		SERIES MATERIAL NUMBER CUSTOMER SHEET NUMBER D-SIZE 74752 SEE TABLE GENERAL MARKET 3 OF 3						