

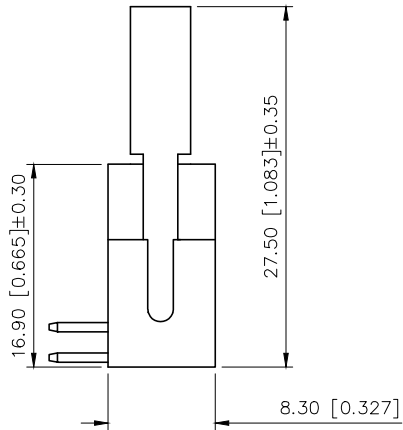
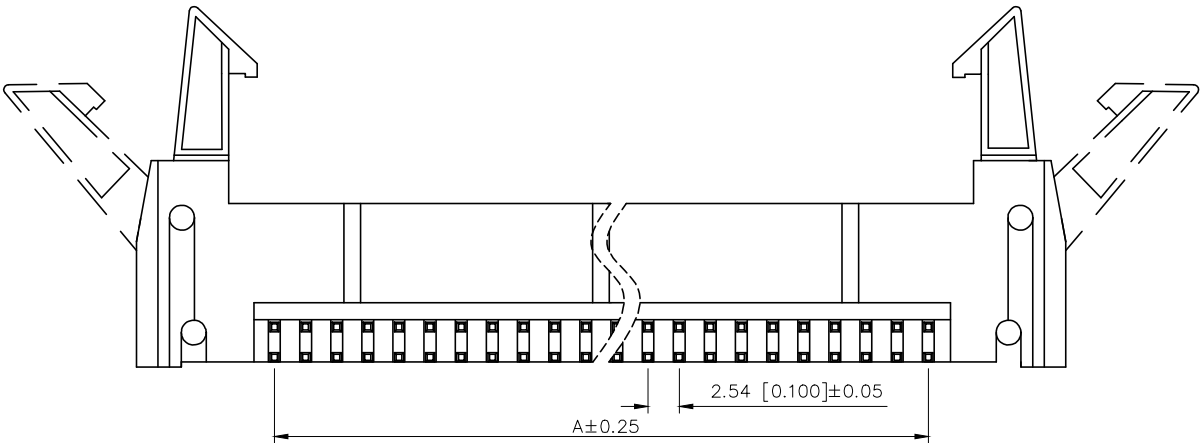


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.17	阿树

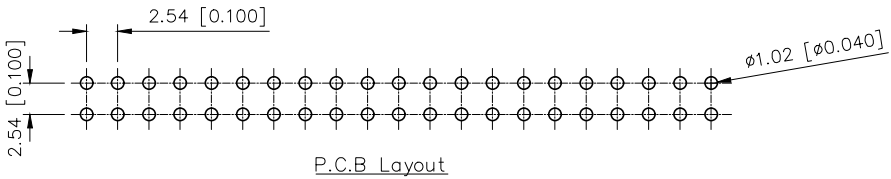

Specifications:
规格:
Voltage rating: 250V AC/DC
额定电压: 250V AC/DC
Current rating: 3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage: 600V AC/minute
耐受电压: 600V AC/分钟
Temperature range: -25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance: ≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤20mΩ
接触电阻: ≤20mΩ
After environmental testing: ≤30mΩ
环境测试后: ≤30兆欧

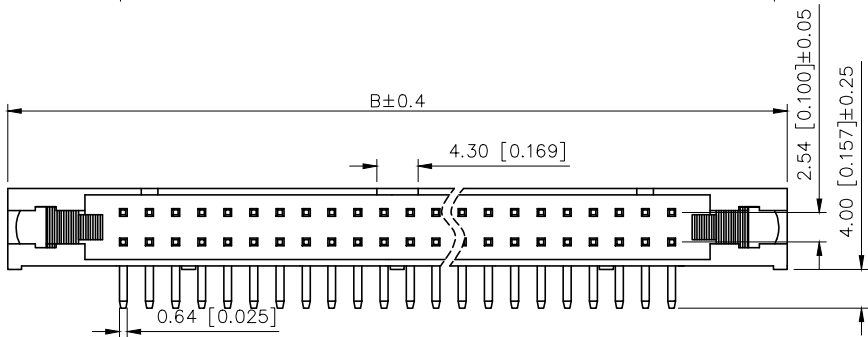

PART NO.:

X9555 W R-2xXX A-PT V01 XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
②Category: W-Wafer
③Welding Board Angle: R-Straight 90°
④Row No.Pin No: 2xXX-2x03~2x32Pin
⑤Plug the Pin&Special NO: A-Ejector Header
⑥Material: PT-PBT UL94V-0
⑦Plating Category: V01-All Gold Flash
⑧Color: Blank-Natural Color

poles	Dimensions(mm)		poles	Dimensions(mm)	
	A	B		A	B
2x03	5.08	26.82	2x13	30.48	52.22
2x04	7.60	29.36	2x15	35.56	57.30
2x05	10.16	31.90	2x17	40.64	62.38
2x07	15.24	36.98	2x20	48.26	70.00
2x08	17.78	39.52	2x25	60.96	82.70
2x10	22.86	44.60	2x30	73.66	95.40
2x12	27.94	49.68	2x32	78.74	100.48

X9555WR-2xXXA-PTV01	PBT UL 94V-0	Brass	Gold-Flash	X9555H
PART NO	Material	Material(pin)	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: Wire to board connector
CHECKED		UNIT: mm/in	PART NO.: X9555WR-2xXXA-PTV01
APPROVED		SIZE: A4	DWG NO.: