

WIRE CONNECTOR CU WITH CONTROL WIRE TAP 4 PCS.
ACCESSORY FOR: 3VA5/6 400/600



Model			
product brand name	SETRON		
product designation	accessories		
Product version	circular conductor terminal		
Accessories	Wire connector		
General technical data			
designaion / of the terminal	TC1.5		
Voltage			
Current			
Mechanical Design			
Connections according IEC			
IEC-marking / of terminals	50-300 mm² CU 400A NNL		
stripped length	28 mm		
Connetctions according UL			
UL-marking / of terminals	TC1.5 CMC 1-600 CU9 UR CSA		
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C		
stripped length	1.1 in		
connectable conductor cross-section - for copper cable / stranded / minimum - for copper cable / stranded / maximum - for copper cable / finely stranded / minimum - for copper cable / finely stranded / maximum	1 AWG 600 kcmil 1 AWG 600 kcmil		
tightening torque / when using copper cables - stranded - finely stranded	1 AWG - 600 kcmil: 500 lb-in 1 AWG - 600 kcmil: 500 lb-in		
Certificates			
General Product Approval	EMC	Declaration of Conformity	Shipping Approval



[Miscellaneous](#)



other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9374-0JK13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3VA9374-0JK13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9374-0JK13

Tender specifications

<http://www.siemens.com/specifications>

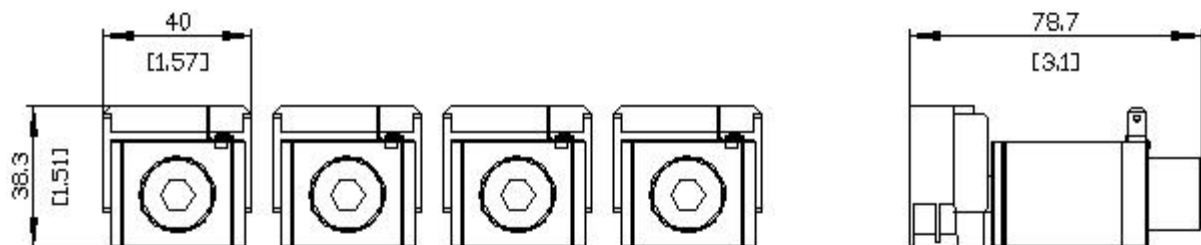

last modified:

12/20/2020