


NOTES:

1. MATERIALS:  
 CONTACT: BRASS  
 ALL OTHER METAL PARTS: STAINLESS STEEL  
 INSULATOR: ULTEM1000
2. FINISH:  
 CONTACT: GOLD  
 ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:  
 DURABILITY: 500 CYCLES
4. ELECTRICAL:  
 IMPEDANCE: 50Ω  
 FREQUENCY RANGE: DC to 50GHz  
 VSWR(dB): 1.2:1 (-20.83dB)

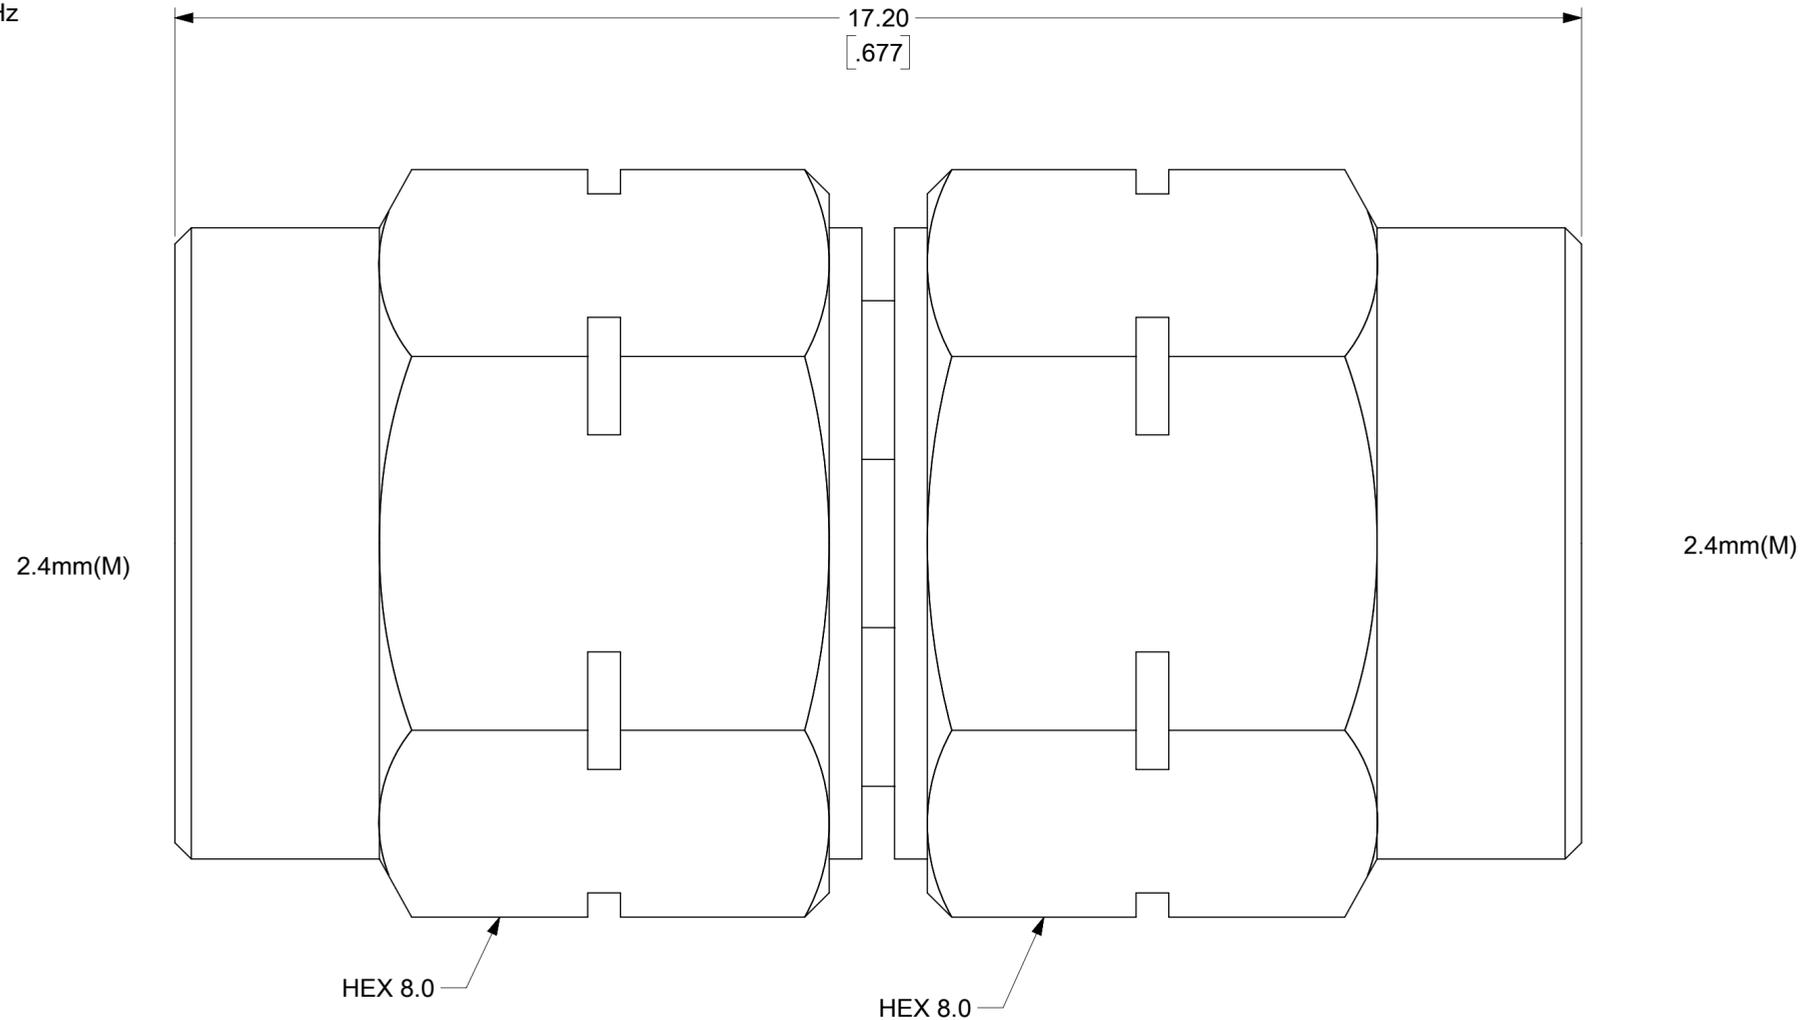

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO GENERAL MARKET				<b>molex</b>	
$\frac{F}{A} = 0$	MM/INCH	NTS		EC NO: 735515 DRWN: KTAGAN 2023/01/18 CHK'D: LMEIER 2023/01/18 APPR: JBORRELLI 2023/01/19				2.4MM PLUG TO 2.4MM PLUG ADAPTER		
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)							INITIAL REVISION: DRWN: VISHNM2 2022/11/24 APPR: LMEIER 2022/12/15		
$\frac{F}{P} = 0$		MM	INCH	DOCUMENT NUMBER						
DIVISIONAL SYMBOLS	4 PLACES	±	±					733870060		
	3 PLACES	±	±	MATERIAL NUMBER						
	2 PLACES	±	±					CUSTOMER		
	1 PLACE	±	±	SHEET NUMBER						
	0 PLACES	±	±					THIRD ANGLE PROJECTION		
	ANGULAR TOL	±	°	DRAWING						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							SERIES		
				C-SIZE						
								73387		
				MATERIAL NUMBER						
								733870060		
				CUSTOMER						
								SHEET NUMBER		
				1 OF 1						