


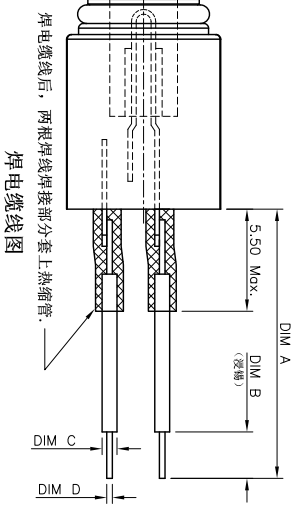

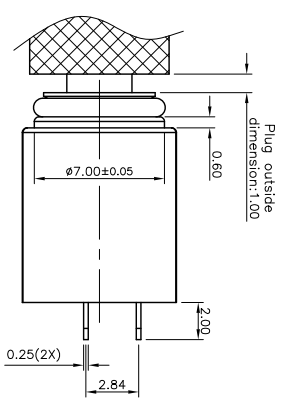


DC-101-DXXX

DC Power jack
G-Switch P/N:
D: needle diameter
D013=1.3mm

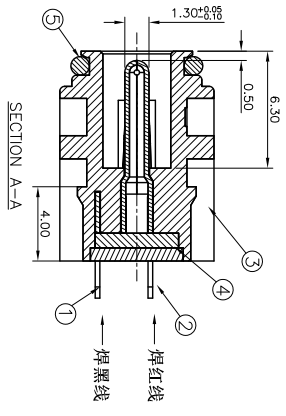


3D VIEW



G-Switch Specification:
Operating temperature range: -30°C to +85°C
Rating: 1.5A, 24V DC
Insulation resistance: 100M Ω min, 100V DC
Dielectric strength: 500V AC for 1 min
Contact resistance: 30m Ω max.
Life: 5, 000 Cycles
IPXX: IP67

ITEM	PART NUMBER	DIM A	DIM B	DIM C	DIM D
01	DC-101-DXXX	14.50±1.50	2.50 ^{+0.80} _{-0.00}	40.80	40.30
02	DC-101-DXXX	43.00±1.50	1.00±0.50	41.00	40.48
01	CONTACT A	1 PCS	STAINLESS STEEL T=0.25		Au Plated
02	PIN	1 PCS	BRASS T=0.25		Au Plated
03	HOUSING	1 PCS	PA66+30%GF		BLACK UL 94V-0
04	COVER	1 PCS	PA66+30%GF		BLACK UL 94V-0
05	0件数	1 PCS	热缩		RED UL 94V-0
ITEM	PART NAME	QTY	MATERIAL	DESCRIPTION	



品源科技
Switch

Unless otherwise specified, Tolerance:
 ±0.30
 X: ±0.20
 X.X: ±0.15
 X.XX: ±0.10
 X.XXX: ±5

G-Switch Electronic (HongKong) CO., Ltd.

DESIGN	陈维祺	DATE	2016.05.29	TITLE:	DC-101-DXXX
CHECKED		DATE		REV: X1	SCALE: 4:1
APPROVED		DATE		SIZE: A4	SHEET: 1/1

http://www.dg-switch.com
TEL: 0769-82388879

A

B

C

D

E

5