
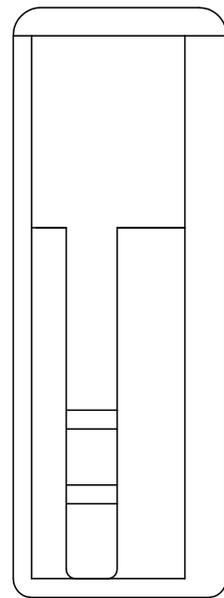


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.19	阿树

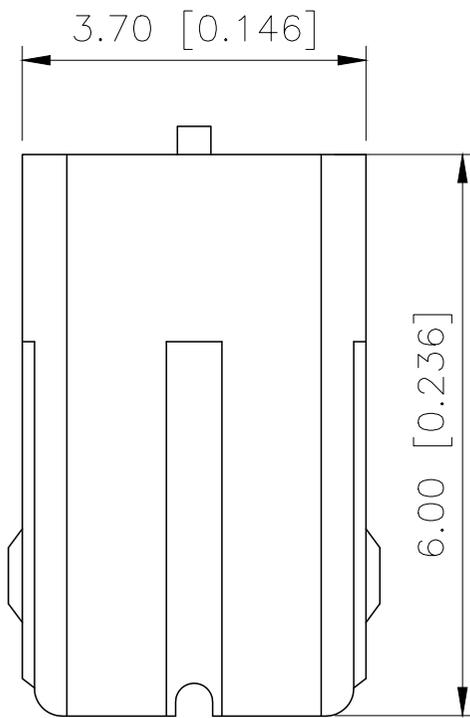


■ SPECIFICATIONS

- Voltage rating: 350V AC/DC
- Current rating: 4A AC/DC
- Withstanding Voltage: 1700V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance:  $\geq 1000M\Omega$
- Contact resistance:  $\leq 30m\Omega$
- After environmental testing:  $\leq 20m\Omega$

PART NO.:

X1800 H-02 A-N0  
 ① ② ③ ④ ⑤

- ① Series No
- ② Category: H-HSG
- ③ Row No. Pin No: XX-02Pin
- ④ Plug the Pin & Special No.: A-No Lock
- ⑤ Material: N0-PA66 UL94V-0

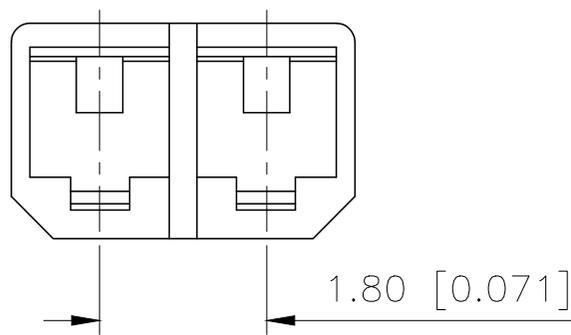

X1800H-02A-N0	Nylon 66 UL 94V-0	X1800T	X1800W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	$\pm 5^\circ$
X.	$\pm 0.40$
X.x	$\pm 0.30$
X.xx	$\pm 0.20$
X.xxx	$\pm 0.15$
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	2.54mm Crimp Style Connector
PART NO.:	X1800H-02A-N0
DWG NO.:	

XKB INDUSTRIAL PRECISION CO., LIMITED