


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

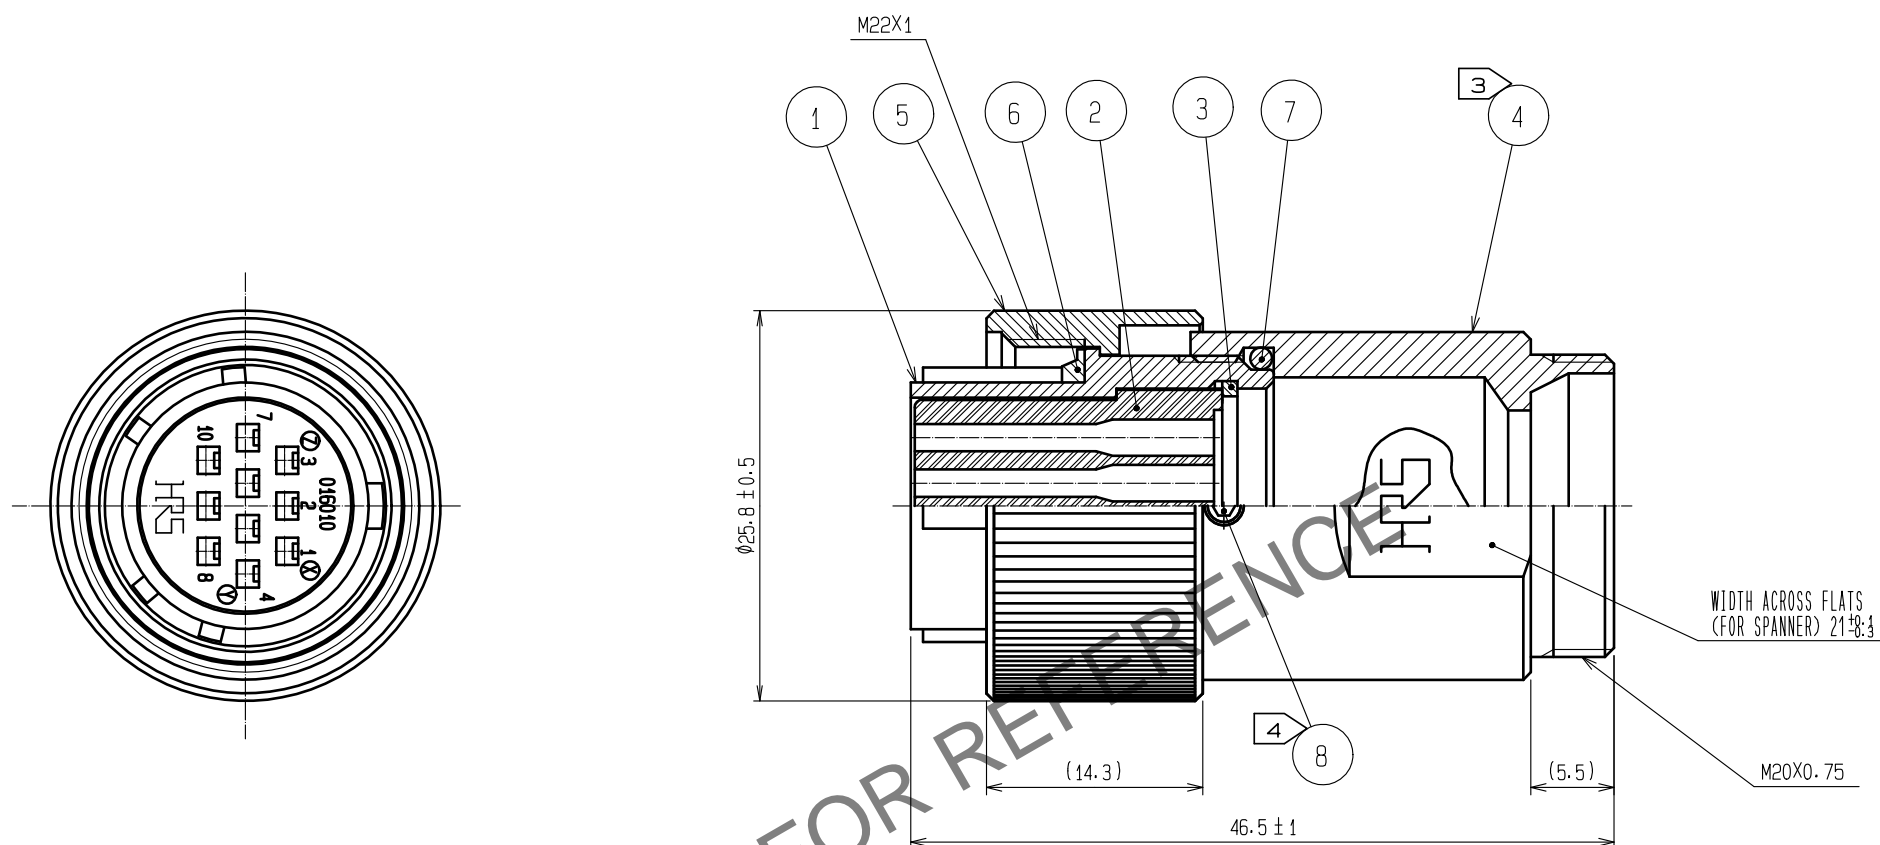

- NOTES
- 1 APPLICABLE CRIMP CONTACT: JRC-SC2-212(AWG#20 TO 24)  
JRC-SC2-222(AWG#24 TO 28)
  - 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL): RM-TP
  - 3 THE RECOMMENDED CLAMP TORQUE, REF. NO. ④: 3 TO 3.5N · m.
  - 4 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧: 0.2 TO 0.25N · m.  
AND LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT FROM LOOSENING.
  - 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ④ TO REF. NO. ① IS SHOWN.
  - 6 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR16WCC-※.  
※ DESIGNATE DIAMETER OF APPLICABLE CABLE.
  - 7 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

4	BRASS	BLACK CHROME PLATING	8	STAINLESS STEEL			
3	PHOSPHOR BRONZE	NICKEL PLATING	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)		
2	POLYCARBONATE	(BLACK) UL94V-0	6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)		
1	ALUMINUM ALLOY	BLACK CHROME PLATING	5	BRASS	BLACK CHROME PLATING		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.	APPROVED	· HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-110655-31-00		
	CHECKED	· HY. KOBAYASHI	18.02.26	PART NO.	JR16WP-10SC(31)		
	DESIGNED	· TH. KAMEYA	18.02.24	CODE NO.	CL114-2122-0-31		
	DRAWN	· MK. INOUE	18.02.14				