

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, Direct connection, product family: IPD, connection method: Single wires/ Push-in connection, number of positions: 2+PE, M20, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, 450 V, 16 A, PA, light gray, external cable diameter: 6 mm ... 9 mm and 8 mm ... 13 mm, cable length: 1 m

## Your advantages

- Convenient: quick and easy assembly without special tools
- Fast and easy startup, thanks to tool-free Push-in connection technology
- Reliable installation in harsh environments with IP66, IP68, and IP69K throughout the entire system

## Commercial data

Item number	1047350
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF51
Product key	BF6IAB
Catalog page	Page 469 (C-2-2019)
GTIN	4055626648316
Weight per piece (including packing)	146.6 g
Weight per piece (excluding packing)	146.6 g
Customs tariff number	85366990
Country of origin	CN

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

## Technical data

### Product properties

Product type	Panel feed-through
Product family	IPD
Number of positions	3
Connection profile	2+PE
Position marking	L, N, PE
Type	Direct connection

### Data management status

Article revision	06
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

## Connection data


### Connection technology

Connection method On the device side	Single wires
Connection method On the field side	Push-in connection
Frequency of connections between conductors of the same cross section	max. 10

### Conductor connection

Conductor cross section flexibel	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section with ferrule	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Connection cross section AWG	20 ... 14

## Dimensions

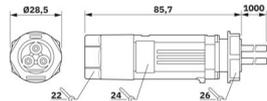Dimensional drawing	
Width	28.6 mm
Length	85.7 mm

## Electrical properties

Rated surge voltage (III/3)	6 kV
Rated current	16 A
Rated voltage (III/3)	450 V
Nominal voltage U <sub>N</sub>	450 V AC 450 V DC

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

Nominal current $I_N$	16 A (observe derating)
-----------------------	-------------------------

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	10
-----------------------------	----

## Material specifications

Color (Housing)	light gray (RAL 7035)
Material Housing	PA
Material Seal	NBR (Field)
	EPDM (Device)
Contact material	Cu
Contact surface material	Ni/Sn

## Cable/line

Cable length	1 m
External cable diameter	6 mm ... 9 mm
	8 mm ... 13 mm
Stripping length of the individual wire	10 mm
Position marking	L, N, PE
Single wire, color	brown, blue, green/yellow
Halogen-free	no

## Mounting


Mounting type	Front mounting M20
---------------	--------------------

## Environmental and real-life conditions


### Ambient conditions

Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K
Impact strength	IK07
Ambient temperature (operation)	-40 °C ... 90 °C (T = 45 °C)
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 90 °C
Resistance to UV radiation	yes

Drawings

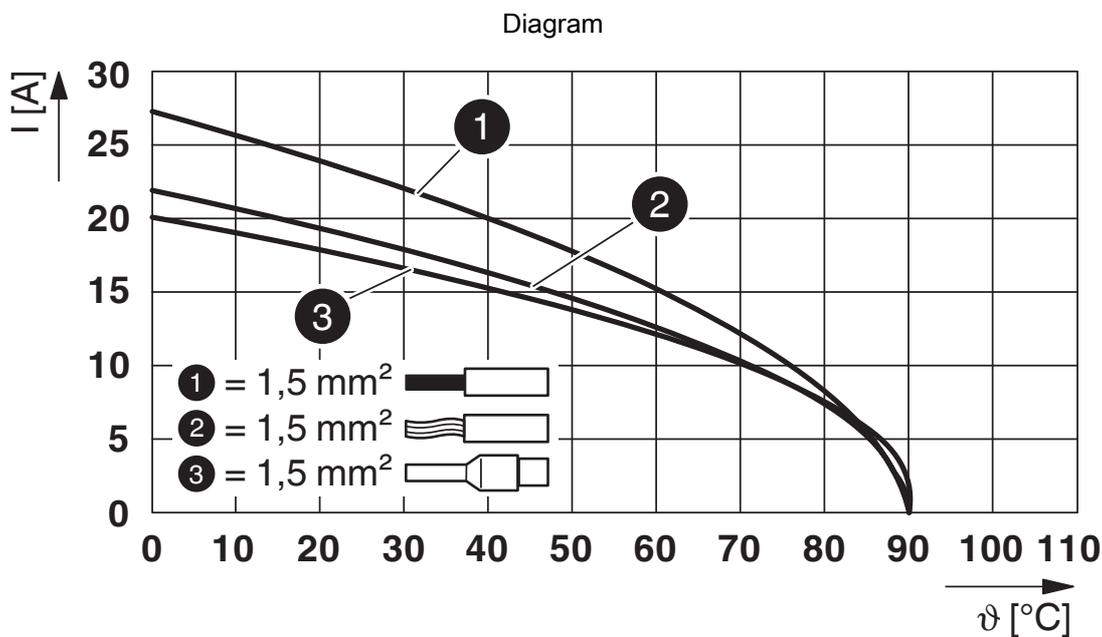

Derating diagram for 1.5 mm<sup>2</sup>

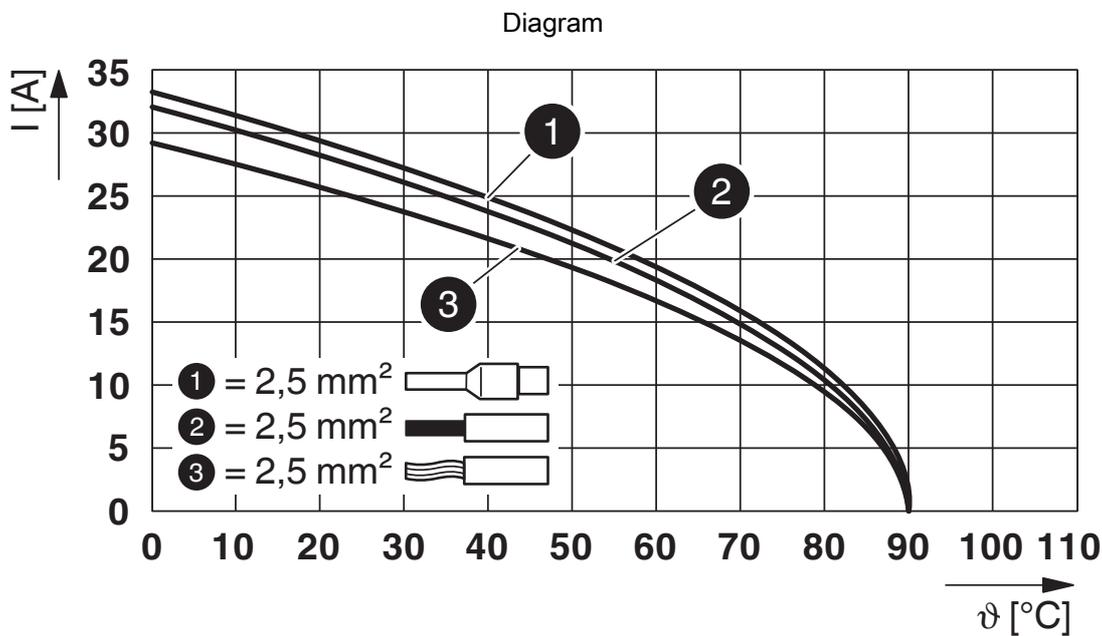

Derating diagram for 2.5 mm<sup>2</sup>


# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350


<https://www.phoenixcontact.com/us/products/1047350>

Diagram

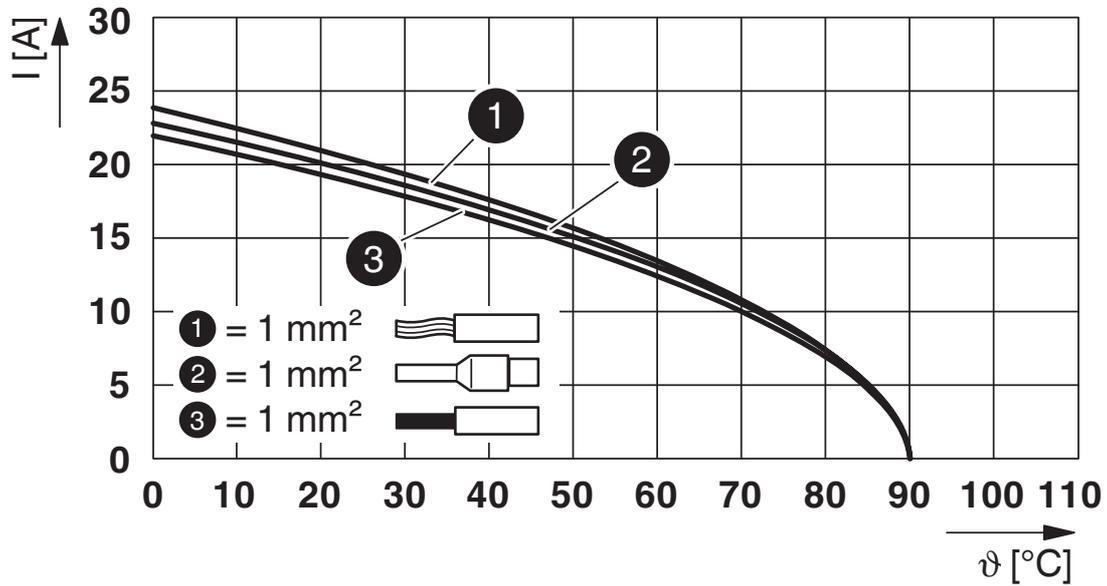

Derating diagram for 1.0 mm<sup>2</sup>

Dimensional drawing

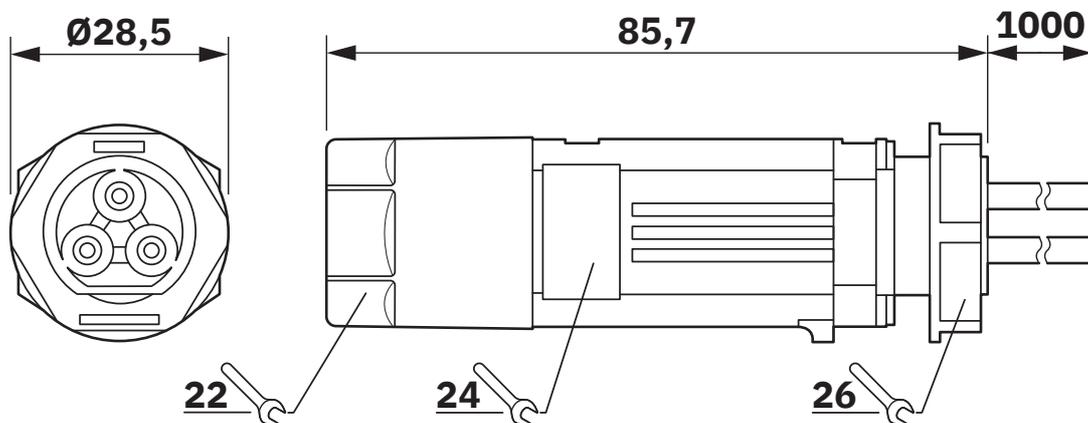

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1047350>

 <b>VDE Zeichengenehmigung</b> Approval ID: 40049992				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	450 V	20 A	-	0.5 - 2.5

 <b>UL Listed</b> Approval ID: E468743				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Only rigid conductors	600 V	15 A	-	- 14
multi-stranded with ferrule	600 V	15 A	-	- 14

 <b>cUL Listed</b> Approval ID: E468743				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	20 A	- 14	-

<b>DNV</b> Approval ID: TAE00004G2				
---------------------------------------	--	--	--	--

<b>cULus Listed</b>				
---------------------	--	--	--	--

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

## Classifications

### ECLASS

ECLASS-11.0	27440602
ECLASS-12.0	27440602
ECLASS-13.0	27440602

### ETIM

ETIM 9.0	EC002566
----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# IPD WD 3P2,5 1,0 M20 GY - Panel feed-through



1047350

<https://www.phoenixcontact.com/us/products/1047350>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)