

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 12A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 28~14AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	500V	320V	320V
Rate current(A)		17.5A	

2. Wire range : 0.2~1.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.00mm, Poles : N=02~24P
3. Stripping length : 8~9mm
4. Operating temperature: -40°C~+130°C
5. Undimensioned tolerances:





Pitch range in mm	Nominal dimension range in mm			-	D
	Over	TO	Over		
6 TO 10	6	10	30	0.1/10	≤
10 TO 24	24	30	60		
			100		
			150		
			±0.15	±0.30	±0.50
			±0.30	±0.50	±0.70
			±1.00	±1.30	±2.0

6. RoHS Compliance

Ordering Information

JL212V-500 XX B 0 1

Pitch 500=5.0PH
No. of pins 2P~24P
Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
Packing 0=Pe bag T=Tube A=Tray

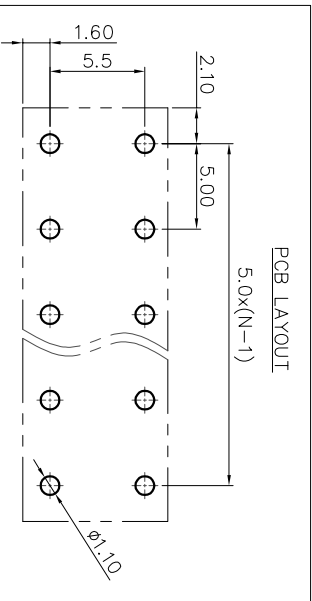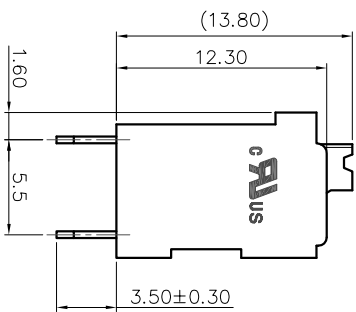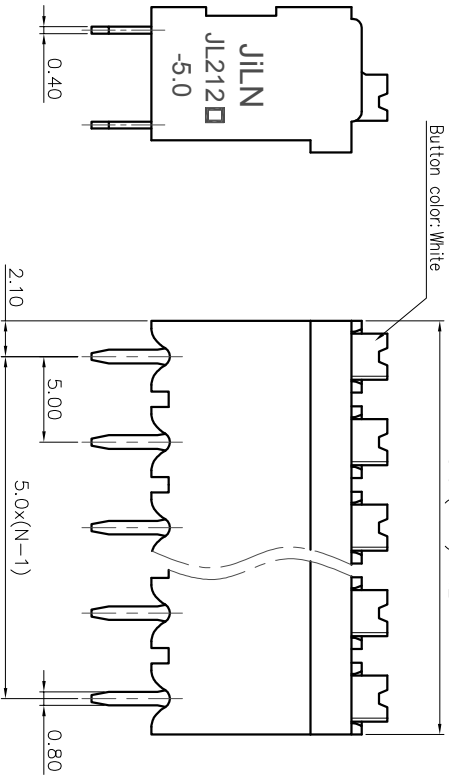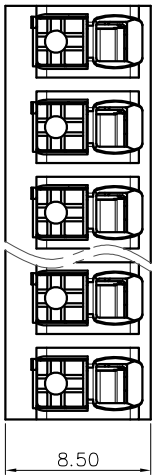

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.10.14

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JLN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PROJ				JL212V-THR-5.0-XXP 弹簧式/直脚/双排/黑色