

## Pushbutton Ø 22 mm silver contact

82-6561.1000



<https://eao.com/p/82-6561.1000>

Your product:

---



82-6561.1000

Pushbutton Ø 22 mm silver contact

#### FRONT

Front form:	round
Front bezel material:	Aluminium
Front dimension:	Ø 25 mm
Front bezel shape:	flush

#### MOUNTING

Mounting type:	Panel mounting
Mounting cut-out:	Ø 22 mm

#### OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens optics:	opaque
Lens material:	Aluminium
Lens colour:	Nature
Lens shape:	flush

#### ELECTRICAL CHARACTERISTICS

Rated insulation voltage $U_i$ :	250 V
Thermal current $I_{th}$ :	5 A
Pollution degree:	2, according to EN IEC 60947-1
Switching voltage and switching current:	

according to IEC 60947-5-1 (Silver contacts)	
Service categorie AC-15	
Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)	
cosφ 0,75 ... 0,8	
Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

<b>Electrical lifetime:</b>	50 000 cycles of operation
<b>Contacts:</b>	1 C
<b>Rated Operational Voltage Ue:</b>	250 VAC
<b>Electric strength:</b>	1500 VAC, 50 Hz 1 minute between life terminals and ground

## MECHANICAL CHARACTERISTIC

<b>Mechanical lifetime:</b>	1 Mio. cycles of operation
<b>Operating force:</b>	4 N ... 7 N
<b>Switching system:</b>	Snap-action switching element
<b>Terminal:</b>	Soldering terminal, 2.8 x 0.5 mm
<b>Contact material:</b>	Silver
<b>Tightening torque:</b>	0.5 ... 0.6 Nm
<b>Switching action:</b>	Momentary
<b>Operating Travel:</b>	ca. 3 mm
<b>Weight:</b>	0.02 kg

## AMBIENT CONDITION

<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>IP front protection:</b>	IP65, IP67
<b>Vibration resistance:</b>	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
<b>Operating temperature:</b>	– 30 °C ... + 70 °C
<b>Shock resistance:</b>	

Max. 500 m / s<sup>2</sup> as per IEC 60068-2-27

**Climate resistance:**

Damp heat, 21 days according to IEC 60512-11

**CERTIFICATE**

**Conformities:**

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

**Approbations:**


CB, CCC, C UL, UL

**OTHER**


**Short Description:**

Pushbutton Ø 22 mm silver contact, Momentary, 1 C, Soldering terminal, 2.8 x 0.5 mm, round, Aluminium, Nature


**Mounting cut-outs:**

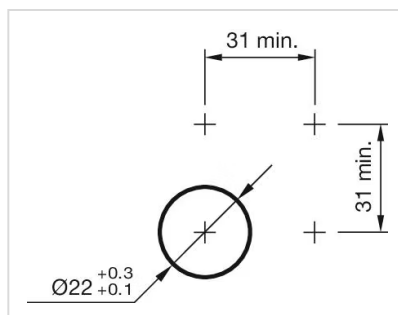


**Component layouts:**

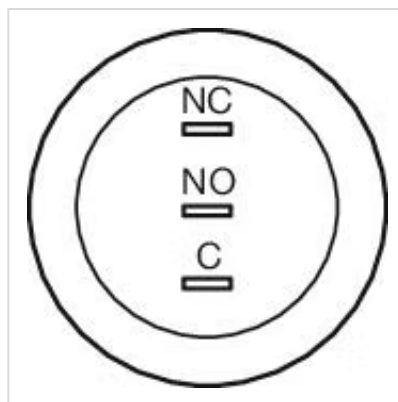

**Wiring diagrams:**

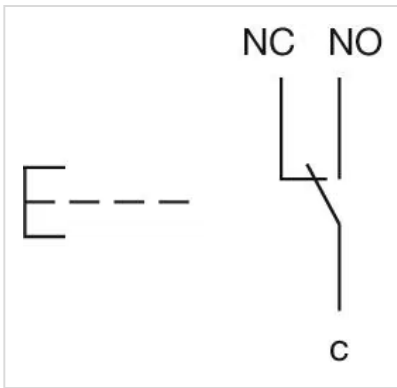

**Dimension drawings:**

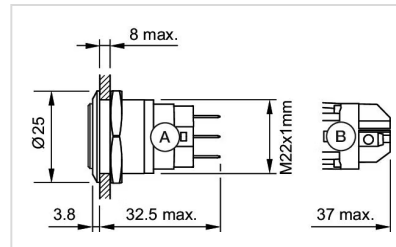

A = Solder terminal  
B = Screw terminal