

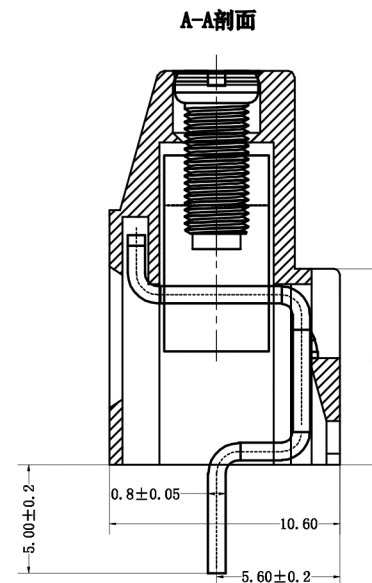
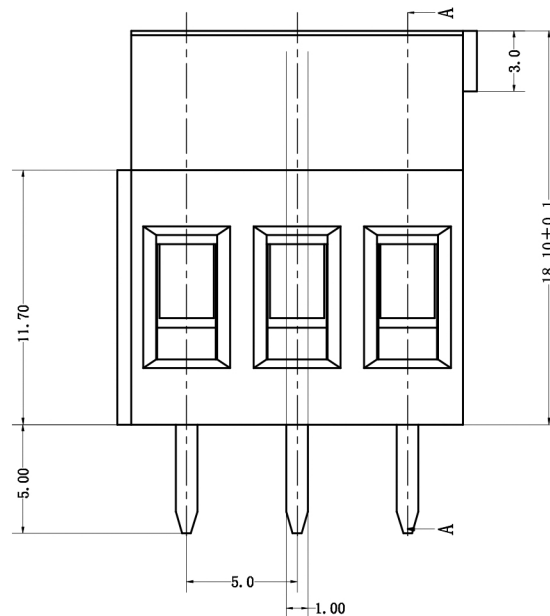


5		6		7		8	
编号	修改原因	制图	审核	核准			

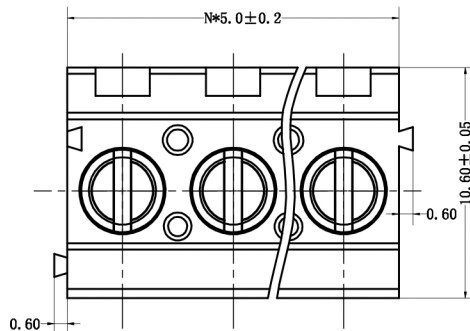

- 材质&电镀
- 螺丝: M3.0, 钢, 镀锌
- 方块: 黄铜, 镀镍
- 焊脚: 黄铜, 镀锡
- 塑件: PA66, UL94V-0
- 电气性能
- 参考标准 UL IEC
- 额定电压: 300V 250V
- 额定电流: 20A 20A
- 使用线径: 26-12AWG 2.5mm²
- 接触电阻: 20MΩ
- 绝缘电阻: 500MΩ/DC500V
- 耐电压: AC2000V/1min
- 机械性能
- 温度范围: -40°C~+105°C
- 瞬时温度: +250°C for 5 Sec
- 扭矩: 5.10kgf-cm/0.5Nm/4.43Lbin
- 剥线长度: 6-7mm

编码原则:

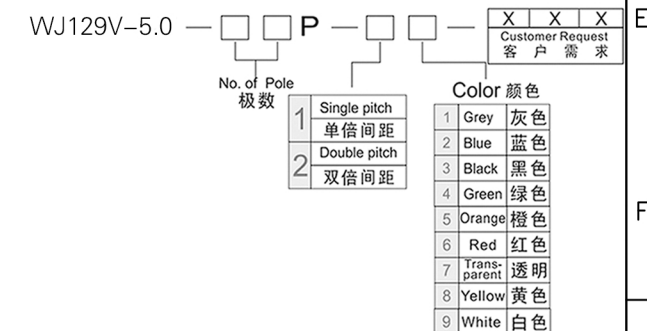

尺寸公差: .X ±0.20 .XX ±0.15 .XXX ±0.10		角度公差: .X ±2° .X ±1.5° .XX ±1°		投影法				品名		欧式接线端子				
				单位		mm				间距5.00MM				
				纸张尺寸		A4		产品系列		WJ129V系列				
图纸类型		客户图纸			 		宁波康奈克斯电气有限公司 NINGBO KANGNEX ELECTRIC.,LTD.							
比例		1:1		图页								1\1		
图纸编号														