

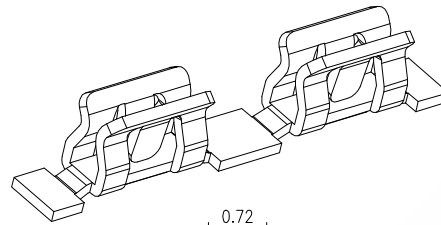


SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12


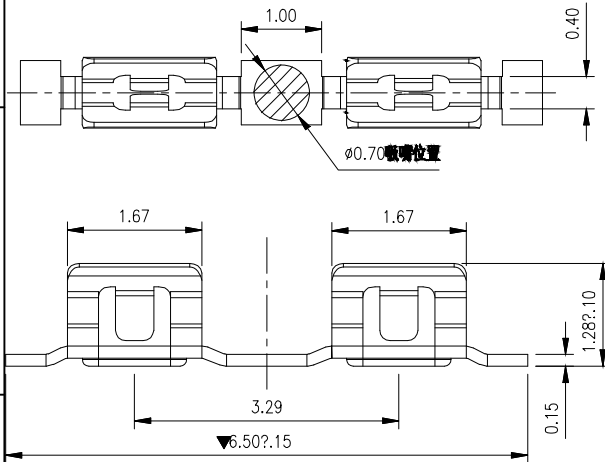


Technical Requirements:

1. Material: Stainless steel SUS301, T = 0.15 ± 0.005;
2. Burrs are not allowed on the soldering surface and contact surface of the terminal tin feet, and the maximum burr on other parts is 0.03mm;
3. Twist: 45°/1000mm, arch 5mm/1000mm;
4. The dimensions marked with "▼" symbol are key control and inspection dimensions;
5. Unmarked R MAX R0.13;
6. The electroplating must pass the 24-hour salt spray test;
7. The life test is > 20,000 times, and the product elasticity is required to be between 60gf - 80gf
8. The nickel base is 50 - 80u" min, and the product surface is tin-plated 80 - 100u" min
9. The product needs to comply with the ROHS regulations, and the applicable thickness of the shielding cover material is 0.15/0.2/0.3/0.40T

SC 65 08 128 - XX T C

- Coating: Tin Plating
- Material: SUS301-T015
- Clip Distance: XX=0.1/0.15/0.25/0.35mm
- Height: H 1.28mm
- Width: C 0.8mm
- Length: L 6.5mm
- Series: 65 Shielding Clips

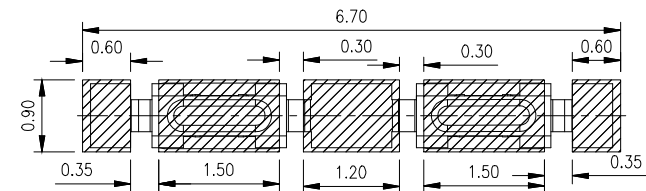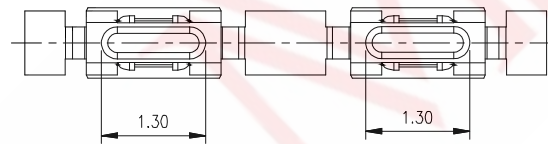

焊盘尺寸  
尺寸公差 ±0.05

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	FIRST VIEW				TITLE: 65型 屏蔽夹(0.1-0.35夹距)		
A	本体	SUS301-T0.15mm	1	镀锡					DWG NO: SC6508-P001		
					GENERAL TOLERANCE				PART NO: SC6508231101		
					≥0~2<	±0.15	SCALE	1:1	UNIT	mm	MODEL NO: SC6508128-XXTC
					DESIGN	WANGGUIFA	2018.06.12	<p><b>SAMZO COMPONENTS</b> Electronic switch and connector manufacturer</p>			NAME: SHIELD CLIP
					CHECKED	ZHENGUILAN	2018.06.12				
					APPROVED	LILIANJIANG	2018.06.14				
					≥2~5<	±0.25					
					≥0~2<	±0.15					
					≥5	±0.35					

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

**SAMZO COMPONENTS**  
Electronic switch and connector manufacturer