



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	①X9	因模具调整作尺寸变更，图面升级整理图面	2025.03.05	阿树

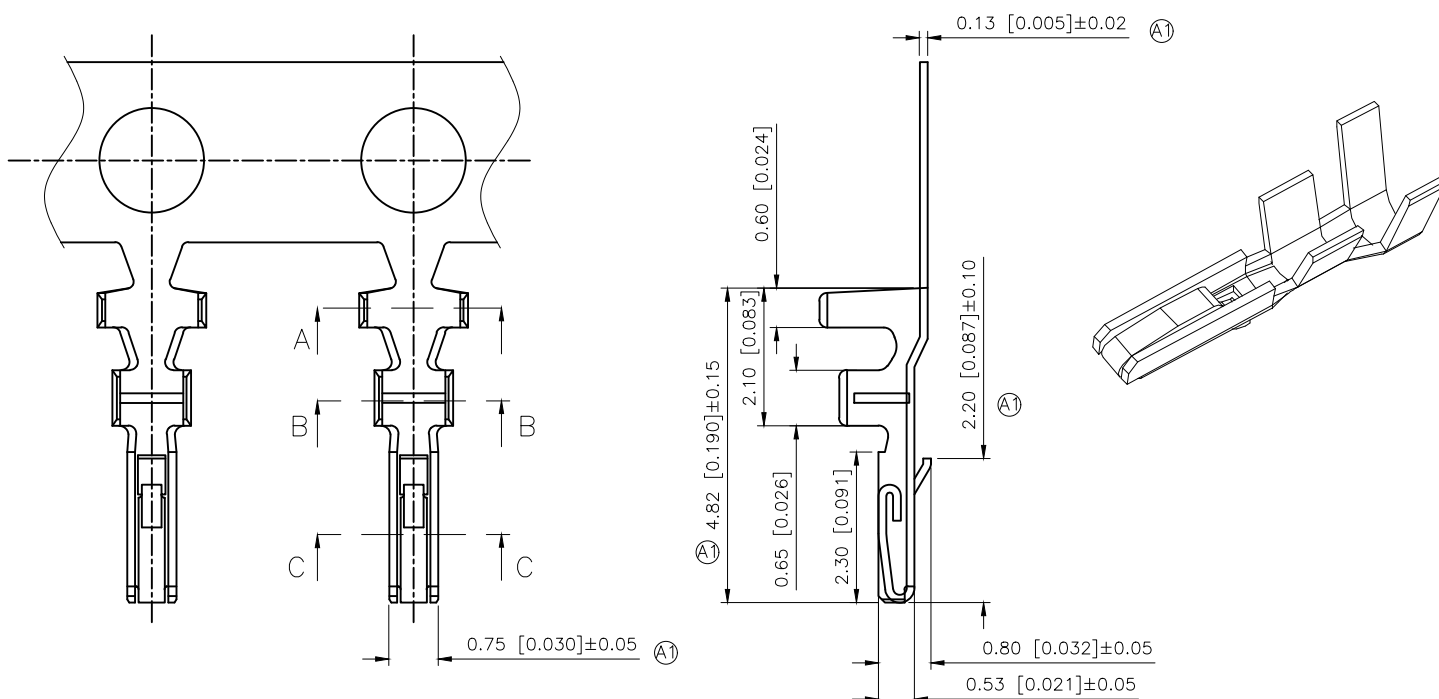

- SPECIFICATIONS
- Voltage rating:50V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤30mΩ
 - After environmental testing:≤50mΩ

PART NO.:
X1251 I-P SN
① ② ③ ④

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating style:V01-Gold Flash;
SN-Bright tin plating

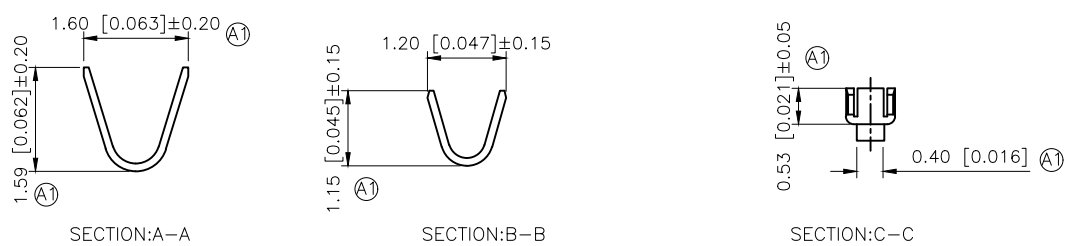

X1251T-PV01	Phosphor Bronze	AWG#26-30	1.00mm(Max)	Stamping Before Pating:30u" Ni MIN; Whole Gold:Gold Flash	X1251H
X1251T-PSN	Phosphor Bronze	AWG#26-30	1.00mm(Max)	Stamping Before Pating:30u" Ni MIN;70u"Sn MIN	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°		DESIGN	阿树	VIEW: 	MODEL TYPE: 2.25mm Crimp Style Connectors		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X1251T-PSN		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES						SCALE		
www.xk-dg.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED				PAGE		
						REVISION		
						N/A		
						1/1		
						A1		