



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	28APR2022	AD	CW
	B	ECR-24-201436	25MAR2024	AD	GY

NOTES:


I. TECHNICAL CHARACTERISTICS:
RATED VOLTAGE: 1500V
RATED CURRENT: 200A (50mm²/AWG1/0)
INSULATION RESISTANCE: >=5000MΩ
RATED WITHSATAND VOLTAGE: 6.8KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: <0.5mΩ
PROTECTION CLASS: IP67 (MATED)
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: -40°C~+125°C
COLOR: ORANGE / BLACK
CONTACT TYPE: CRIMPING

注释:


I. 技术参数:
额定电压: 1500V
额定电流: 200A (50mm²/AWG1/0)
绝缘电阻: >=5000MΩ
额定耐电压: 6.8KV
污染等级: 3
接触电阻: <0.5mΩ
防护等级: IP67(配合)
插拔次数: 500次
工作温度: -40°C~+125°C
颜色: 橙色 / 黑色
端子类型: 压接式

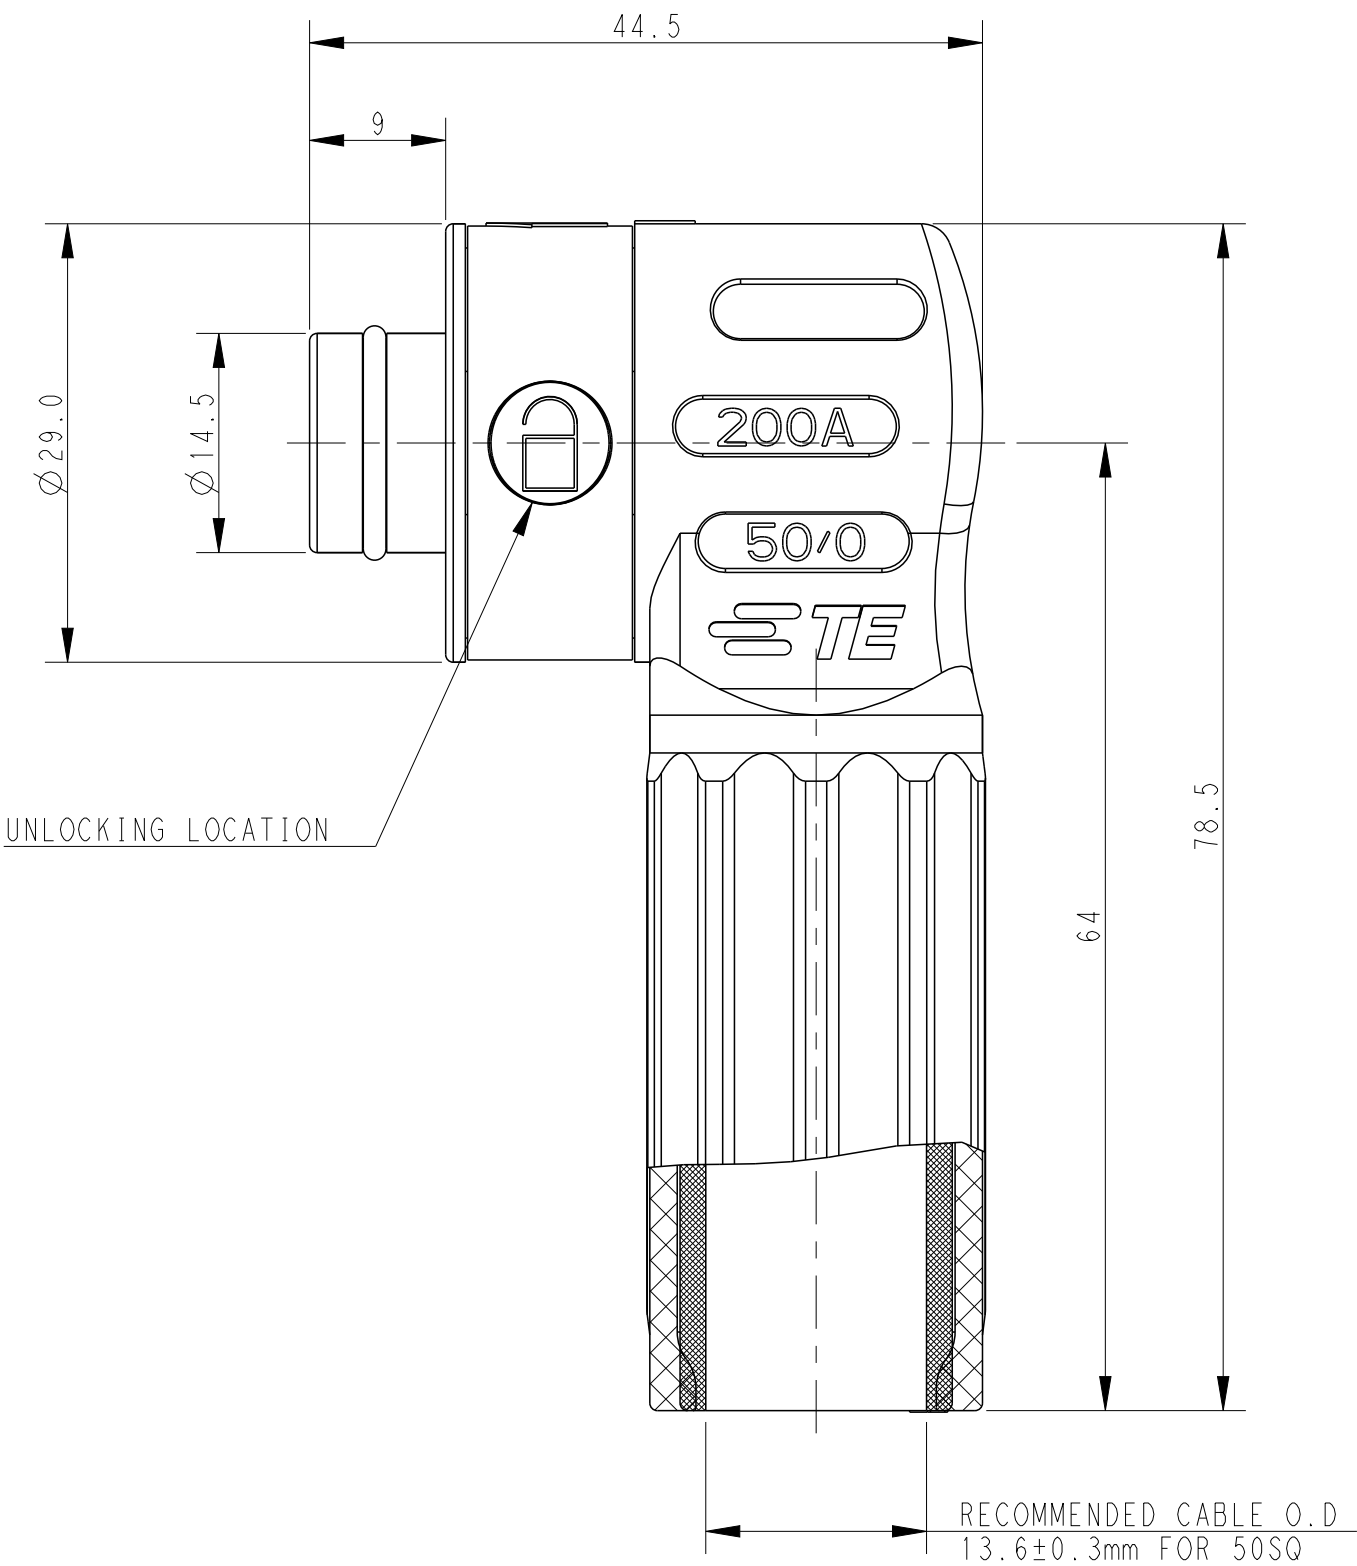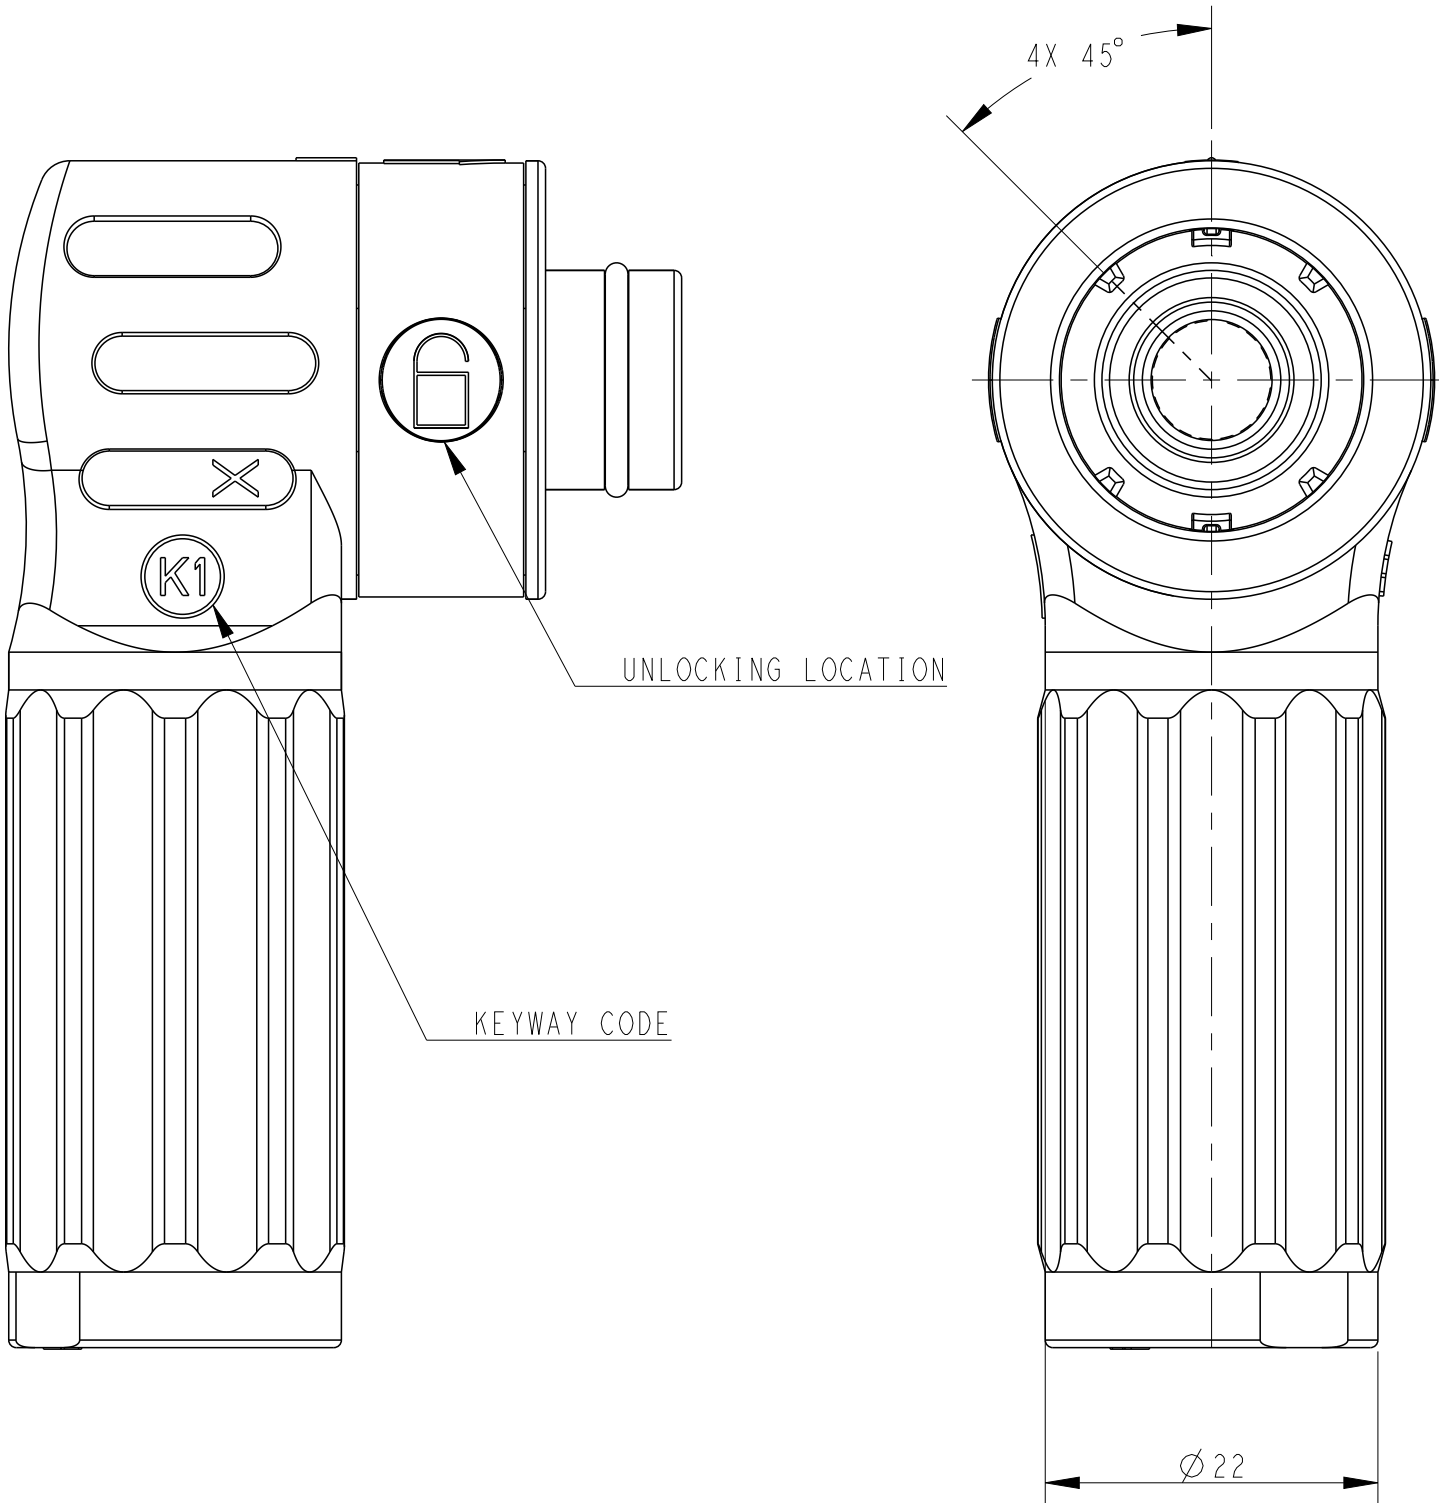

SECTION A-A

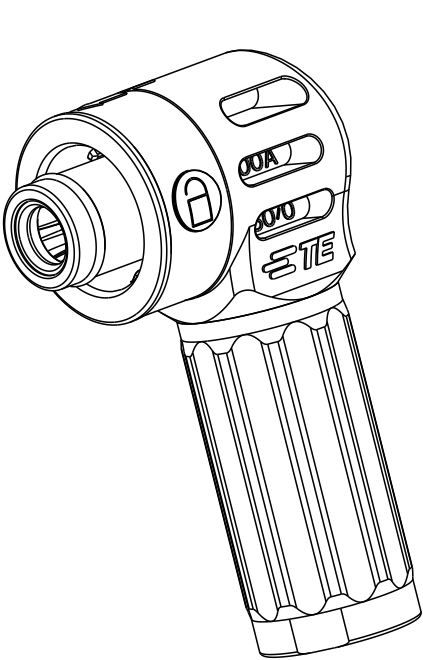

SCALE 1:1

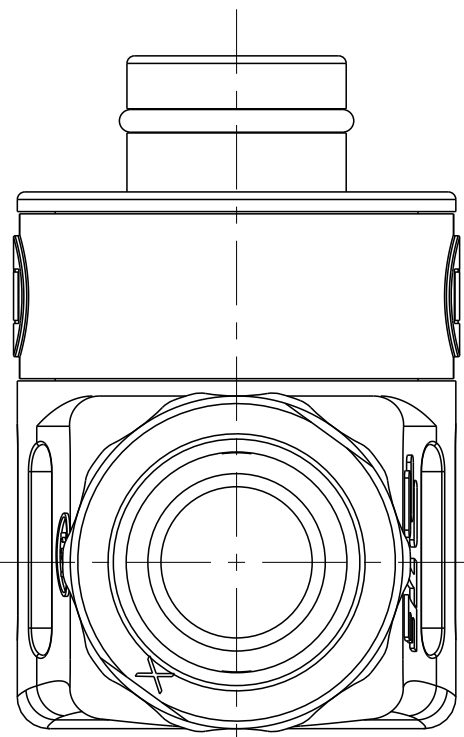

H1111000301-000	HPC-200-050-F-P-OR-01	HPC,200A,50SQMM,FEMALE PLUG,ORANGE,SINGLE CONNECTOR HPC,200A,50平方母端插头橙色单芯连接器			
H1111001301-000	HPC-200-050-F-P-BK-01	HPC,200A,50SQMM,FEMALE PLUG,BLACK,SINGLE CONNECTOR HPC,200A,50平方母端插头黑色单芯连接器			
PART NUMBER 料号		DESCRIPTION 描述			
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24MAR2022 Alan Dong	TE Connectivity		
		CHK 24MAR2022 Gino Yao			
		APVD 24MAR2022 Chris Wang			
		PRODUCT SPEC 108-137616			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HPC-200-050-F-P-XX-01		
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH			
MATERIAL -		-	SIZE A2	CAGE CODE 00779	DRAWING NO C-H111100X301000
		-	WEIGHT -	RESTRICTED TO -	REV B
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 1