
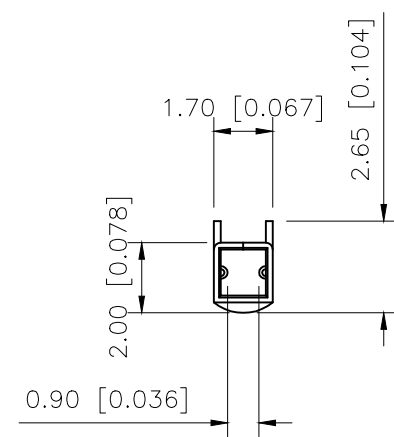





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.07.31	阿 树

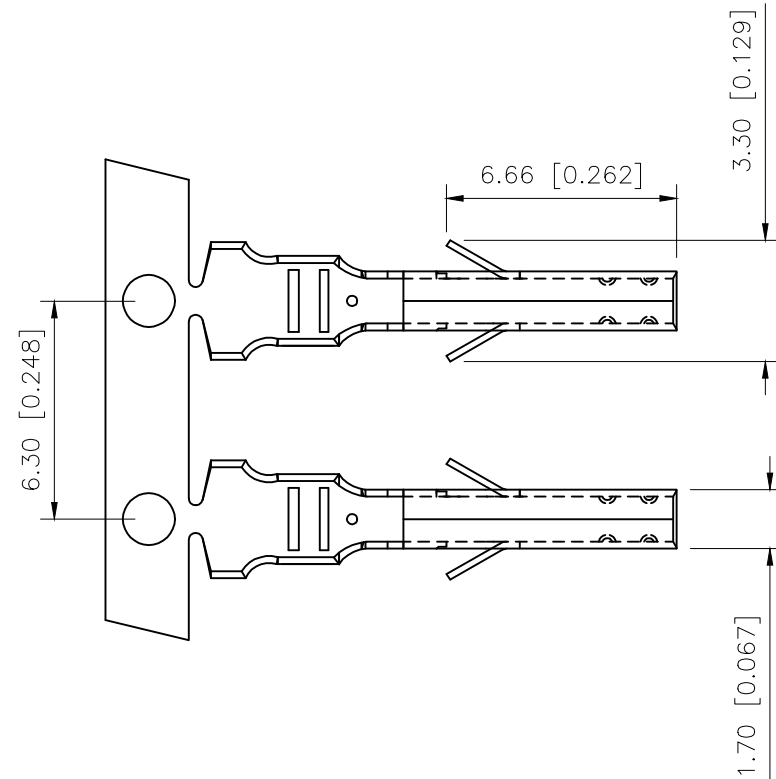

- Specifications
- Voltage rating: 600V AC/DC
 - Current rating: 9A AC/DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -45° to +125°
 - Insulation resistance: $\geq 1000\text{M}\Omega$ Min
 - Contact resistance: $\leq 10\text{m}\Omega$ Max


PART NO.:
X9357 T F-B SN-M
① ② ③ ④ ⑤ ⑥

- ① Series No
② Category: T-terminal
③ Shape: F-Female
④ Material: B-Brass
⑤ Plating style: SN-Tin Plated
⑥ Special No: M-Lower the foot

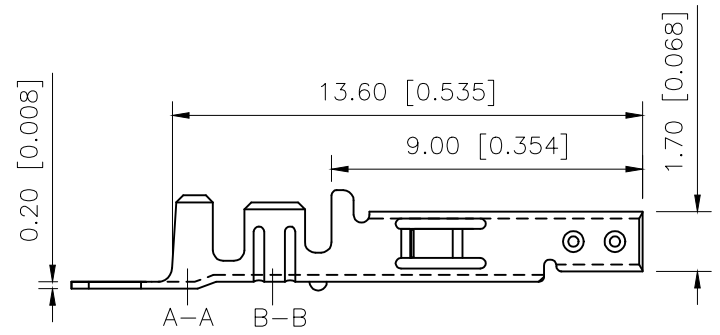

X9357TF-BSN-M	Brass	AWG#20	X9357H
PART NO	Material	Wire Range	Suitable XKB Housing

ANGULAR	
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

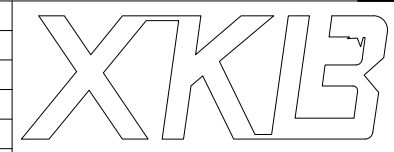

DESIGN	阿 树	
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE: 4.20mm Crimp Style Connectors
PART NO.: X9357TF-BSN-M
DWG NO.: