
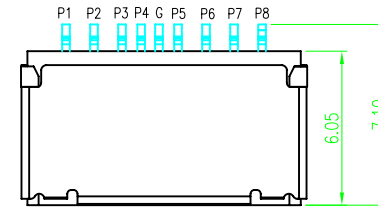

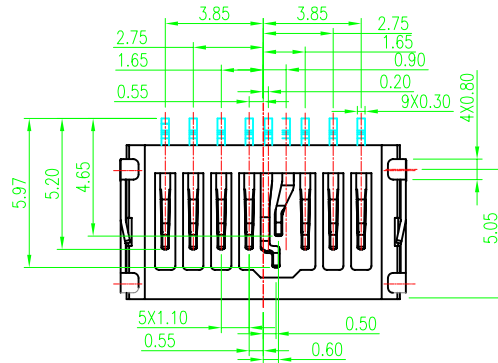
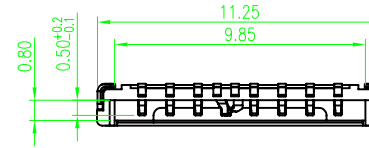


RoHS


Kinghelm®

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED

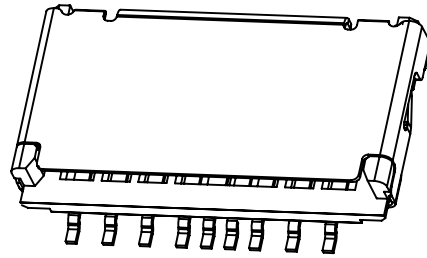

NOTES:

- MATERIAL:
 - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal: Copper Alloy.
 - Shell: Stainless Steel.
- SPECIALITY:
 - Rated current: 0.5A
 - Rated voltage: 30V
 - Contact Resistance: 50mΩ MAX
 - Insulation Resistance: 100MΩ MIN 100V DC
 - Dielectric withstanding voltage: 100V AC.
 - Solder ability: 235±5°C, 5±0.5s.
 - Durability: 5000 Cycles Min.
 - Operating condition: Temperature -40°C~+85°C; Humidity 80% R.H MAX
- PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

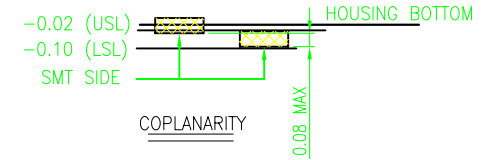


RECOMMEND PCB LAYOUT


RECOMMEND TOLERANCE: +/-0.05MM

FRAME OF CONNECTOR: - - - - -

pin number	pin name
G1	switch
pin 8	RSV
pin 7	DO
pin 6	VSS
pin 5	SCLK
pin 4	VDD
pin 3	DI
pin 2	CS
pin 1	RSV

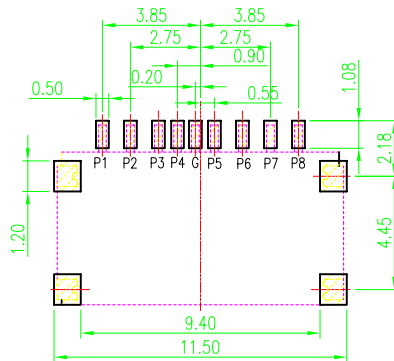

RECOMMEN P.C.BOARD LAYOUT
GENERAL TOLERANCE ±0.05



MILLIMETERS	INCH	UNITS	MM	深圳市金航标电子有限公司	www.kinghelm.com.cn
X° ± 2'	X° ±	MAT'L	MM	KH-TF09-H1.7	0755-28190160
.X ± 0.25	.XX ±	SEE NOTES	PA	TITLE: T-flash短型中间PIN	H=1.70mm
.XX ± 0.20	.XXX ±	FINISH	APPD:	DWG NO.: HJR-TFD09-17A	
.XXX ± 0.15	.XXXX ±	SEE NOTES	QTY	CHKD: Michael F	
		SEE NOTES	DR:		
					SCALE SHEET REV. 1:1 1/2 A0