


DETAIL A FLEX LAYER

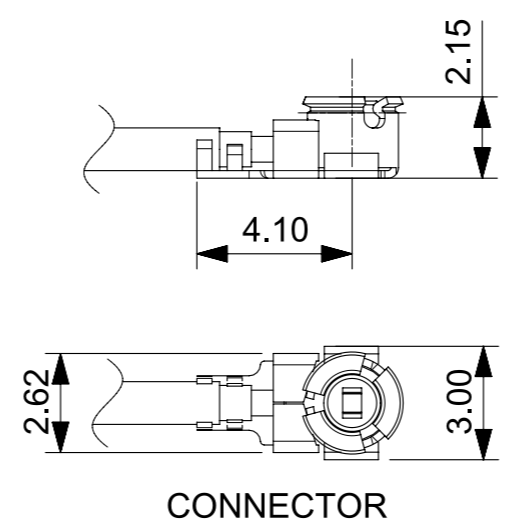

ITEM	CABLE TYPE	CABLE LENGTH"L"
1	CABLE 50mm	43mm
2	CABLE 100mm	93mm
3	CABLE 150mm	143mm
4	CABLE 200mm	193mm
5	CABLE 250mm	243mm
6	CABLE 300mm	293mm

NOTE:

- MATERIAL
FLEX:53mm*18mm
CONNECTOR:OD1.13,2.5H UFL CONNECTOR(COLD PLATED)
- CAN NOT LIFT UP CABLE IN VERTICAL DIRECTION.
- Ni&Au PLATING IN THE SOLDER PAD AREA:Ni:1~3um,Au:Min 0.025um THICKNESS.
- SOLDER MASK:BLACK.
- APPLICATION SPEC PLEASE REFER TO AS OF AS-146186-100
- PRODUCT SPEC PLEASE REFER TO PS OF PS-146186-100
- PACKAGING SPEC REFER TO PK OF PK-146186-001

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				DIMENSION UNITS		SCALE							
▽A	= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		mm	3:1	DRWN BY		DATE						SD FOR GPS/WIFI (2.4/5GHz) COMBO BALANCE FLEX ANTENNA	
▽E	= 0	ANGULAR TOL ± 0.5 °		Kang Cheng		2017/09/22		PRODUCT DESIGN DRAWING							
▽EP	= 0	4 PLACES	±	CHK'D BY		DATE						SERIES			
▽	= 0	3 PLACES	± 0.05	Colin Xu		2017/09/22		146186		SEE TABLE					
▽C	= 0	2 PLACES	± 0.15	APPR BY		DATE						DOCUMENT NUMBER			
▽	= 0	1 PLACE	± 0.2	Stary Song		2017/09/22		SD-146186-050							
⊠	= 0	0 PLACES	± 0.5	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE						THIRD ANGLE PROJECTION			
■	= 0			A3											
▽	= 0			C											